MILITARY SPECIFICATION

RAINCOAT, MAN'S, LIGHTWEIGHT, COATED

This specification is approved for use by the Navy Clothing and Textile Researc Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a man's lightweig coated fabric raincoat with removable liner.

1.2 Classification. The raincoats shall be of one type and in the followin sizes and lengths:

1.2.1 Sizes. 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, and 48.

1.2.2 Lengths. Short, Regular and Long

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

V-F-106	-	Fasteners, Slide, Interlocking
V-B-871	-	Button, Sewing Hole, and Button, Staple (Plastic)
V-T-280	-	Thread, Cotton Gimp, Buttonhole
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing and Textile Research Facility, 21 Strathmore Rd., Natick, MA 017 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Military

MIL-C-326	-	Cloth, Silesia, Cotton
MIL-B-371	-	Braid, Textile, Tubular
MIL-T-3530	-	Thread and Twine; Mildew Resistant or Water Repellent Treated
MIL-C-17155	-	Cloth, Knitted, Nylon, Fleece
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29102	-	Cloth, Coated, Polyurethane on Polyester
MIL-C-43836	-	Cloth, Interlining, Non-woven
MIL-T-43548	-	Thread, Polyester, Cotton-covered

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1393	-	Provisions for Evaluating Quality of Coated Fabric Raincoats

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association. Attn: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606).

3. REQUIREMENTS

3.1 Guide sample. Samples when furnished are solely for guidance to the contractor (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish a sample unit(s) for first article approval (see 6.2).

3.3 Materials.

3.3.1 Cloth, coated. The basic material for the outershell shall be a polyurethane coated polyester cloth conforming to MIL-C-29102.

* 3.3.2 Cloth, fleece. The cloth used for the removable liner shall be a nylon fleece conforming to type III of MIL-C-17155. The color shall be Black 3234.

* 3.3.3 Binding. The material used for binding the raincoat and liner shall be a plain or twill weave fabric woven with multifilament rayon or polyester yarns. The cloth shall be dyed black. The cloth shall be bias-cut into strips 1 to 1 1/4 inches wide and shall conform to the following requirements when tested as specified in 4.3.1:

Weight, oz. sq. yd	- 3.7	
Yarns per inch		
Warp	- 120	(MIN)
Filling	- 50	(MIN)
Colorfastness to:		
Perspiration	- Good	
Wet dry cleaning	- Good	
Crocking	- Good	
Laundering	- Good	

3.3.4 Interlining. The cloth for the interlining shall be a woven fabric conforming to type I of MIL-C-326 or a non-woven fabric conforming to type II, class 1 of MIL-C-43836. The color shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

3.3.5 Hanger loop. The hanger loop shall be made of the same material as specified in 3.3.1 or shall be a tubular braid conforming to type III, or V, class 1 of MIL-B-371 except that colorfastness to laundering only shall apply. The color of the braid shall be black.

3.3.6 Thread, polyester/cotton covered. The thread shall be dyed shade Black AA, Cable No. 66043 and shall conform to MIL-T-43548. The thread shall have a water-repellent finish conforming to type II, class 3 of MIL-T-3530. The thread shall not be lubricated by any means prior to or during seaming. Thread sizes are as follows:

Use	Ticket No.	Ply
General seaming and stitching	70 and 80 1/	2 or 3
Buttonholes, bartacks, and buttons	36	2 or 3
Buttons, hand stitched	16	2 or 3

1/ Ticket number 100 may be substituted for 80.

3.3.6.1 Colorfastness of thread. The dyed thread shall show fastness to light and laundering equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available the dyed thread shall show "good" fastness to light and laundering when tested as specified in MIL-T-43548.

3.3.7 Gimp Cotton. The cotton gimp for reinforcing the buttonholes shall be dyed Shade Black AA, C.A. 66043 and shall conform to type I or type II, size No. 8 of V-T-280.

3.3.7.1 Colorfastness. The dyed gimp shall show fastness to laundering equal to or better than the standard sample, when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show "good" fastness to laundering when tested as specified in V-T-280.

3.3.8 Buttons, plastic. The buttons shall conform to type II, class D, style 20 and 21, 24-line and 45-line, and style 15, 18-line of V-B-871. The color shall be black BT, Cable No. 62001.

* 3.3.9 Eyelets. The eyelets used for underarm ventilation shall be brass or aluminum with a black chemical or enamel finish. The inside diameter of the eyelet shall be 1/8 to 3/16 inch. As an alternate, machine sewn eyelets may be used (see 4.3.1).

*3.3.10 Slide fastener. The slide fastener for the raincoat and liner shall be Type IV, style I, size LS, with short tab pull conforming to V-F-106, except that all metal components of slide fastener shall be fabricated of brass and be from the same supplier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

3.3.10.1 Length of slide fastener. The length of the fastener shall be 64 inches for short, 68 inches for regular, and 72 inches for long.

* 3.3.10.2 Tape for slide fastener. The slide fastener tape shall be made of cotton or synthetic or a combination. The tape shall be dyed black and show good fastness to drycleaning and laundering as specified in V-F-106.

* 3.3.11 Labels.

3.3.11.1 For raincoat. Each raincoat shall have a combination identification-size-instruction label conforming to type I, classes 1, 2, and 3 of DDD-L-20. The printing shall show fastness to laundering and shall bear the following inscription:

RAINCOAT, MAN'S, LIGHTWEIGHT, COATED
FIBER CONTENT: 100% POLYESTER
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 40R (EXAMPLE)
NAME OF CONTRACTOR:

INSTRUCTIONS

Clean raincoat separately from liner
Hand launder raincoat with warm water and soap.
Rinse thoroughly and hang to drip dry
DO NOT DRY CLEAN
To clean liner see instructions on liner

3.3.11.2 For liner. Each liner shall have a combination identification-size-instruction label conforming to type 1, classes 1, 2, and 3 of DDD-L-20. The printing shall show fastness to laundering and dry cleaning and shall bear the following inscription:

Removable Liner, Raincoat, Man's
Fiber Content - 100% Nylon
Stock No.: 8405-00-000-0000 (EXAMPLE)
Size: 40R (Example)

INSTRUCTIONS

Clean liner separately from raincoat
Liner may be laundered or dry cleaned
To clean raincoat see instructions on raincoat

NOTE: Abbreviations for applicable lengths of raincoat and liner shall be "S" for short; "R" for regular; and "L" for long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

* 3.4 Design. The raincoat shall be single breasted with a button fly front, center back vent, set-in sleeves, welted side pocket with thru openings, shoulder straps, and a facing storm tab. In addition, the raincoat shall have a sleeveless type removable liner with slide fastener and pocket openings corresponding to the thru side pockets of raincoat.

3.5 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall control.

3.6 Patterns. Standard patterns will be furnished the contractor by the Government for use in cutting his working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 1/4 inch seam allowance for regular seams, except as otherwise indicated in table I.

* 3.6.1 List of pattern parts. The component parts of the raincoat shall be cut from the materials specified and in accordance with the following pattern parts:

Materials	Nomenclature of pattern parts	Cut parts
Cloth, coated, polyurethane	Back	2
	Front	2
	Front facing	2
	Top sleeve	2
	Undersleeve	2
	Topcollar	1
	Undercollar	1
	Collarstand (top and under)	2
	Shoulder strap	4
	Facing tab (left side)	1
	Pocket welt	2
	Facing strip (pocket opening)	2
	Vent facing (right side)	1
	Stay reinforcement (eyelets)	2
	Back yoke	1
	Fly (front)	2
	Pocket (inner and outer)	4
	Neckpiece	1
Cloth, fleece	Back 1/	1
	Front 1/	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Materials	Nomenclature of pattern parts	Cut parts
Cloth, interlining	Collar	1
	Collarstand	1
	Shoulder strap	2
	Pocket welt	2
	Front facing	2
	Neckpiece	1
Templates	Undercollar quilting marker	-
	Fly marker	-
	Buttonhole marker	-

1/ The fleece liner may be cut as one piece with the side seam allowances omitted.

3.7 Construction

3.7.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the raincoat. Unless otherwise specified in Table I, all top and edge stitching shall be 1/4 (± 1/16) inch from the edge. In order to minimize the size of the needle hole in the coated fabric, the needle used for seaming operations shall be the smallest size which will accommodate the specific size of thread.

3.7.2 Thread breaks and ends of seams. Ends of all seams and stitchings not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.8 Manufacturing operations requirements. The raincoats shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished raincoats are identical to that produced by following the sequence of operations as listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

3.8.1 Shade and size marking. The component parts of the raincoat shall be marked, bundled or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Metal fastening devices
(2) Sew-on tickets
(3) Adhesive type tickets that discolor or adhere to the material upon removal of tickets.

NOTE: The use of an ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the raincoat in strict accordance with patterns furnished, which show size, shape, placement of component parts, directional lines and notches for proper assembly of all parts. b. Cut all parts of the raincoat outershell from one piece of material except pockets, underply of shoulder straps, left facing tab, facing strip, right vent facing, back yoke, fly and eyelet stay which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. The raincoat shall finish with the uncoated (face) side out. c. All parts of the removable fleece liner shall be cut from one piece of material. The smooth or un-fleeced side of liner shall face the wearer.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1393 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Size and shade masking (see 3.8.1) Mark, bundle or ticket components unless otherwise specified, to insure uniform size and shade of raincoat.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make collar					
	a. Mark undercollar stitching lines in accordance with template.					
	b. Join interlining to coated side of undercollar in accordance with the marked triangular stitch lines.	301	SSv-1	8-10	70	70
	c. Stitch interlining to coated side of collarstand underply along all outer edges.	301	SSa-1	8-10	70	70
	d. Stitch underply of collarstand to undercollar, face to face.	301 or 401	LSq-2(a)	8-10	70 70	70 80
	e. Turn to finished position (stand over collar) and topstitch 1/8 (± 1/16) inch from folded edge.	301	LSq-2(b)	8-10	70	70
	f. Stitch top ply of collarstand to top collar, face to face.	301 or 401	LSq-2(a)	8-10	70 70	70 80
	g. Turn to finished position (stand over collar) and topstitch 1/8 (± 1/16) inch from folded edge.	301	LSq-2(b)	8-10	70	70
	h. Stitch topcollar to undercollar, face to face, along the top and side edges. Trim the corners, turn to finished position and work out points and edges.	301	SSe-2(a)	8-10	70	70
	i. Topstitch the top and sides of collar 1/4 (± 1/16) inch from folded edge.	301	SSe-2(b)	8-10	70	70
	j. Stitch bottom of assembled collar 1/16 inch from raw edge.	301 or 401	SSa-1	8-10	70 70	70 80

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make and attach hanger loop					
	a. When the hanger loop is made of the basic material fold the strip of material, back to back, turn in the raw edges and stitch. The hanger loop shall finish 1/4 to 3/8 inch wide.	301 or 401	EFp-1 or EFS-2	8-10	70 70	70 80
	b. Center ends of the loop on the bottom raw edge of collarstand with approximately a 2 inch spread between ends. Backstitch or bartack the ends back from the raw edge making sure the stitching does not show on the outside of collarstand in the finished raincoat. As an alternate, the hanger loop may be simultaneously inserted and stitched during operation 20.	301 or bartack		8-10 21 per bartack	70 36	70 36
6..	Make shoulder straps					
	a. Stitch the interlining to the top and bottom pieces of shoulder straps (face to face) along the sides and point.	301 or 401	SSe-2(a)	8-10	70 70	70 80
	b. Trim the point, turn to finished position and work out point and edges.					
	c. Topstitch the sides and point 1/4 (± 1/16) inch from the folded edge.	301	SSe-2(b)	8-10	70	70
	d. Mark and stitch buttonholes (see operation 24).					
	e. The shoulder straps shall finish 2 1/4 (± 1/4) inches wide at the armhole, tapering to 1 3/4 (± 1/4) inches at base of point.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table - Construction

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Make facing tab					
	a. Fold face to face, as indicated on pattern and join along the sides and point.	301 or 401	SSe-2(a)	8-10	70 70	70 80
	b. Trim the point, turn to finished position and work out point and edges.					
	c. Topstitch the sides and point 1/4 (± 1/16) inch from the folded edge.	301	SSe-2(b) and OSf-1	8-10	70	70
	d. Mark and stitch buttonhole (see operation 24)					
	e. The facing tab shall finish 1 3/4 to 2 inches wide.					
8.	Make sleeves					
	a. Join the topsleeve and undersleeve at the outseam. The folded edge shall face towards the back of sleeve.	301 or 401	LSq-2 or LSr-2 or LSc-2	8-10	70 70	70 80
	b. Join the topsleeve and undersleeve at the inseam face to face, 3/8 to 1/2 inch from raw edge.	301 or 401	SSa-1	8-10	70 70	70 80
	c. Fold under bottom of sleeve forming a 3/4 to 1 inch wide hem and stitch 1/16 to 1/8 inch from the inside folded edge, simultaneously folding seam allowance toward back of sleeve.	301	EFb-1	8-10	70	70
9.	Make back and back vent					
	a. Join the two back pieces at center back. The folded edge of seam shall face towards the right side of raincoat. The stitching shall extend from neckline to approximately 1/4 inch below top of vent opening.	301 or 401	LSq-2 or LSr-2	8-10	70 70	70 80

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make back and back vent (cont'd)					
	b. Fold under bottom edge of yoke (back to back) to form a 1/4 to 3/8 inch wide hem and stitch 1/16 to 1/8 inch from raw edge.	301 or 401	EFa-1	8-10	70 70	70 80
	c. Center and stitch on all four sides a combination identification-size instruction label to the yoke (face side) with the bottom edge of label 1/2 to 3/4 inch above the folded edge of finished hem.	301	LSbj-1	8-10	70	70
	d. Stitch the shoulder, armhole, and neck edges of the yoke to the assembled back, back to back.	301	SSa-1	8-10	70	70
	e. Fold back left vent in line with center seam and bottom notch and stitch 1/4 inch from the front folded edge.	301	OSf-1	8-10	70	70
	f. Center and stitch a 24 line button to left facing one-half the distance between the top and bottom of vent. Button shall be sewn thru vent facing only and reinforced with a self fabric patch.	Hand or 301 or 101		4 per button double thd. 14-16 per button 14-16 per button	16 36 36	 36 36
	g. Fold under the back raw edge of left facing and stitch thru left back 1/16 to 1/8 inch from back folded edge of facing. Left facing shall finish 1 3/8 (± 1/8) inch wide.	301	LSd-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make back and back vent (cont'd)					
	h. Position right vent facing piece on right back face to face, with the facing extending approximately 2 inches beyond the top opening of vent and stitch along length of straight edge. Turn facing to finished position and edge stitch, 1/16 to 1/8 inch from folded edge; with the stitching extending approximately 3/4 inch above top opening of vent.	301	SSe-2	8-10	70	70
	i. Fold under raw edges at both sides of triangular top and along back edge of right vent facing and stitch to the right back, 1/16 to 1/8 inch from the folded edge. The point of the triangle shall be approximately centered on the back seam. The finished width of the right facing shall be 2 3/8 (± 1/8) inches wide.	301	LSd-1	8-10	70	70
	j. Stitch a 3/8 (± 1/8) inch wide boxstitch across the base of the triangle. The lower row of boxstitching shall finish approximately 1 3/4 inches below point of triangle.	301	Boxstitch	8-10	70	70
10.	Make pocket welt					
	a. Place interlining piece on the coated side of the welt piece in alignment with center fold line of welt piece as indicated by marks on pattern. Stitch along length of welt just below fold line. This row of stitching shall not show on outer ply of finished welt.	301	LSbj-1	8-10	70	70
	b. Fold the welt along the center fold line, face to face, and stitch the ends 1/4 to 3/8 inch from the raw edge.	301 or 401	SSe-2(a)	8-10	70 70	70 80

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Make pocket welt (cont'd)					
	c. Trim corners; turn welt to finished position and work out edges and points. Topstitch sides and folded edge.	301	SSe-2(b) and OSf-1	8-10	70	70
11.	Make pockets					
	a. Slit inner pocket piece (ply next to shell), as indicated by pattern marks, tongue notching each end.					
	b. Stitch together the inner and outer pocket pieces, back to back, at the top, sides, and bottom.	301 or 401	SSe-2(a)	8-10	70 70	70 80
	c. Trim corners, turn pocket to finished position, and edge stitch 1/16 to 1/8 inch from folded edge.	301	SSe-2(b)	8-10	70	70
	d. Fold under the back slit edge of the inner pocket opening and stitch to the outer pocket, 1/16 to 1/8 inch from folded edge.	301	LSd-1	8-10	70	70
12.	Attach welts and pockets to front					
	a. Stitch the back raw edge of welt to the front as indicated by marks on patterns. The welt shall finish 1 3/4 (± 1/8) inches wide.	301	LSbj-1	8-10	70	70
	b. Fold the pocket facing piece in half lengthwise back to back, and stitch to front.	301	LSbj-1	8-10	70	70
	c. Cut the front between two rows of stitching, tongue notching each end. Turn facing piece to the underside of front with seamline finishing just in back of the front folded edge. Fold under back raw edge of facing piece forming a 1/4 to 5/8 inch wide facing, and stitch 1/16 to 1/8 inch from folded back edge.	301	LSd-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Attach welts and pockets to front 9cont'd)					
	d. Position inner pocket ply on welt and stitch to welt and front seam allowance; through pocket, welt, and front.	301	SSq-2(a)	8-10	70	70
	e. Turn pocket through opening; place welt in its finished position and top stitch welt through front and inner ply of pocket 1/16 to 1/8 inch from folded edge.	301	SSq-2(b)	8-10	70	70
	f. With welt and pocket in finished position, box-stitch each end of welt thru all plies; the outer row of boxstitching shall be 1/16 inch from folded edge and the inner row superimposed on the welt stitching. The end of boxstitch on side next to pocket opening shall be finished off with a diagonal stitch. The finished welt shall measure 7 3/4 (± 1/4) inches long.	301	-	8-10	70	70
13.	Prepare facings and neck piece					
	a. Position interlining on underside of facing with back edges even and stitch back edge.	301 or 401	SSa-1	8-10	70 70	70 80
	b. Position interlining on underside of neck piece with bottom edges even and stitch bottom edge	301 or 401	SSa-1	8-10	70 70	70 80
	c. Join face to face, the ends of neck piece to ends of facings at top.	301	SSa-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Prepare facings and neck piece (cont'd)					
	d. Bind entire back edge of assembled facings and neck piece simultaneously catching the facing tab on underside of left facing as indicated by marks on pattern. Seam allowance of neck piece and facings may be folded to the right or left.	301	BSc-1	8-10	70	70
	e. Position fly piece on left front facing, face to face in accordance with notches on patterns. Stitch inward for a distance of 3/4 (±1/8) inch at top notch downward parallel to and 3/4 (±1/8) inch from front raw edge and then outward at bottom notch.	301	SSe-2(a)	8-10	70	70
	f. Cut facing and fly piece diagonally at each corner to the line of stitching. Turn fly to finished position and edgestitch the front and the top and bottom step of fly.	301	SSe-2(b)	8-10	70	70
14.	Make buttonholes on fly piece					
	a. Make three (3) horizontal, eyelet end, taper bar buttonholes reinforced with gimp through the facing and fly piece in accordance with the pattern markings. The ends of the buttonholes shall be securely tacked. The purling of the buttonhole shall be on the facing side.					
	b. The buttonholes shall be 1 1/8 (±1/8) inches long with the inside edge of eyelet positioned 1/2 (± 1/8) inch from the finished front edge.	Button-hole		60-65 per buttonhole including tack	36	36

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Attach second fly piece					
	a. Position second fly piece under the left front fly piece, face to face, with raw front edges above and below steps of facing even, and stitch front edge. The finished folded edge of buttonhole section on first fly piece shall be set back 3/4 (±1/8) inch from raw edge of second fly piece.	301 or 401	SSa-1	8-10	70 70	70 80
16.	Tack or bartack buttonhole fly					
	Stitch two vertical or horizontal tacks or bartacks each one centered between the three buttonholes thru all plies of assembled facings. The tack or bartack shall be 3/8 to 1/2 inch long, and 1/2 (± 1/8) inch from front folded edge of buttonhole fly.	Bartack or 301	---	21-28 per bartack 8-10	36 70	36 70
17.	Join fronts to back					
	Join the fronts to the back at the sides and shoulders (back over front).	301 or 401	LSq-2 or LSr-2 or LSc-2	8-10	70 70	70 80
18.	Set sleeves and shoulder straps					
	a. Center the width of the back raw edge of shoulder strap on shoulder seam at armhole. Stitch strap and trim even with the armhole. In finished position the point of strap shall fall on the shoulder seam 3/8 (±1/8) inch from the lower collarstand seam.	301	SSa-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Set sleeves and shoulder straps b. Stitch the sleeve in the armhole, 3/8 to 1/2 inch from the raw edge, distributing the fullness evenly simultaneously catching the end of the shoulder strap and eyelet stay reinforcement piece in the stitching. The eyelet reinforcement piece shall be centered, back to back, at the base of the armhole. Stitch remaining two sides of reinforcement piece to front, 1/16 to 1/8 inch from raw edge.	301	LSq-2(a) and LSbj-1	8-10	70	70
19	c. Bind the raw edge of armhole. Ends of binding shall be turned under and overlapped not less than 1/2 inch, or be concealed on the underside and securely caught in the stitching.	301	BSc-1	8-10	70	70
	d. Turn sleeves and shoulder strap to finished position and topstitch upper section of armhole 1/4 (± 1/16) inch from folded edge, simultaneously catching the shoulder strap and binding. Upper topstitching shall start at junction of topsleeve seam on back of coat up back and across strap ending approximately 3 inches beyond front edge of strap on front of coat. Each end of 1/4 inch stitching shall be finished off with a squared-off step. The lower section of the armhole shall be topstitched 1/16 to 1/8 inch from folded edge.	301	LSq-2(b)	8-10	70	70
	e. Attach or stitch three (3) eyelets thru eyelet stay reinforcement and front as indicated by marks on pattern.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Join assembled facings to fronts					
	a. Stitch assembled left facing to left front, face to face, starting at lapel notch, across top of lapel, down front edge and along bottom of coat to back edge of facing.	301 or 401	SSe-2(a)	8-10	70 70	70 80
	b. Stitch assembled right facing to right front starting at lapel notch, across top of lapel, down front edge and along the bottom of coat to back edge of facing.	301 or 401	SSe-2(a)	8-10	70 70	70 80
	c. Trim corners of facings, turn to finished position and work out edges and points.					
20.	Join collar to outer shell and assembled facing					
	a. Position bottom edge of assembled collar between outershell and assembled facing and join at collar gorges.	301	SSq-2(a)	8-10	70	70
	b. Stitch the undercollar stand to the neckline notching where necessary. The undercollar shall finish over the back.	301	SSa-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Join collar to outershell and assembled facing					
	c. Turn under the raw edge of the top collar stand with edges of facing and outershell under the top collarstand, stitch through all plies from lapel notch to lapel notch, 1/16 to 1/8 inch from folded edge (see operation 5.b).	301	SSq-2(b)	8-10	70	70
	NOTE: 1. The collar shall finish 2 1/2 (± 1/8) inches wide at center back. 2. The collar stand shall finish 1 1/2 (± 1/8) inches wide at center back.					
21.	Complete left fly					
	a. Using the fly template, mark the position for the fly stitching on the left front.					
	b. Stitch the left front through all plies 2 1/2 (± 1/8) inches from the front edge, starting 3 to 4 inches above top buttonhole and continuing down parallel to the front edge to a position approximately 1 inch below bottom buttonhole then tapering in a curve to the front edge 2 to 3 inches below bottom buttonhole.	301	SSv-1	8-10	70	70
22.	Hem bottom					
	Turn up bottom of coat forming a 7/8 (± 1/8) inch finished hem and stitch 1/16 to 1/8 inch from folded inner edge. The ends of the stitching shall extend across the width of the hem catching the inner folded edges of the front facings.	301	EFb-1	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Stitch edges of raincoat Topstitch the fronts, lapels, and facing bottoms. 1/4 (± 1/16) inch from folded edges.	301	SSe-2(b)	8-10	70	70
24.	Make buttonholes a. All buttonholes shall be eyelet end, taper bar type and reinforced with gimp. Buttonhole ends shall be securely tacked. The purling shall finish on the outside.					
	b. Buttonholes shall be measured from the inside edge of the eyelet and positioned as follows:	Button-hole	-	55-60 per buttonhole including tack	36	36
	1. Stitch a 5/8 to 3/4 inch long vertical buttonhole on the right vent facing 5/8 to 3/4 inch from the folded edge of vent to correspond with button for left facing.					
	2. Mark and stitch a 5/8 to 3/4 inch long horizontal buttonhole on the lapel of the left front, 5/8 to 3/4 inch in from the left front edge and 1 1/4 (± 1/8) inches below the lapel step.					
	3. Mark and stitch 5/8 to 3/4 inch long buttonholes on the shoulder straps and left facing tab, centered, and 3/4 to 7/8 inch from the point. Length of buttonholes shall be parallel to the sides of the straps and tab.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
25.	Tack or bartack pocket to facing					
	Tack or bartack the top and bottom edges of pocket to facing approximately 1 inch from bound edge of facing. The length of tack or bartack shall be 3/8 to 1/2 inch and parallel with the pocket edges.	Bartack or 301		21-28 per bartack 8-10	36 70	36 70
26.	Set slide fastener on raincoat					
	a. Fold length of slide fastener in half so that when the fold is centered on the facing neck piece, the ends of the fastener are equal distance from bottom edge of raincoat. Place the slide fastener on underside of facing with the chain even with or no more than 1/8 inch back from bound edge of facing. The separating pin of the slide fastener shall finish on the right side.					
	b. Turn under ends of tape 1/2 to 3/4 inch and stitch the entire length of tape to facing 1/8 to 1/4 inch from back edge of tape. The tape shall be held loose during the stitching.	301	SSa-1	8-10	70	70
	NOTE: When ends of fastener tape are prefinished or fused no turn under of ends is required.					
27.	Mark and stitch buttons					
	a. Mark and stitch three 45-line buttons with 18-line stay buttons to the right front to correspond to the left fly buttonholes 2 3/8 inches from the finished front edge.	Hand or 301 or 101		4 per button double thread 14-16 per button 14-16 per button	16 36 36	 36

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
27.	Mark and stitch buttons (cont'd)					
	b. Mark and stitch a 24-line button with an 18-line stay button to the right front to correspond to the left facing tab buttonhole.	Hand		4 per button	16	
		or		double thread		
		301		14-16 per button	36	36
		or				
		101		14-16 per button	36	
	c. Mark and stitch a 24-line button to each shoulder seam to correspond to each shoulder strap buttonhole.	Hand		4 per button	16	
		or		double thread		
		301		14-16 per button	36	36
		or				
		101		14-16 per button	36	
	d. Mark and stitch a 24-line button 2 3/8 (± 1/4) inches from the finished edge of the right front and 1 1/4 (± 1/8) inches below the finished collar neck seam. When the coat is fully buttoned, the lapel buttonhole of the left front and the corresponding button shall be free of stress and distortion. The button shall be sewn through the front only, reinforced on the back with a self fabric patch.	Hand		4 per button	16	
		or		double thread		
		301		14-16 per button	36	36
		or				
		101		14-16 per button	36	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
	NOTE: Hand or machine sewn buttons (except stay and shoulder buttons) shall have the thread tightly wrapped not less than four times around to form a 1/8 to 3/16 inch shank with the ends securely tacked off and thread ends hidden.					
28.	Make liner					
	a. Overedge raw edges of shoulder and side seams	503 or 504 or 505	EFd-1	8-10	70	70
	b. Stitch, face to face (smooth side) the side seam of liner, 3/8 to 1/2 inch from finished edge.	301 or 401	SSa-1	8-10	70 70	70 80
	c. Stitch, face to face (smooth side) the shoulder seam of liner 3/8 to 1/2 inch from finished edge.	301 or 401	SSa-1	8-10	70 70	70 80
	NOTE: The above operation may be performed in one operation by simultaneously stitching and overedging.					
	d. Slit pocket openings on fronts as indicated by marks on patterns.					
	e. Bind all remaining raw edges of liner parts, neck, bottom vent, pocket openings and armholes. Ends of binding shall be turned under and overlapped not less than 1/2 inch. As an alternate, the ends of binding may be folded to the underside (fleece side) and caught in the binding stitch.	301 or 401	BSc-1	8-10	70 70	70 80

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
28.	Make liner (Cont'd) f. Center and stitch on all four sides, a combination identification size instruction label to the face (smooth) side of the liner, 3 (± 1/2) inches below the back neckline.	301	LSbj-1	8-10	70	70
29.	Set slide fastener on liner a. Fold length of slide fastener in half so that when fold is centered on back at neckline, the ends of the fastener are equidistant from bottom edge of liner. Place slide fastener on underside of liner with the back edge of chain even with the front folded edge of binding. The retainer of slide fastener shall finish on the right side.					
	b. Turn under ends of tape 1/2 to 3/4 inch and stitch entire length of tape to liner approximately 1/4 inch from back edge of tape and adjacent to the row of binding stitch. NOTE: When ends of slide fastener tape are prefinished or fused, no turn under of ends is required.	301	SSa-1	8-10	70	70
30.	Clean raincoats and liners a. Trim all thread ends and remove all loose threads. b. Remove all spots or stains. c. Remove all shade and size marking tickets.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Table I - Construction of raincoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
31.	Pressing Pressing of this raincoat is not required but is permitted when the contractor considers pressing to be part of his standard operating procedure. When employed, pressing shall be performed on the cloth side of the basic material only and at a maximum temperature of 250½F (121½C). Pressing shall be discontinued if coating becomes soft, tacky, stiff or visibly degraded.					
32.	Attach liner to raincoat a. Match liner to raincoat by size. b. Close slide fastener, check to insure free manipulation of slider.					
33.	Button raincoat Button shoulder straps, vent and front, except collar and fly tab.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

* 3.9 Sizes and measurements - Sizes and measurements of the finished raincoats and liners shall be as shown in Tables II and III (see figures 1 and 2). All measurements and tolerances are expressed in inches.

Table II - Sizes and measurements of raincoats

Size	(A) Chest	Center back length (B) Short	Regular	Long	Sleeve inseam length (C) Short	Regular	Long
28	38	39 7/8	42 1/8	44 3/8	16 1/4	17 1/2	18 3/4
30	40	40 1/8	42 3/8	44 5/8	16 1/4	17 1/2	18 3/4
32	42	40 3/8	42 5/8	44 7/8	16 1/4	17 1/2	18 3/4
34	44	40 5/8	42 7/8	45 1/8	16 1/4	17 1/2	18 3/4
36	46	40 7/8	43	45 1/4	16 1/4	17 1/2	18 3/4
38	48	41	43 1/4	45 1/2	16 1/4	17 1/2	18 3/4
40	50	41 1/4	43 1/2	45 3/4	16 1/4	17 1/2	18 3/4
42	52	41 1/2	43 3/4	46	16 1/4	17 1/2	18 3/4
44	54	41 3/4	44	46 1/4	16 1/4	17 1/2	18 3/4
46	56	41 7/8	44 1/8	46 3/8	16 1/4	17 1/2	18 3/4
48	58	42	44 1/4	46 1/2	16 1/4	17 1/2	18 3/4
Tolerance +1 -1/2		± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

(A) Chest - With the coat buttoned, the measurement shall be taken across the chest at base of armholes from folded edge to folded edge and doubled.

(B) Center back length - Measurement shall be taken from the lower edge of collarstand and down center back to bottom of raincoat.

(C) Sleeve inseam length - Measurement shall be taken along inseams from armhole seam to bottom of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

* Table III - Sizes and measurements of liners

Size	Length A			Chest B
	Short	Regular	Long	Short, Regular, and Long
28	29 3/4	32	34 1/4	16 7/8
30	30	32 1/4	34 1/2	17 3/4
32	30 1/4	32 1/2	34 3/4	18 1/2
34	30 1/2	32 3/4	35	19 3/8
36	30 3/4	33	35 1/4	20 1/4
38	31	33 1/4	35 1/2	21 1/8
40	31 1/4	33 1/2	35 3/4	22
42	31 1/2	33 3/4	36	22 7/8
44	31 3/4	34	36 1/4	23 3/4
46	32	34 1/4	36 1/2	24 5/8
48	32 1/4	34 1/2	36 3/4	25 1/2
Tolerance	± 3/8	± 3/8	± 3/8	± 1/2

A. Length - Measurement shall be taken from top of neck binding, down center back to bottom.

B. Chest - With the liner folded in half lengthwise measure across chest one inch below armhole from folded edge to bound edge of liner.

* 3.10 Coating repairs on finished raincoat

3.10.1 The number of repairs allowed on the coated side of each raincoat shall not exceed four. Repairable coating defects generated during the manufacture of the raincoat shall be as follows:

a. Scuffs. Scuffs (breaks) in the coated surface not exceeding 1/16 inch in width or 1 1/2 inches in length, may be repaired. The finished repaired area shall not exceed 1/2 inch in width and 2 inches in length.

b. Pinholes. The finished repaired area shall not exceed 1/2 inch in diameter.

c. Needle-holes. Needle-hole damaged areas resulting from runoffs may be repaired. The finished repaired area shall not exceed 1/2 inch in width and 1 1/2 inches in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

(d) Pick-offs. In areas where the coating has been separated and removed from the base fabric, may be repaired. The repaired area shall not exceed 1/2 inch in diameter.

3.10.2 Repair compound. The repair compound shall be a black pigmented solvent solution of polyurethane that is self curable, has good adherance to and is fully compatible with the coated side of raincoat (see 4.3.1).

3.10.3 Repair procedure. Each repairable area shall be coated with a minimum of two coats of the repair compound on the coated side of the cloth. The first coat of the compound shall be brushed in and worked in such a manner as to completely wet and cover the objective area. The second coat shall be brushed smoothly and evenly over the first coating If necessary, the repaired area may be lightly dusted with a suitable dusting powder.

3.10.4 Requirements for repaired areas. The repaired area shall show no compound strike through. In addition, there shall be no lifting of the edges, cracking or flaking of the repair compound from the repaired area when subjected to a light flexing action between the hands.

3.11 Workmanship. The finished raincoats shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-1393.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. The first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

4.3 Inspections. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated in MIL-STD-1393.

* 4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, and standards unless otherwise excluded, amended, modified, or qualified in the specification or applicable purchase document. In addition, a certificate of compliance shall be submitted for the binding requirements of 3.3.3, the metal eyelet requirements of 3.3.9 and the repair compound requirements of 3.10.2.

4.3.2 Examination of the end item. The end item examination of the finished raincoats shall be as specified in MIL-STD-1393, except that a seam shall be scored as a puckered seam only when the puckering appears in over more than 1/2 the length of a seam and it seriously affects the appearance of the finished raincoat.

4.3.3 Dimensional examination. The dimensional examination of the finished raincoats shall be as specified in MIL-STD-1393.

4.3.4 Examination for matching sizes of coat and liner. The finished raincoats shall be examined for matching sizes of the coat and liner as specified in MIL-STD-1393.

4.3.5 Examination of preparation for delivery requirements. The examination to determine compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1393.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned raincoat (except top collar button), with a liner attached shall be folded to measure approximately 14 1/2 inches by 11 1/2 inches. Each folded raincoat shall be inserted into a snug-fitting clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the final closure may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C. Raincoats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twenty raincoats of one length and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather resistant grade V2s, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757 Level A packages shall be packed flat, reversed end for end, two in length, one in width, and ten in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Twenty raincoats of one length and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to grade 275, size 3A of MIL-B-17757, Level A packages shall be packed flat, reversed end for end, two in length, one in width, and ten in depth. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade weight kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, W5c, or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial packing). Raincoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the Contractor for retail distribution. Containers shall comply with the Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
RAINCOAT, MAN'S, LIGHTWEIGHT, COATED
SIZE
QUANTITY

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The raincoats are intended to be worn by male NROTC (college), JNROTC (high school) and by Officer Candidates, Commissioned Officers and Chief Petty Officers of the Navy.

6.2 Ordering Date. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Size and length required (see 1.2).
c. First article requirements (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).


6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Preparing activity:
Navy - NU
Project No. 8405-N 822

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

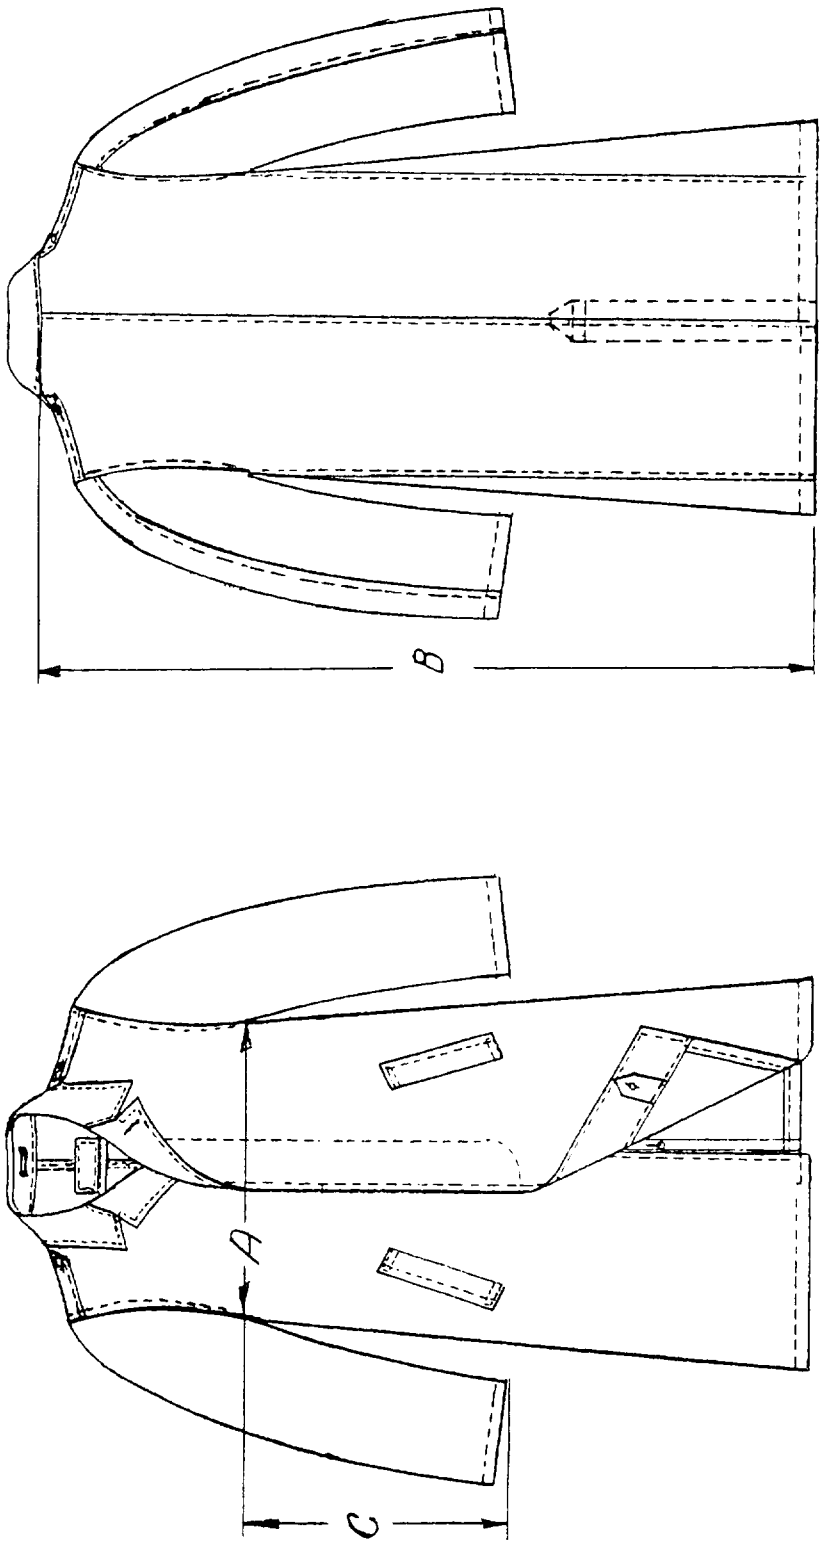


BACK

FRONT


FIGURE 1 - RAINCOAT, MAN'S LIGHTWEIGHT, COATED

16-1-668

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

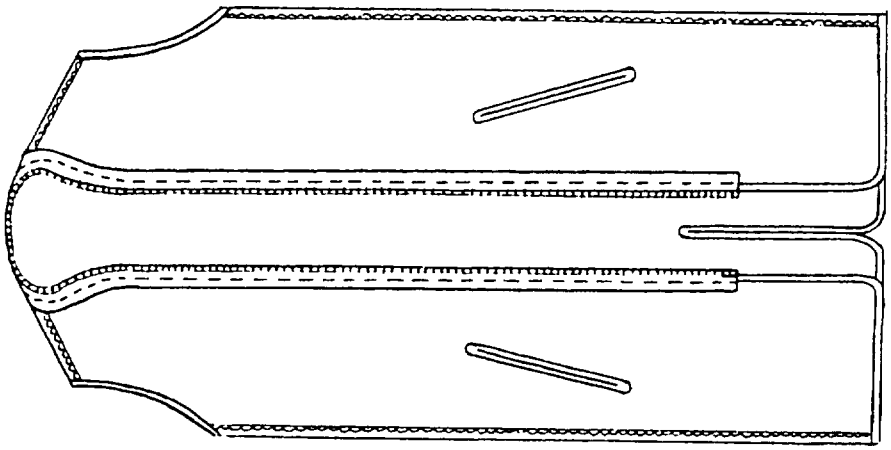

LINER

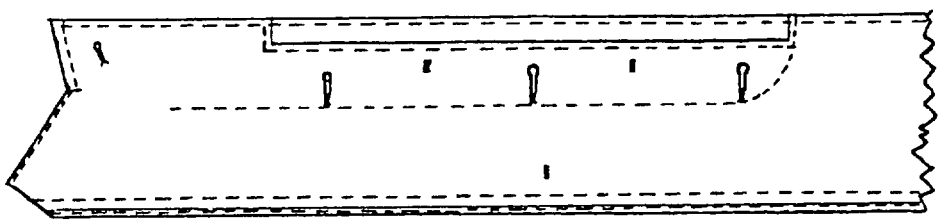

FLY FRONT, INSIDE

FIGURE 2 - RAINCOAT, MAN'S, LIGHTWEIGHT, COATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-29103B(NU) RAINCOAT, MAN'S, LIGHTWEIGHT, COATED

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:28Z
Check the source to verify that this is the current version before use.