INCH-POUND

MIL-T-27/201A
20 April 1993
SUPERSEDING
MIL-T-27/201
18 August 1977

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP DOWN, TF5SO3ZZ

(A) Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

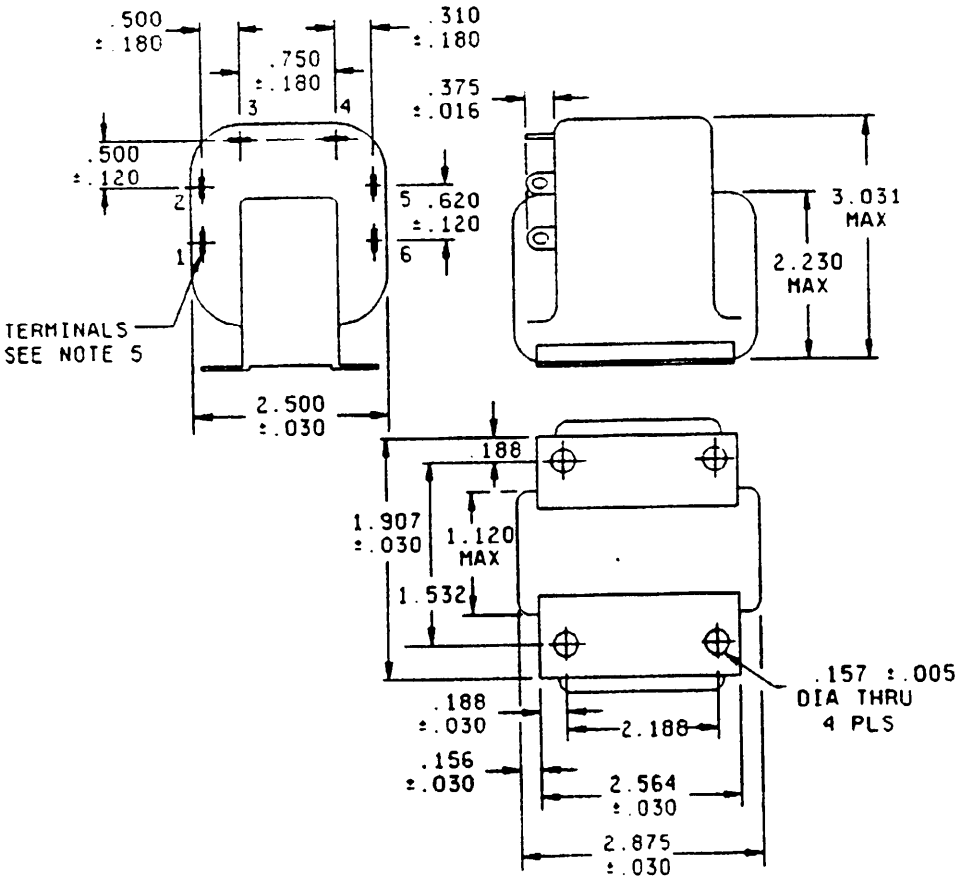


FIGURE 1. Dimensions and configurations


(A) denotes changes

FSC 5950

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:50Z
Check the source to verify that this is the current version before use.

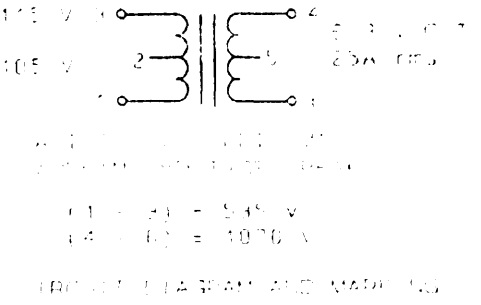

Inches	mm	Inches	mm
.005	0.13	.620	15.75
.016	0.41	.750	19.05
.030	0.76	1.120	28.45
.120	3.05	1.532	38.91
.156	3.96	1.907	48.44
.157	3.99	2.188	55.58
.180	4.57	2.230	56.64
.188	4.78	2.500	63.50
.310	7.87	2.564	65.13
.375	9.52	2.875	73.02
.500	12.70	3.031	76.99

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance on case dimensions is ±.016 inch (0.41 mm).
4. Marking shall be on the sides of the case.
5. Terminals 1, 2, and 3 shall be Zierick #70 or equivalent and terminals 4, 5, and 6 shall be Zierick #105 or equivalent.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Primary voltage (1-2-3): 105/115 volts, 380 Hz to 1,000 Hz.

Primary current (1-3): 1.4 amperes rms, maximum.

Voltamperes: 157 watts.

Secondary voltage (4-6): 6.3 volts ct.

Secondary current (4-6): 25 amperes rms, maximum.

Working voltage (peak):
(1-3): 535 volts.
(4-6): 1,070 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Solder terminals.

(1-2-3): Zierick #70 or equivalent.
(4-5-6): Zierick #105 or equivalent.
Terminal height: .375 ±.016 inch.

Weight: 680 grams, maximum.

Altitude: 70,000 feet maximum.

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 2,500 volts rms.
At barometric pressure: 1,337 volts rms.

Electrical characteristics:

No load: With 115 volts, 400 Hz across (1-3), current in (1-3) shall not exceed 400 milliamperes and the power in (1-3) shall not exceed 7.5 watts. Voltage across (4-6): 6.48 volts ct, ±5 percent.

Rated load: With 115 volts, 400 Hz across (1-3), the voltage across (4-6) shall be 6.3 volts ct, ±5 percent.

DC resistance:

(1-3): 0.8 ohm, maximum.
(4-6): 0.06 ohm, maximum.

Polarity: Additive, with terminals 3 and 5 connected

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:50Z
Check the source to verify that this is the current version before use.

Temperature [illegible]

(A) Quality assurance provisions:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1

Part or Identifying Number (PIN): M27201-01

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AR, ME, WC
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0815-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:50Z
Check the source to verify that this is the current version before use.

connections implemented as necessary