| INCH-POUND |

MIL-T-27/207A
13 March 1991
SUPERSEDING
MIL-T-27/207
20 MARCH 1978


MILITARY SPECIFICATION SHEET


TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTORS, POWER, TF5V04ZZ

Ⓐ | Inactive for new design after the date of this specification. |

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation., MIL-T-27.

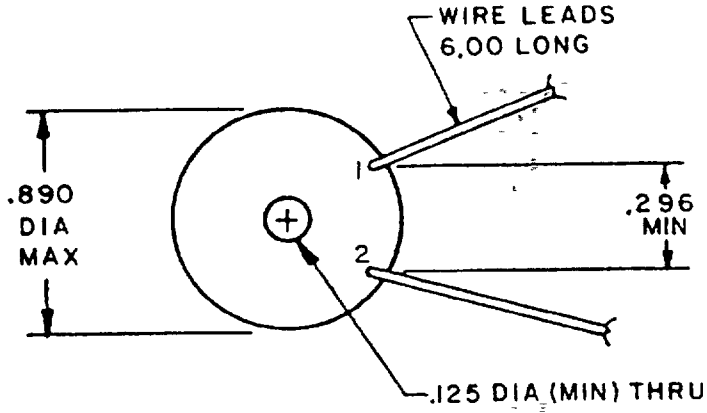

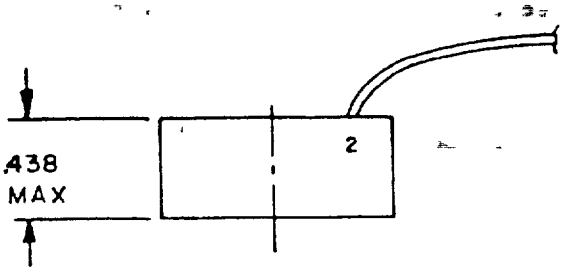



Working voltage = 115 Vrms
Altitude - 50,000 ft
CIRCUIT DIAGRAM AND MARKING

(SEE TABLE I FOR VALUE OF "X")

FIGURE 1 Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

Inches	mm
.125	3.18
.296	7.52
.438	11.13
.890	22.61
6.00	152.4

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.
5. Electrical values shall be marked as specified in table I, as applicable.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS. (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings: See table I.

Design and construction.

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Material. Epoxy.

Weight: 1 ounce.

Operating temperature range -55°C to +155°C.

Altitude: 50,000 feet.

Terminals: Wire leads, type E. number 22 AWG, 6 inches long in accordance with MIL-W-16878.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.

At reduced barometric pressure. 600 volts rms.

Electrical characteristics: See table I

Inductance With 1 volt rms, 400 Hz across (1-2), "X" A dc applied to (1-2), the inductance shall be "X" uH minimum. (For "X" see table I.)

Temperature rise: 35°C with 1.0 volt rms, 400 Hz, and rated current applied to (1-2) at an ambient temperature of 120°C.

DC resistance (1-2) See table I.

Ⓐ Quality assurance provisions

Qualification inspection: Not applicable

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location See figure 1.

Part number: M27/207-(dash number from table I.)

TABLE I Electrical rating and physical characteristics.

Dash no	Inductance µH min (1-2)	Voltage rms (1-2)	Frequency Hz (1-2)	Current Amps (rms) (1-2)	DC resistance ohms (max)	Working voltage (1-2)	Power
01	400	1.0	400	1.6	0.5	115 V rms	1.6 VA
02	800	1 0	400	0.4	1.0	115 V rms	0.4 VA
03	300	1 0	400	2 0	0.5	115 V rms	2.0 VA

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities.
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity.
Army - ER

Agent:
DLA - ES

(Project 5950-0753-41)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.