

MILITARY SPECIFICATION SHEET


TRANSFORMERS AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE),
INDUCTOR, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the inductor described herein shall consist of this specification and the latest issue of MIL-T-27.

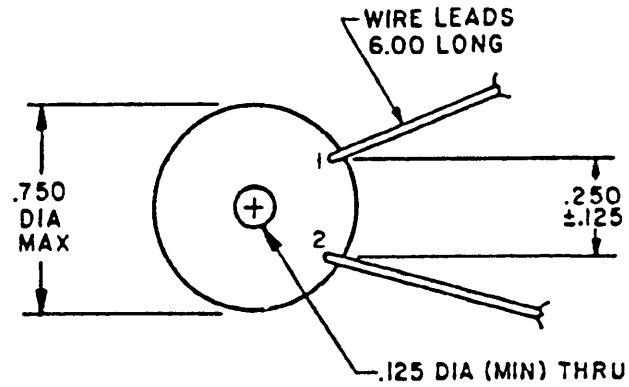

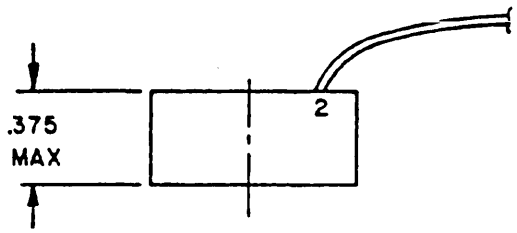



Inches	mm
.125	3.18
.250	6.35
.375	9.52
.750	19.05
6.00	152.4

Working voltage - 100 V
Altitude - 70,000 ft
CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration.

(A) Denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance: 50 µH ±10 percent.

Current: 2 amperes maximum.

Voltage: 10 volts rms.

Frequency: 1,000 Hz.

DC resistance: .25 ohm maximum.

(A) Power: 20 watts.

Working voltage: 100 volts.

Design and construction:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Material: Epoxy.

(A) Terminals: Solid copper 6 inches long. No. 24 AWG, class 180 type H2, in accordance with J-W-1177.

Weight: .07 pound.

Operating temperature range: -55°C to +130°C.

(A) Altitude: 70,000 feet maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 500 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

Inductance: With 10 volts, 1,000 Hz across (1-2), and 2 amperes dc applied to (1-2), the inductance shall be 50 µH ±10 percent.

DC resistance: 0.25 ohm maximum.

Temperature rise: +25°C with 10 volts rms, 1,000 Hz 2.0 amperes dc applied to (1-2) at an ambient temperature of +105°C maximum.

Marking location: See figure 1.

Part number: M27/208-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0718)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:51Z
Check the source to verify that this is the current version before use.