INCH-POUND

MIL-T-27/211B
20 April 1993
SUPERSEDING
MIL-T-27/211A
8 May 1986


MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, 15 VA, TF5T03ZZ


(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

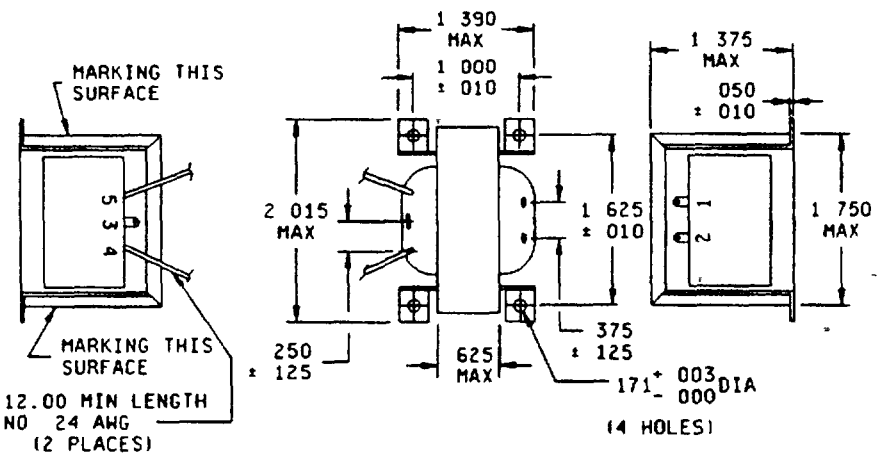

Inches	mm	Inches	mm
003	0 08	1 000	25 40
.010	0.25	1.375	34 92
050	1.27	1 390	35 31
125	3.18	1 625	41.28
171	4.34	1 750	44.45
.250	6.35	2 015	51 18
.375	9 52	12.000	304 80
625	15 88		



WORKING VOLTAGE 250 V (EACH WINDING)
ALATITUDE 70,000 FEET MAX

CIRCUIT DIAGRAM AND MARKING

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for information only
3 Marking shall be on the sides of the case

FIGURE 1 Dimensions and configurations

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary (1-2) 15 voltamperes, 250 volts rms, 400 Hz

Secondary (4-5) 30 volts rms, 0 5 ampere rms

Working voltage (1-2) 250 volts rms, (4-5) 250 volts rms

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Terminals (3) solder lugs (copper, tin-plated), and (2) insulated wire leads (No 24 AWG, type E in accordance with MIL-W-16878)

Height Lugs (375 inch (9 53 mm) maximum), leads (12 inches (304 8 mm) minimum length)

Weight 5 ounces maximum

Operating temperature range. -55°C to +170°C

Altitude 70,000 feet maximum

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage (each winding)

At sea level 1,000 volts rms
At reduced barometric pressure 312.5 volts rms

Electrical characteristics

No load. With 250 volts rms and 400 Hz in (1-2), and current in (1-2) at 15 milliamperes rms maximum, power in (1-2) shall not exceed 075 watt maximum Also, voltage across (4-5) shall be 30 volts rms ±10 percent

Rated load With 250 volts rms and 400 Hz (1-2) and 0.5 ampere rms in (4-5), voltage across (4-5) shall be 30 volts rms +10 percent, -20 percent.

DC resistance

(1-2) 110 ohms ±20 percent
(4-5). 1 5 ohms ±20 percent

Electrostatic shielding Voltage ratio 5 to 1 at 400 Hz

Polarity Additive, with terminals 2 and 4 connected.

Temperature rise 75°C with 250 volts rms, 400 Hz across (1-2) at an ambient temperature of 95°C, full load on (4-5)

Vibration, high frequency MIL-STD-202, method 204, test condition D

Salt spray (corrosion) MIL STD 202 method 101, test condition B

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:52Z
Check the source to verify that this is the current version before use.

(8) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Part or Identifying Number (PIN) M27/211-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:52Z
Check the source to verify that this is the current version before use.