
MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEP-DOWN, TF5T03ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

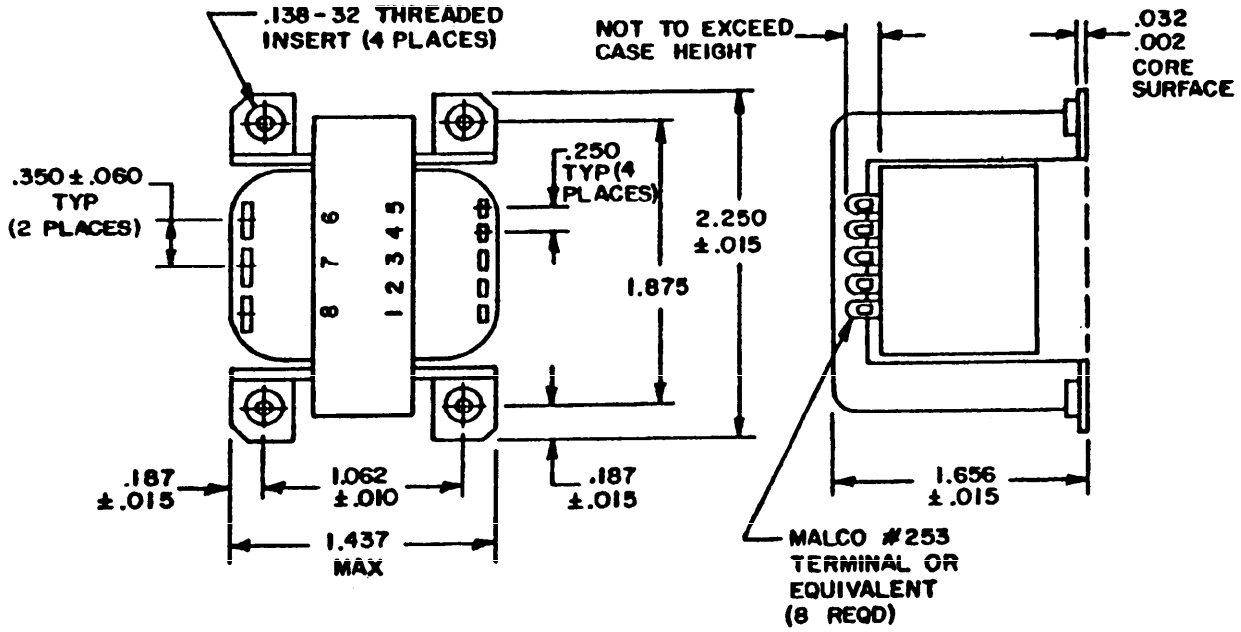

Inches	mm
.002	0.05
.010	0.25
.015	0.38
.032	0.81
.060	1.52
.138	3.51
.187	4.75
.250	6.35
.350	8.89
1.062	26.97
1.437	36.50
1.656	42.06
1.875	47.62
2.250	57.15

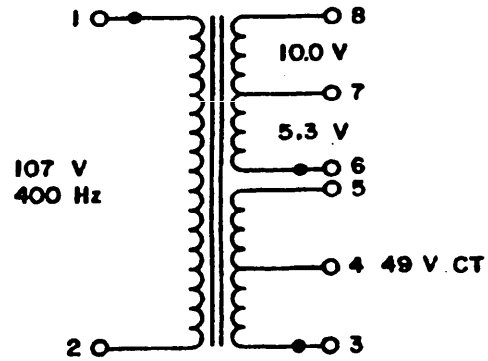

WORKING VOLTAGE: 120 Vrms
ALTITUDE: 70 k FT MAX

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on side of case.

FIGURE 1. Dimensions and configuration.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: STANDARDS.daps.dla.mil - Downloaded: 2022-10-17T03:38Z
Check the source to verify that this is the current version before use.

Deputy Inspector General

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage (1-2): 107 volts rms, 400 hertz ±20.

Primary current (1-2): 0.35 ampere.

Voltampere rating: 37 voltamperes.

Secondary voltage:
(3-5): 49 volts ct.
(6-7): 5.3 volts.
(7-8): 10.0 volts.

Secondary current:
(3-5): 0.010 ampere.
(6-7): 1.63 amperes.
(7-8): 0.60 ampere.

Working voltage: 120 volts rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Terminals: Solder terminal, Malco No. 253 or equivalent.

Terminal height: Not to exceed case height.

Altitude: 70,000 feet maximum.

Weight: 7.5 ounces maximum.

Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

No load: With 107 volts rms, 400 hertz across (1-2), the current in (1-2) shall not exceed 150 milliamperes and the power in (1-2) shall not exceed 18 watts.

Voltage across:
(3-5): 49 volts ±10 percent.
(6-7): 5.3 volts ±10 percent.
(7-8): 10.0 volts ±10 percent.

Rated load: With 107 volts rms, 400 hertz across (1-2), the voltage across:
(3-5): 49 volts ct ±10 percent.
(6-7): 5.3 volts ±10 percent.
(7-8): 10.0 volts ±10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:53Z
Check the source to verify that this is the current version before use.

Ⓐ DC resistance:
(1-2): 7.5 ohms, maximum.
(3-5): 2.5 ohms, maximum.
(6-7): 0.186 ohm, maximum.
(7-8): 0.146 ohm, maximum.

Polarity: Additive, with 2 and 3, and 5 and 6 connected.

Temperature rise: 99°C with 107 volts rms, 400 hertz across (1-2) at an ambient temperature of 71°C.

Marking location: See figure 1.

Part number: M27/221-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0693-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:53Z
Check the source to verify that this is the current version before use.