INCH-POUND

MIL-T-27/223B
30 June 1992
SUPERSEDING
MIL-T-27/223A
7 October 1987


MILITARY SPECIFICATION SHEET

TRANSFORMERS, POWER, STEP-DOWN, TF5T0322

(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

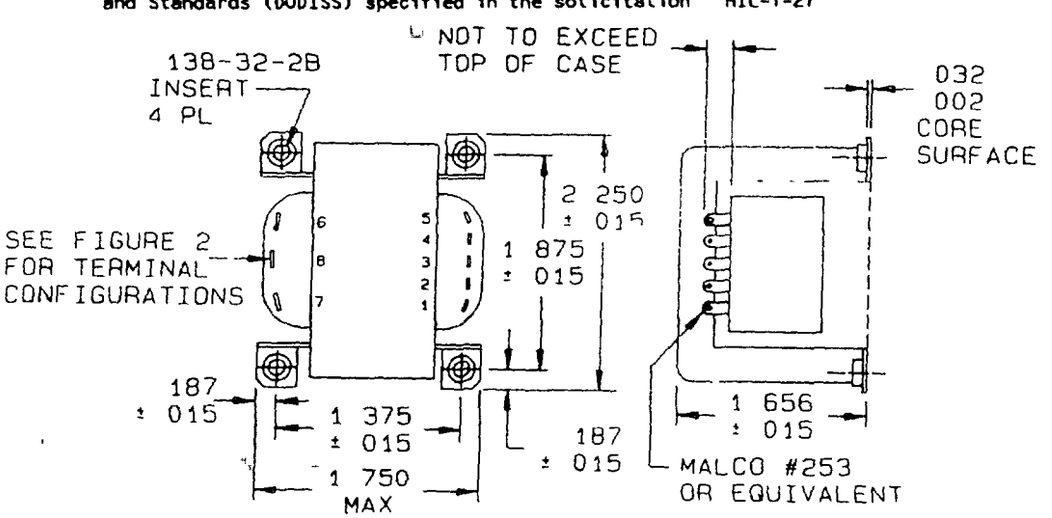

Inches	mm
002	0 05
015	0 38
032	0 81
138	3 51
187	4 75
1 375	34 92
1 656	42 06
1 750	44 45
1 875	47 62
2 250	57 15


NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 The number of terminals and the configuration of the terminals shall be as shown on figure 2
4 For circuit diagram and marking, see figure 3
5 Marking shall be on side of case

FIGURE 1 Dimensions and configuration

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

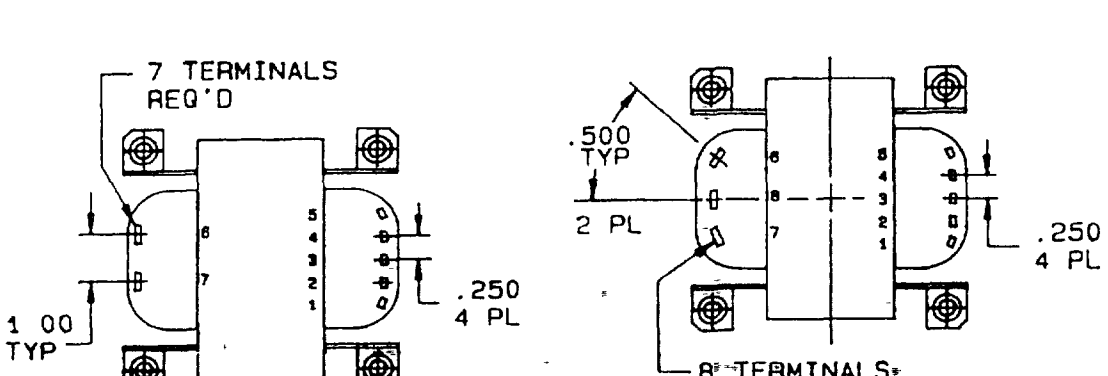


DASH NUMBER 01

DASH NUMBER 02

Inches	mm
250	6 35
500	12 70
1 000	25 40

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only

FIGURE 2 Terminal configuration

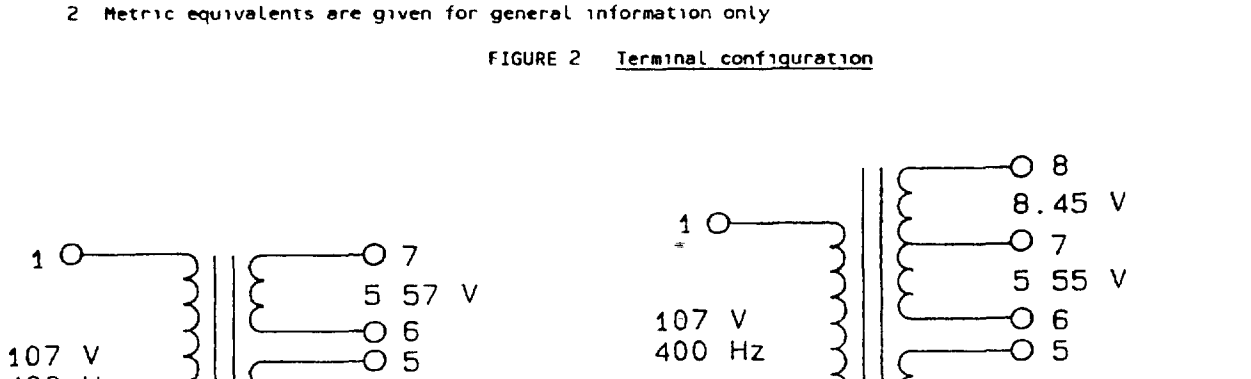

DASH NUMBER 01

DASH NUMBER 02

NOTE Working voltage = 120 V rms, altitude = 70,000 feet maximum

FIGURE 3 Circuit diagram and marking

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings See table I

Primary voltage (1-2) 107 V rms, 400 Hz ±20

Working voltage 120 V rms

Design and construction.

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Terminals Solder terminal Malco no 253 or equivalent

Terminal height Not to exceed top of case

Weight 11 8 ounces maximum

Altitude 70,000 feet maximum

Operating temperature range -55°C to +170°C

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage

At sea level 1,000 V rms

At reduced barometric pressure 300 V rms

Electrical characteristics

Rated load With 107 V rms, 400 Hz across (1-2), the secondary voltage shall be as specified (see table I)

Polarity Polarity shall be the same on terminals (see table II)

Temperature rise 99°C with 107 V rms, 400 Hz across (1-2) at an ambient temperature of 71°C

(B) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/223-(dash number from table I)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings

Dash no	Volt ampere rating (VA)	Voltage (V rms ±10%)			Current (A)			
		(3-5)	(6-7)	(7-8)	(1-2)	(3-5)	(6-7)	(7-8)
01	125	49 CT	5 57	---	1 20	0 010	22 5	---
02	130	49 CT	5 55	8 45	1 25	0 010	16 4	2 86

TABLE II Electrical characteristics

Dash no	No load With 107 V rms, 400 Hz in (1-2)					DC resistance (Ω max)				Polarity
	Current mA, (max) (1-2)	Power W (max) (1-2)	Voltage ±10% (3-5)	Voltage ±10% (6-7)	Voltage ±10% (7-8)	(1-2)	(3-5)	(6-7)	(7-8)	
01	350	42	49 CT	5 57	---	1 93	20 0	007	---	1, 3, 6
02	350	42	49 CT	5 55	8 45	1 93	20 0	0 14	0 1	1, 3, 6

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0804)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.