
MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEP-DOWN, TF5TO3ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the transformer described herein shall consist of this specification and the latest issue of MIL-T-27.

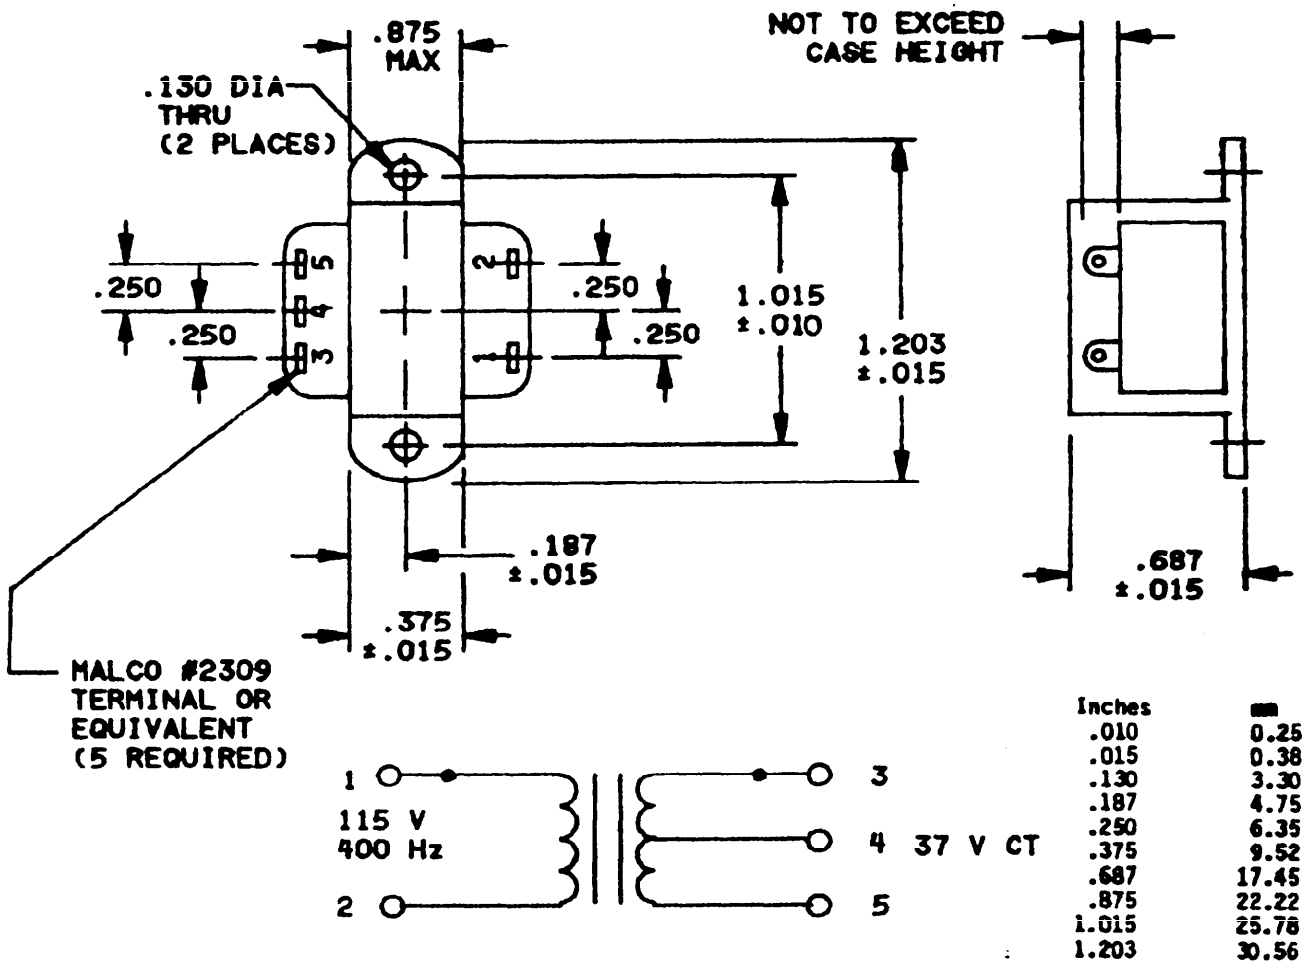

Inches	mm
.010	0.25
.015	0.38
.130	3.30
.187	4.75
.250	6.35
.375	9.52
.687	17.45
.875	22.22
1.015	25.78
1.203	30.56

WORKING VOLTAGE: 120 V RMS
ALTITUDE: 70 K FT MAX

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on side of case.

FIGURE 1. Dimensions and configuration.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Primary voltage (1-2): 115 volts rms, 400 hertz ±20.

(A) Primary current (1-2): 0.05 ampere.

(A) Voltampere rating: 6.0 voltamperes.

Secondary voltage: (3-5): 37 volts ct.

Secondary current: (3-5): 0.015 ampere.

Working voltage: 120 volts rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Terminals: Solder terminal, Malco No. 2309 or equivalent.

Terminal height: Not to exceed case height.

Altitude: 70,000 feet maximum.

Weight: 0.053 pound maximum.

Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.

At reduced barometric pressure: 300 volts rms.

Electrical characteristics:

No load: With 115 volts rms, 400 hertz across (1-2), the current in (1-2) shall not exceed 0.25 milliampere and the power in (1-2) shall not exceed 3 watts.

Voltage across: (3-5): 37 volts ±10 percent.

Rated load: With 115 volts rms, 400 hertz across (1-2), the voltage across (3-5) shall be 37 volts ct ±10 percent.

DC resistance:
(1-2): 390 ohms, maximum.
(3-5): 200 ohms, maximum.

Polarity: Additive, with 2 and 3 connected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

Temperature rise: 99°C with 115 volts rms, 400 hertz across (1-2) at an ambient temperature of 71°C.

Marking location: See figure 1.

Part number: M27/225-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0693-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.