INCH-POUND

MIL-T-27/225C
20 April 1993
SUPERSEDING
MIL-T-27/225B
14 June 1988


MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEP-DOWN, TF5T032Z

(C) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

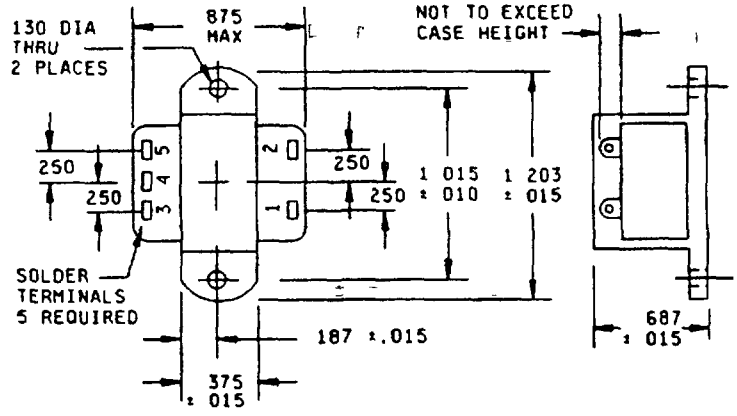

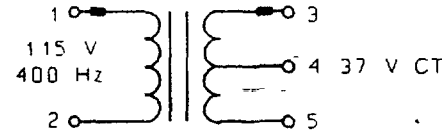

WORKING VOLTAGE 120 Vrms
ALTITUDE 70k FT, MAX

CIRCUIT DIAGRAM AND MARKING

Inches	mm
010	0 25
.015	0.38
.130	3.30
.187	4.75
250	6.35
375	9.52
.687	17 45
.875	22.22
1.015	25.78
1 203	30.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only
3. Marking shall be on side of the case.

FIGURE 1 Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Primary voltage (1-2) 115 volts rms, 400 Hz ±20

Primary current (1-2) 0 05 ampere

Voltampere rating 6 0 voltamperes

Secondary voltage (3-5) 37 volts ct

Secondary current (3-5) 0 015 ampere

Working voltage 120 volts rms

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Terminals Solder terminal, Day Star no 001-0110-000, or equivalent

Terminal height Not to exceed case height

Weight 0 053 pound maximum

Altitude 70,000 feet maximum

Operating temperature range -55°C to +170°C

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Dielectric withstanding voltage

At sea level 1,000 volts rms
At barometric pressure 300 volts rms

Electrical characteristics

No load With 115 volts rms, 400 Hz across (1-2), the current in (1-2) shall not exceed 0 25 milliampere and the power in (1-2) shall not exceed 3 watts

Voltage across (3-5) 37 volts ±10 percent

Rated load With 115 volts rms, 400 Hz across (1-2), the voltage across (3-5) shall be 37 volts center tap ±10 percent

DC resistance

(1-2) 390 ohms, maximum
(3-5) 200 ohms, maximum

Polarity Additive, with terminals 2 and 3 connected

Temperature rise 99°C with 115 volts rms, 400 Hz across (1-2) at an ambient temperature of 71°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

(C) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN): M27/225-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.