INCH-POUND

MIL-T-27/225C
20 April 1993
SUPERSEDING
MIL-T-27/225B
14 June 1988


MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEP-DOWN, TF5T03Z2

(C) Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

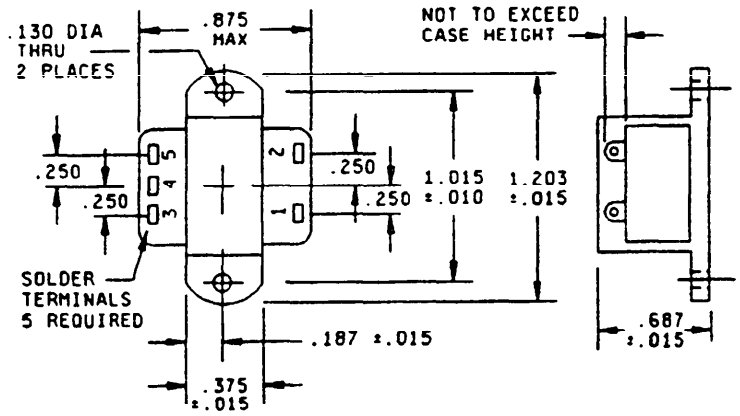

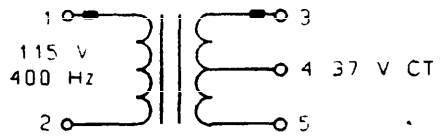

WORKING VOLTAGE 120 Vrms
ALTITUDE 70k FT. MAX

CIRCUIT DIAGRAM AND MARKING

Inches	mm
.010	0.25
.015	0.38
.130	3.30
.187	4.75
.250	6.35
.375	9.52
.687	17.45
.875	22.22
1.015	25.78
1.203	30.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Marking shall be on side of the case.

FIGURE 1. Dimensions and configurations.

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1 2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Primary voltage (1-2): 115 volts rms, 400 Hz ±20.

Primary current (1-2): 0.05 ampere.

Voltampere rating: 6.0 voltamperes.

Secondary voltage (3-5): 37 volts ct.

Secondary current (3-5): 0.015 ampere.

Working voltage: 120 volts rms.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Terminals: Solder terminal, Day Star no. 001-0110-000, or equivalent.

Terminal height: Not to exceed case height.

Weight: 0.053 pound maximum.

Altitude: 70,000 feet maximum.

Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage:

At sea level: 1,000 volts rms.
At barometric pressure: 300 volts rms.

Electrical characteristics:

No load: With 115 volts rms, 400 Hz across (1-2), the current in (1-2) shall not exceed 0.25 milliampere and the power in (1-2) shall not exceed 3 watts.

Voltage across (3-5): 37 volts ±10 percent.

Rated load: With 115 volts rms, 400 Hz across (1-2), the voltage across (3-5) shall be 37 volts center tap ±10 percent.

DC resistance:

(1-2): 390 ohms, maximum.
(3-5): 200 ohms, maximum.

Polarity: Additive, with terminals 2 and 3 connected.

Temperature rise: 99°C with 115 volts rms, 400 Hz across (1-2) at an ambient temperature of 71°C.

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:54Z
Check the source to verify that this is the current version before use.

c. Quality assurance provisions:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/225-01.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0815-27)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.