
MILITARY SPECIFICATION SHEET


TRANSFORMER, POWER, STEP-DOWN, TF5TO3ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

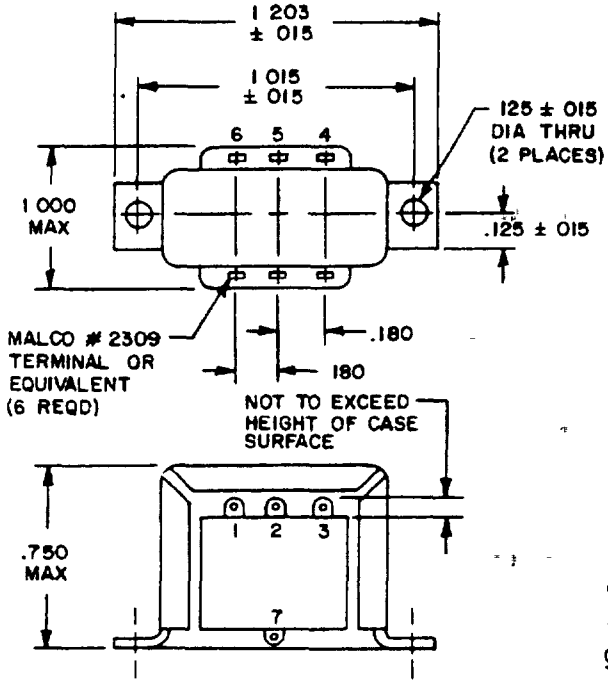

INCHES	MM
015	38
125	3 18
180	4 57
.750	19 05
1 000	25 40
1.015	25 78
1 203	30 56



WORKING VOLTAGE 115 Vrms
ALTITUDE 70 k FT MAX

CIRCUIT DIAGRAM AND MARKING

NOTES:
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Marking shall be on side of case

FIGURE 1 Dimensions and configuration

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings
- Primary voltage (1-2): 115 volts rms, 400 hertz ±20.
- Primary current (1-2): 0.02 ampere.
- Volt-ampere rating: 1.9 volt-amperes.
- Secondary voltage
  - (3-4): 13.1 volts rms
  - (5-6): 11.7 volts rms.
- Secondary current
  - (3-4): 0.1 ampere.
  - (5-6): 0.050 ampere.
- Working voltage: 115 volts rms.

Design and construction
- Dimensions and configuration: See figure 1.
- Duty cycle: Continuous.
- Case: Encapsulated.
- Terminals: Solder terminal, Malco No. 2309 or equivalent.
  - Terminal height: Not to exceed height of case surface.
- Altitude: 70,000 feet, maximum.
- Weight: 0.8 ounces, maximum.
- Operating temperature range: -55°C to +170°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage
- At sea level: 1,500 volts rms.
- At reduced barometric pressure: 300 volts rms.

Electrical characteristics
- No load: With 115 volts rms, 400 hertz across (1-2), the current in (1-2) shall not exceed 4 milliamperes and the power in (1-2) shall not exceed 4-7 watts.
  - Voltage across (3-4): 13.1 volts rms ±10 percent.
  - Voltage across (5-6): 11.7 volts rms ±10 percent.
- Rated load: With 115 volts ac, 400 hertz across (1-2),
  - Voltage across (3-4): 13.1 volts rms ±10 percent.
  - Voltage across (5-6): 11.7 volts rms ±10 percent.
- DC resistance
  - (1-2): 370 ohms, maximum.
  - (3-4): 7.88 ohms, maximum.
  - (5-6): 8.08 ohms, maximum.
- Polarity: Additive with 2 and 3, and 4 and 5 connected.

Temperature rise: 99°C with 115 volts rms, 400 hertz across (1-2) at an ambient temperature of 71°C

Marking location: See figure 1.

Part number: M27/227-01.

Custodians
- Army - EL
- Navy - EC
- Air Force - 85

Review activities
- Army - MI
- Navy - SH, OS
- Air Force - 11, 17, 99
- DLA - ES

User activities
- Army - AR, WC, ME
- Navy - MC, AS
- Air Force - 19

Preparing activity:
- Army - EL

Agent
- DLA - ES

(Project 5950-0555-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-27/227 TRANSFORMER, POWER, STEP-DOWN, TE5T0377

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Elec Command
ATTN: DRSEL-RD-TS
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:54Z
Check the source to verify that this is the current version before use.