MIL-A-82451(OS)
Amendment 2
3 July 1969
Superseding
Amendment 1
24 October 1966

MILITARY SPECIFICATION

ACTUATOR ASSEMBLY TEST SET

(For Torpedo Mk 46 Mod 1)

This amendment forms a part of Military Specification MIL-A-82451(OS) dated 10 May 1966 and has been approved by the Naval Ordnance Systems Command, Department of the Navy

Wherever it appears in specification, delete "Bureau of Naval Weapons" and substitute "Naval Ordnance Systems Command"; also delete "BuWeps" and substitute "NAVORD".

Page 2, under "PUBLICATIONS": In nomenclature opposite WD 28936 delete "Test Set DL 2540220" and substitute "Test Set DL 2540260".

Page 2, Table I, under "Voltage": Add after (vac) "60 cps nominal".

Page 3, paragraph 3.2.2, line 3: Delete "10 millivolts" and substitute "50 millivolts".

Page 7, Table III, first item and identification. Delete and substitute:

"Oscilloscope: (DC to 300 kc/s passband; 0.18 microseconds rise time, 20 mv/cm deflection factor with preamplifier, 6 cm by 10 cm display graticule)	Tektronix, Model 531A with Type D plug-in preamplifier"

Page 7, Table III, second item and identification. Delete and substitute:

"Digital voltmeter: (Range: 0.001 to 999.9 vdc; Accuracy: ±0.05% of reading ± 1 digit)	Hewlett-Packard Model 3440A with 3442A Automatic Range Selector"

Page 7, Table III, line 18, Item column. Delete and substitute: "Resistor, 100 ohms, 25 watt, 1%."

FSC 1355

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:10Z
Check the source to verify that this is the current version before use.

Page 8, paragraph 4.5.3.1.6: Add "Set RANGE selector switch on digital voltmeter to AUTO."

Page 8, paragraphs 4.5.3.1.7, 4.5.3.1.9, 4.5.3.1.10, 4.5.3.1.11, and 4.5.3.1.12: Delete "digital DC voltmeter" and substitute "digital voltmeter" in nine places.

Page 8, paragraph 4.5.3.1.14, lines 3 and 4: Delete "100-ohm, 50-watt resistor" in two places and substitute "100-ohm, 25-watt resistor".

Page 8, paragraph 4.5.3.1.17: Delete "digital DC voltmeter" and substitute "digital voltmeter".

Page 9, paragraph 4.5.3.1.18: Delete "digital DC voltmeter" and substitute "digital voltmeter".

Page 9, paragraph 4.5.3.1.20: Delete "100-ohm, 50-watt resistor" and substitute "100-ohm, 25-watt resistor".

Page 9, paragraph 4.5.3.2.1. Delete lines 1, 2, 5, and 7 of oscilloscope controls and substitute the following:

"TRIGGER MODE	AC
TRIGGER SLOPE	EXT (+)
TIME/CM	0.1 SEC
HORIZONTAL DISPLAY	A"

Page 10, paragraph 4.5.3.2.2: Delete last sentence.

Page 10, paragraph 4.5.3.2.6: Delete last sentence.

Page 11, Figure 1: Replace with new Figure 1 attached.

Page 13, paragraph 6.1.1: Delete "DL 2540014" and substitute "DL 2540065".

APPENDIX, page (3), paragraph 30.2.1: Delete "Digital DC voltmeter" and substitute "Digital Voltmeter" in four places.

APPENDIX, page (4), paragraph 30.2.1 (Continued): Delete "Digital DC Voltmeter" and substitute "Digital Voltmeter" in two places.

Preparing Activity
Navy - OS
Project No. 1355-N061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:10Z
Check the source to verify that this is the current version before use.

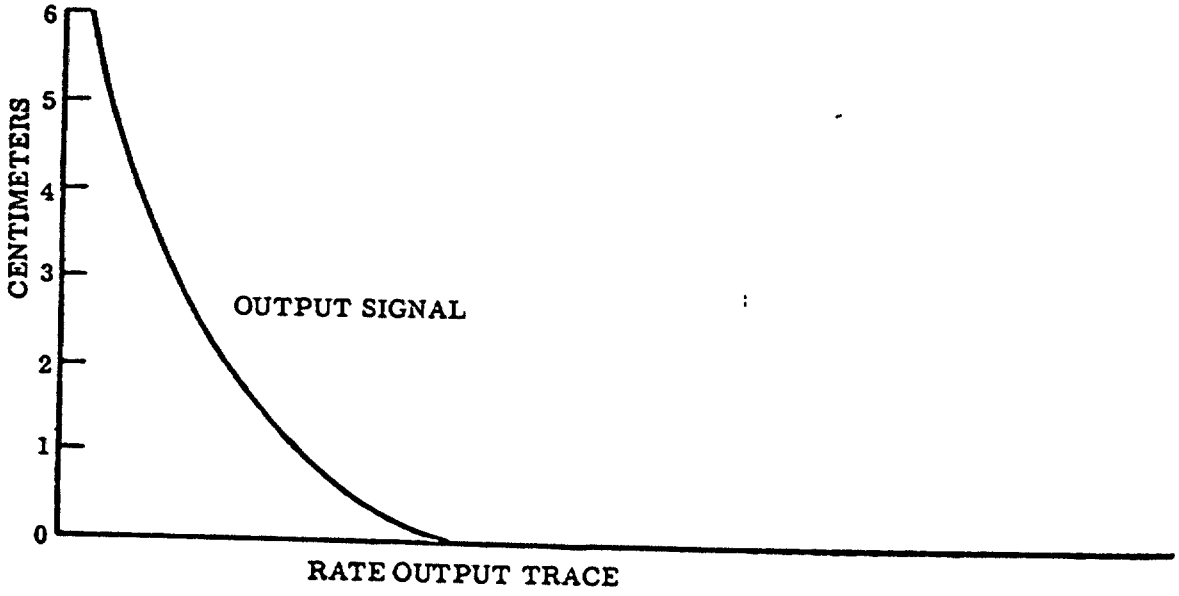


Figure 1. Rate Output

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:10Z
Check the source to verify that this is the current version before use.