
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, 17, 29, 33, 41, 53, AND 65 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS, 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use within the US Army Communications - Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

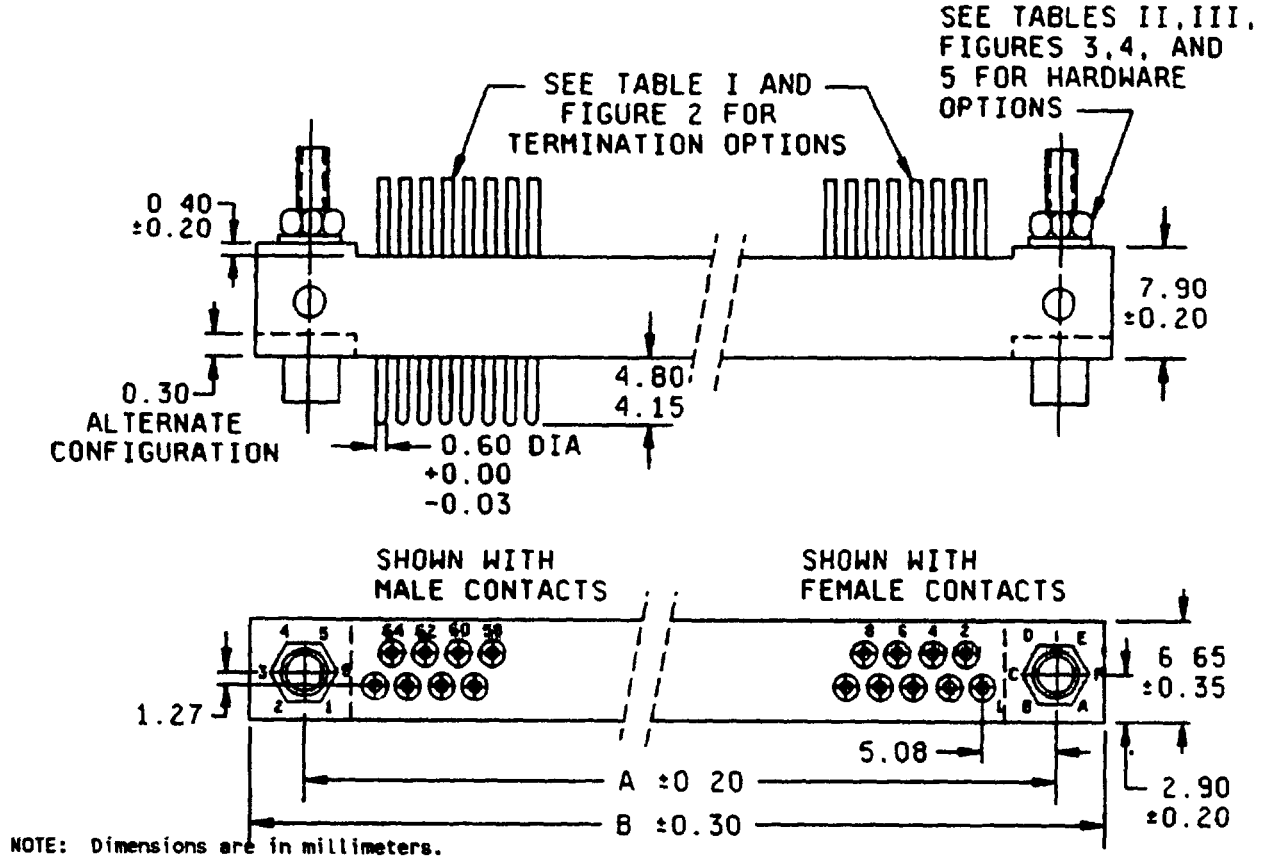

NOTE: Dimensions are in millimeters.

FIGURE 1. Connector receptacle.

TABLE I. Number of contacts.


Number of contacts	Dimension (in millimeters)	
	A	B
17	30.50	38.50
29	45.70	53.70
33	50.80	58.80
41	60.90	68.90
53	76.20	84.20
65	91.40	99.40

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLE TERMINAL STYLES


REF	MALE CONTACTS	REF	FEMALE CONTACTS
C	RIGHT ANGLE DIP SOLDER	E	RIGHT ANGLE DIP SOLDER
B	RIGHT ANGLE DIP SOLDER	F	RIGHT ANGLE DIP SOLDER
G	RIGHT ANGLE DIP SOLDER	J	RIGHT ANGLE DIP SOLDER
P	RIGHT ANGLE DIP SOLDER	Q	RIGHT ANGLE DIP SOLDER

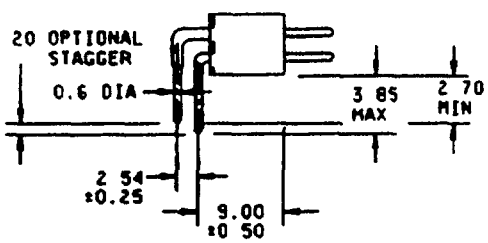



2.4 (094 IN.) P.C. BOARD

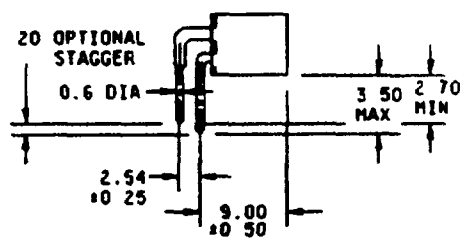


2 4 (.094 IN) P.C BOARD

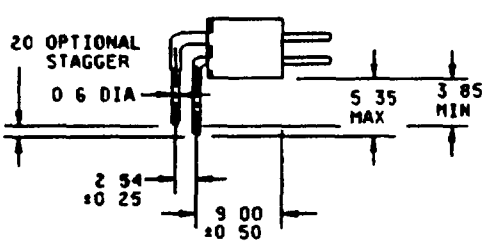

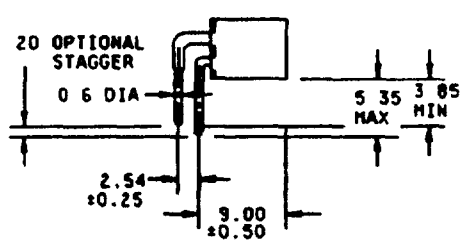


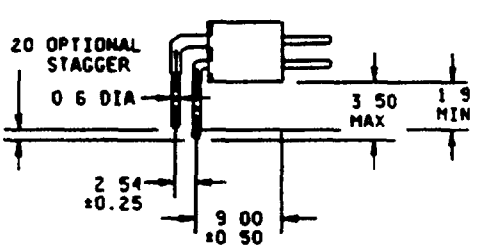


1 6 (064 IN) P.C BOARD

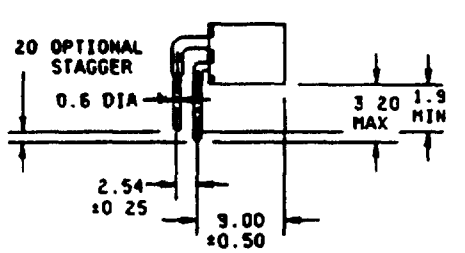

1 6 (.064 IN.) P C BOARD

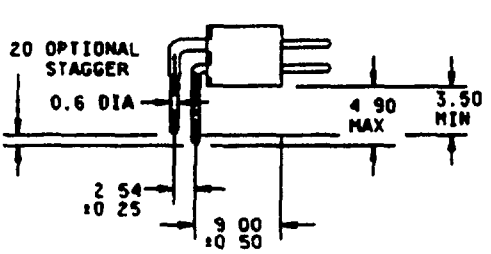

3 2 (125 IN) P.C BOARD

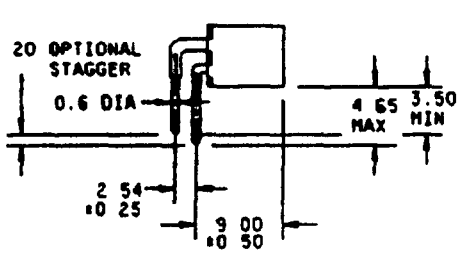

3.2 (125 IN) P C BOARD

FIGURE 2. Connector termination styles

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLE TERMINAL STYLES









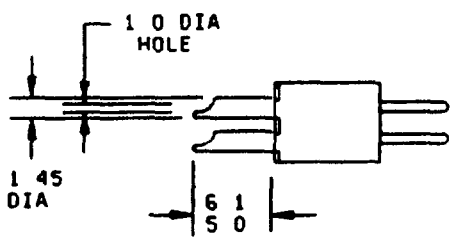
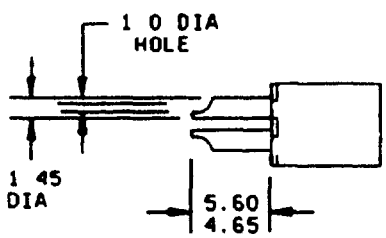
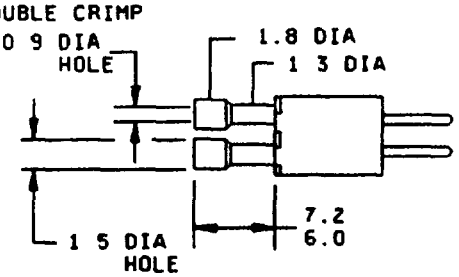
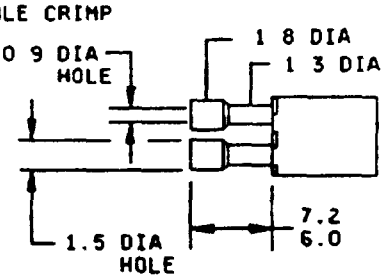
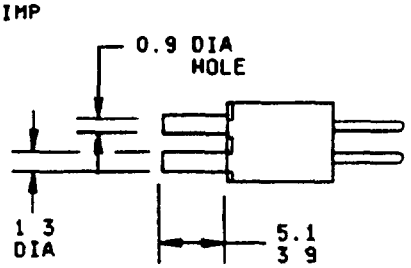


REF	MALE CONTACTS	REF	FEMALE CONTACTS
A	STRAIGHT DIP SOLDER 	D	STRAIGHT DIP SOLDER 
T	STRAIGHT DIP SOLDER  1.6 (064 IN.) P.C. BOARD	U	STRAIGHT DIP SOLDER  1.6 (.064 IN.) P.C. BOARD
N	STRAIGHT DIP SOLDER  2.4 (094 IN.) P C. BOARD	Z	STRAIGHT DIP SOLDER  2.4 (.094 IN.) P.C. BOARD
V	STRAIGHT DIP SOLDER  3 2 (125 IN) P C. BOARD	W	STRAIGHT DIP SOLDER  3.2 (125 IN.) P.C BOARD

FIGURE 2 Connector termination styles - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLE TERMINAL STYLES


REF	MALE CONTACTS	REF	FEMALE CONTACTS
S	SOLDER CUP  FOR UP TO 22 AWG	L	SOLDER CUP  FOR UP TO 22 AWG.
M	DOUBLE CRIMP  FOR 22,24 AND 26 AWG	H	DOUBLE CRIMP  FOR 22,24 AND 26 AWG.
R	CRIMP  FOR 22,24 AND 26 AWG	K	CRIMP  FOR 22,24 AND 26 AWG
		Y	WRAP POST 

NOTE. Dimensions are in millimeters

FIGURE 2 Connector termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLE MOUNTING STYLES

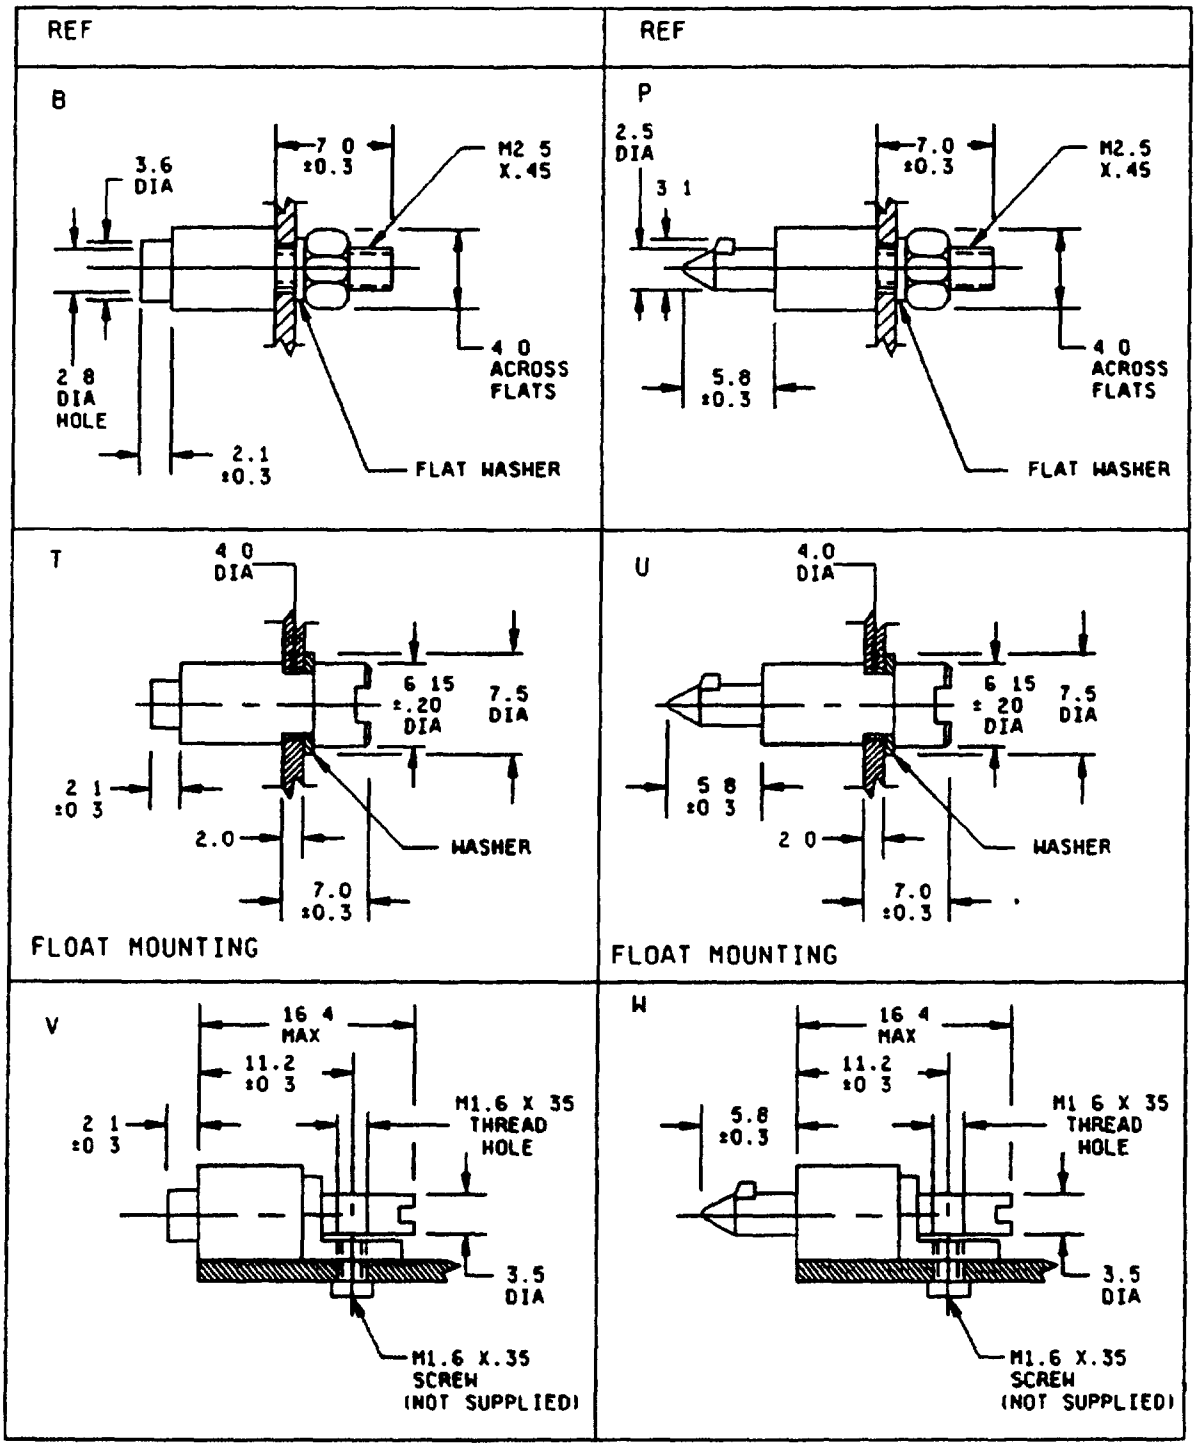

NOTE: Dimensions are in millimeters.

FIGURE 3 Mounting styles

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

RECEPTACLE LOCKING HARDWARE

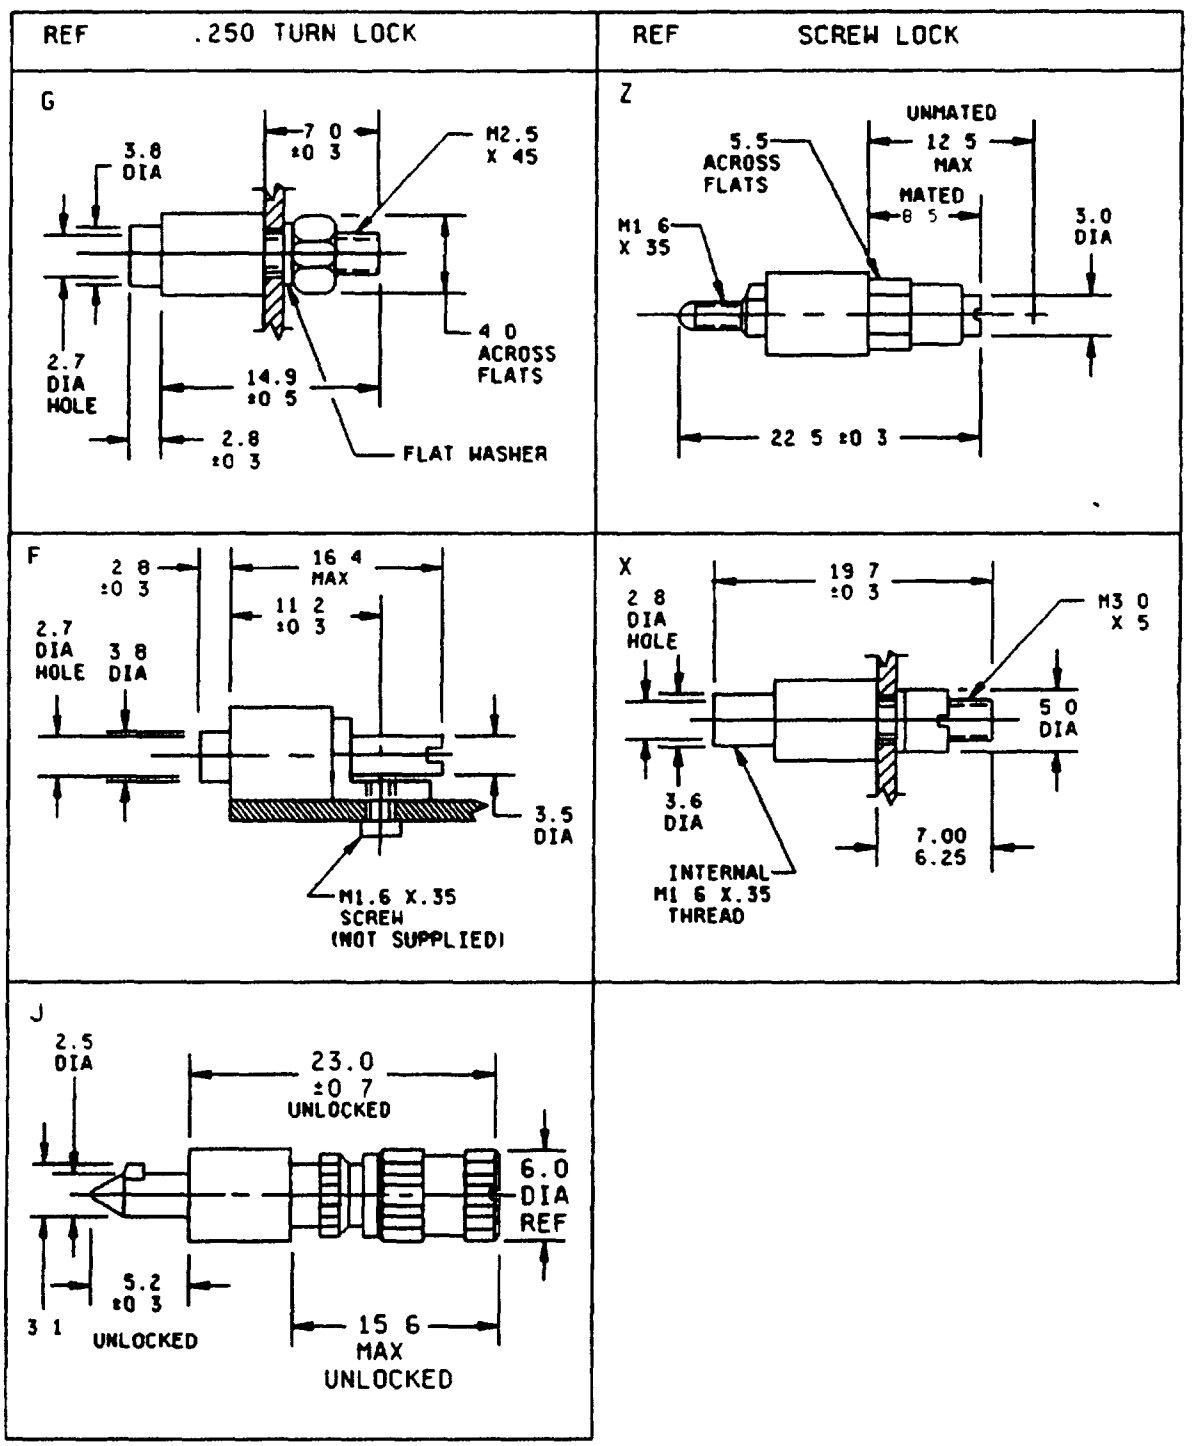


FIGURE 4. Locking hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in millimeters
2 This is a metric design
3 Unless otherwise specified, tolerance is ±0.10 millimeter.
4 These connectors mate with MIL-C-55302/162.
5 See table II for mating
6 Contact identification may be located adjacent to cavity on face or side and may be rotated 180°
7 Crimp contacts are shipped not inserted into insulator
8 Use crimp tool M22520/2-01 for R and K terminal styles with Daniels manufacturing positioner K547.
9 Use crimp tool M22520/2-01 for M and H terminal styles with Daniels manufacturing positioner K547 and K640

FIGURE 4 Locking hardware - Continued.

TABLE II. Mating references.

Type	Will only mate with (see note 4)	Locking method
B	P, U, W	None
F	J, K	Push 1\4 turn
G	J, K	Push 1\4 turn
J	F, G	Push 1\4 turn
P	B, T, V	None
T	P, U, W	None
U	B, T, V	None
V	P, U, W	None
W	B, T, V	None
X	Z	Screw
Z	X, Y	Screw

Source: https://assist.dla.mil -- Downloaded: 2026\10-22T22:53Z
Check the source to verify that this is the current version before use.

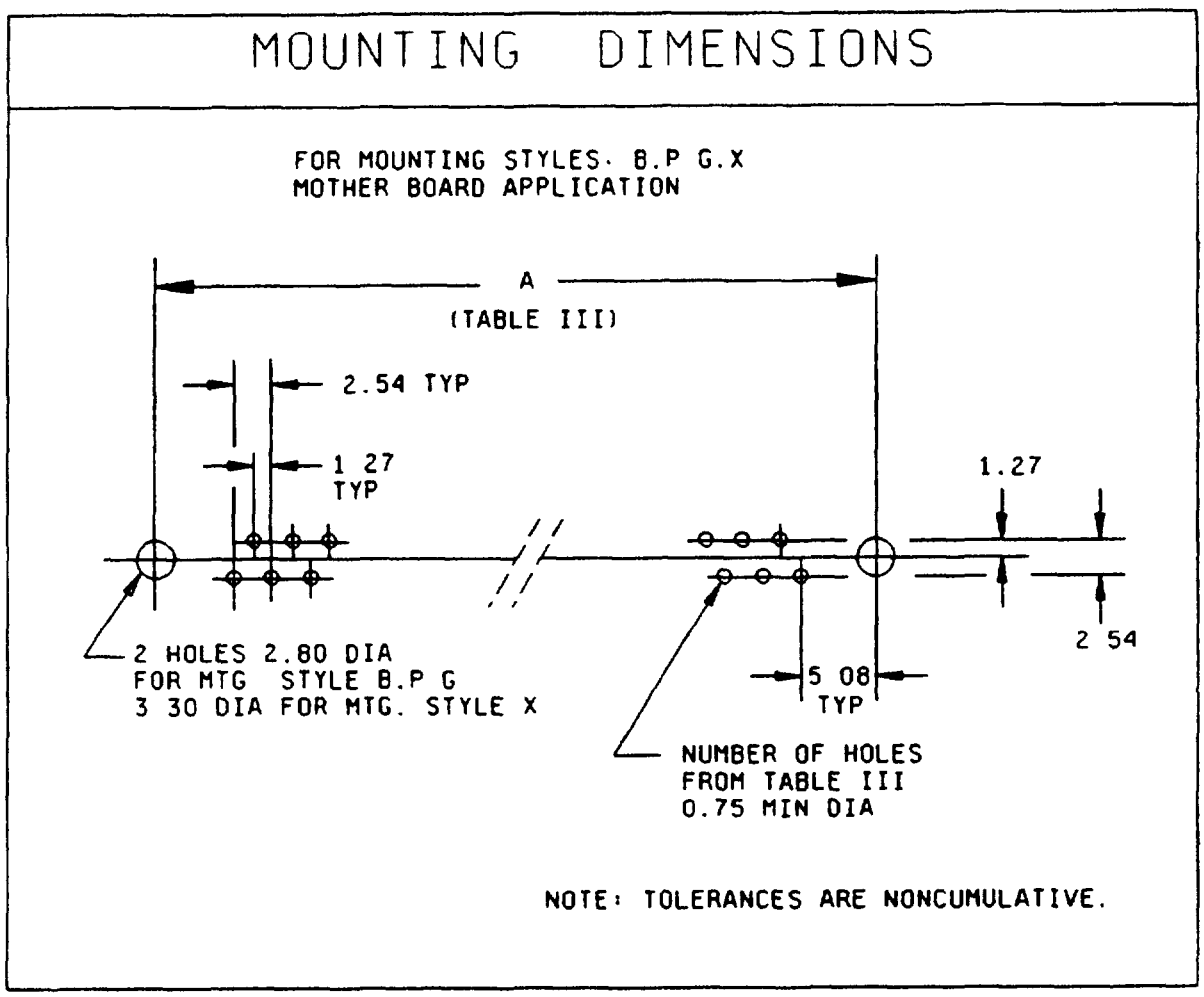


FIGURE 5. Mounting dimensions

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.


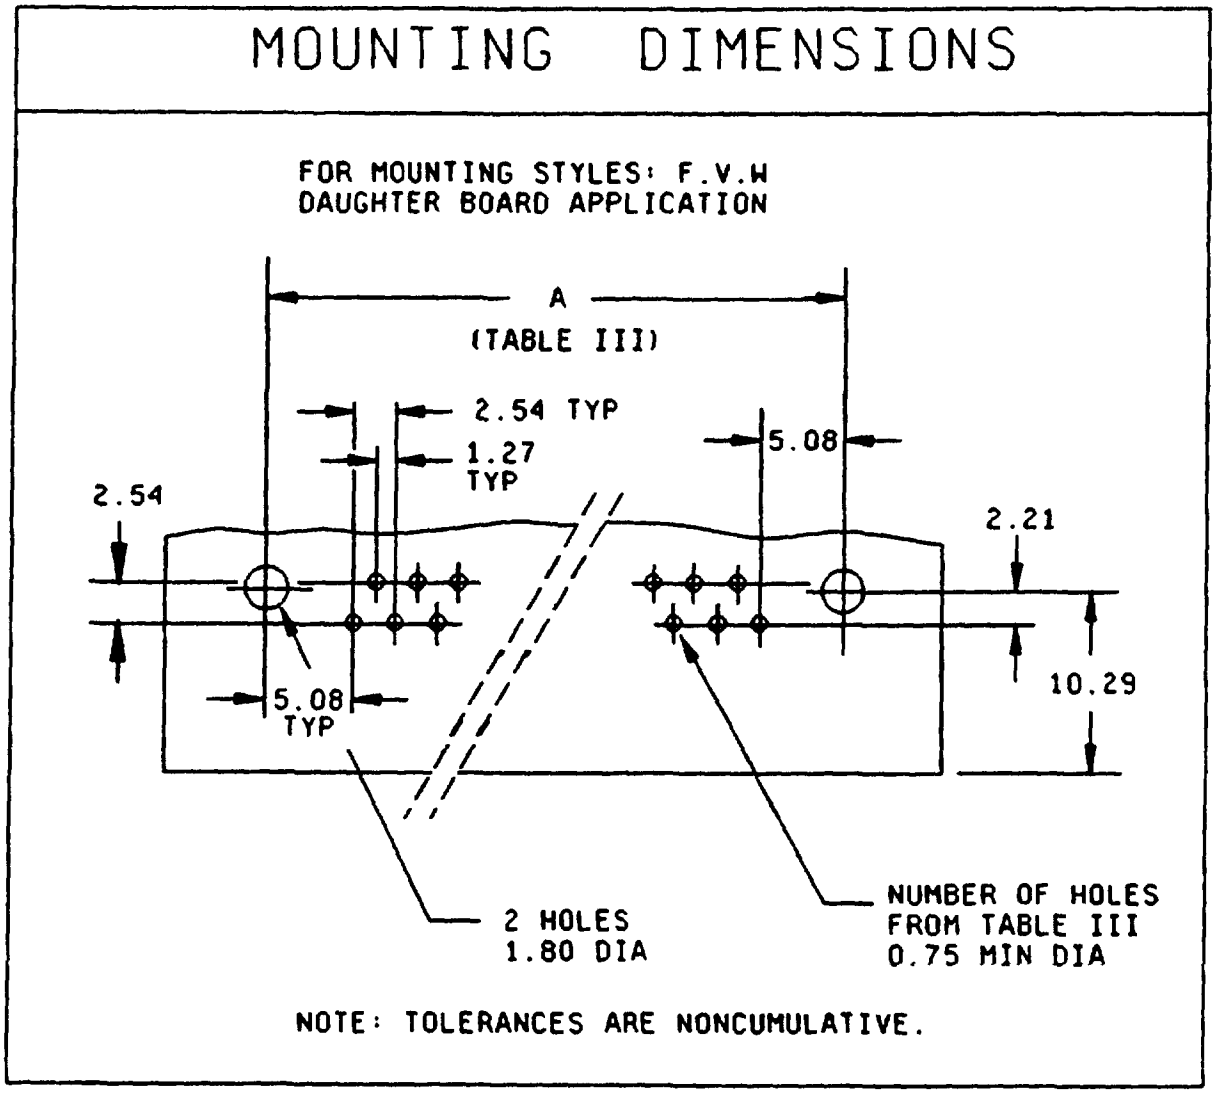


FIGURE 5. Mounting dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.


MOUNTING DIMENSIONS

PANEL CUTOUT FOR FIXED MOUNTING STYLES P,B,G X

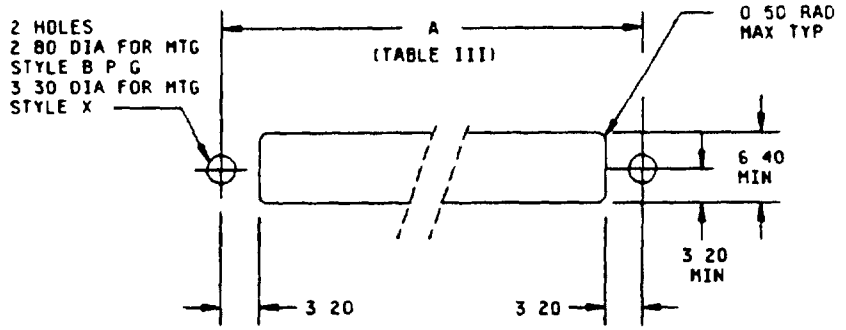

NOTE TOLERANCES ARE NONCUMULATIVE

PANEL CUTOUT FOR FLOAT MOUNTING STYLES T,U

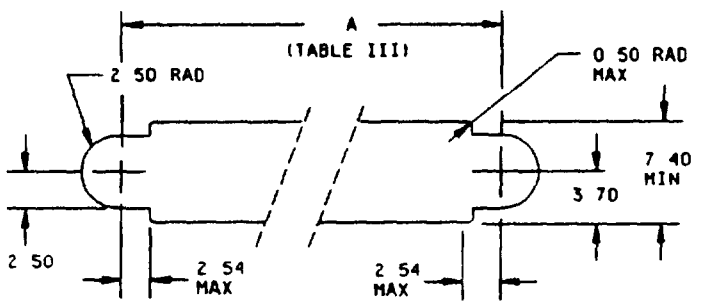

NOTE: TOLERANCES ARE NONCUMULATIVE

NOTE Dimensions are in millimeters.

FIGURE 5 Mounting dimensions - Continued

TABLE III. Mounting references

Number of contacts	A
17	30.50
29	45.70
33	50.80
41	60.90
53	76.20
65	91.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:

Dimensions and configuration: See figures 1 through 5.

Material

Insulators. Diallyl phthalate in accordance with MIL-M-14.

Guides and hardware: Brass in accordance with ASTM B36, B16, B124, B453, or B455; nickel plated in accordance with QQ-N-290 or AISI 300 series stainless steel or equivalent in accordance with QQ-S-763 or ASTM A582, passivated in accordance with QQ-P-35

Plating Plating in accordance with MIL-C-55302 or as noted below.

Mating surface (pin and wire): Gold in accordance with MIL-G-45204, class 1, type II, grade C over nickel in accordance with QQ-N-290, 30-150 microinches.

Terminations: Solderable areas (including crimp barrels and wire wrap terminations) shall be gold in accordance with MIL-G-45204, type III, grade A, 10 microinches minimum thickness or gold in accordance with MIL-G-45204 type II, grade C, class 00 over nickel in accordance with QQ-N-290, 30 to 150 microinches thick. Solderable areas must meet the requirements of MIL-STD-202, method 208

All other surfaces: Gold in accordance with MIL-G-45204, type II, grade C, 5 microinches minimum over nickel in accordance with QQ-N-290, 30-150 microinches.

Contact identification: See figure 1.

Contact separation forces:

Minimum force: 0.14 newton (0.50 ounce) with a 0.5800 millimeter (.0228 inch) +0.005, -0.00 diameter pin after being cycled 3 times.

Note: Steel pin test surface roughness to be 0.025 - 0.25 micron rms.

Unmating: The maximum force of a connector assembly shall not exceed 0.53 newton (1.90 ounces) multiplied by the number of contact positions.

Mating: The maximum force of a connector assembly shall not exceed 0.70 newton (2.5 ounces) multiplied by the number of contact positions.

Contact retention minimum Functional value 22.2 newtons (5 pounds); destructive test 35.3 newtons (8 pounds) maximum design and qualification value.

Contact rating: 5 amperes per line.

Durability: 2,000 cycles minimum.

Dielectric withstanding voltage:

Sea level: 1,400 V ac rms test.

High altitude 300 V ac rms test.

Keying: Rotation of guides; 6 positions each, 36 possible combinations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Connector Part or Identifying Number (PIN)

Example	D55302/	159	D	65	B

Specification number

Specification sheet number

Type of contact and termination (see figures 1 and 2)

Number of contacts (see table I)

Guide hardware number (see figures 3, 4, 5 and tables II and III)

Revision letters are not used due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodian.
Army - CR

Review activities:
Army - AR, AT, AV, ME, MI
DLA - ES

Preparing activity
Army - CR

Agent
DLA - ES

Project 5935-A418-01)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.