
MIL-F-8815/10B(AS)
4 April 1978
SUPERSEDING
MIL-F-8815/10A(AS)
14 October 1976

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, NONCLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 5 MICRON ABSOLUTE, F4 AIRCRAFT, 4.5 GPM

This specification is approved for use by the Naval Air Systems Command, Department of the Navy.

The complete requirements for procuring the filter element described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

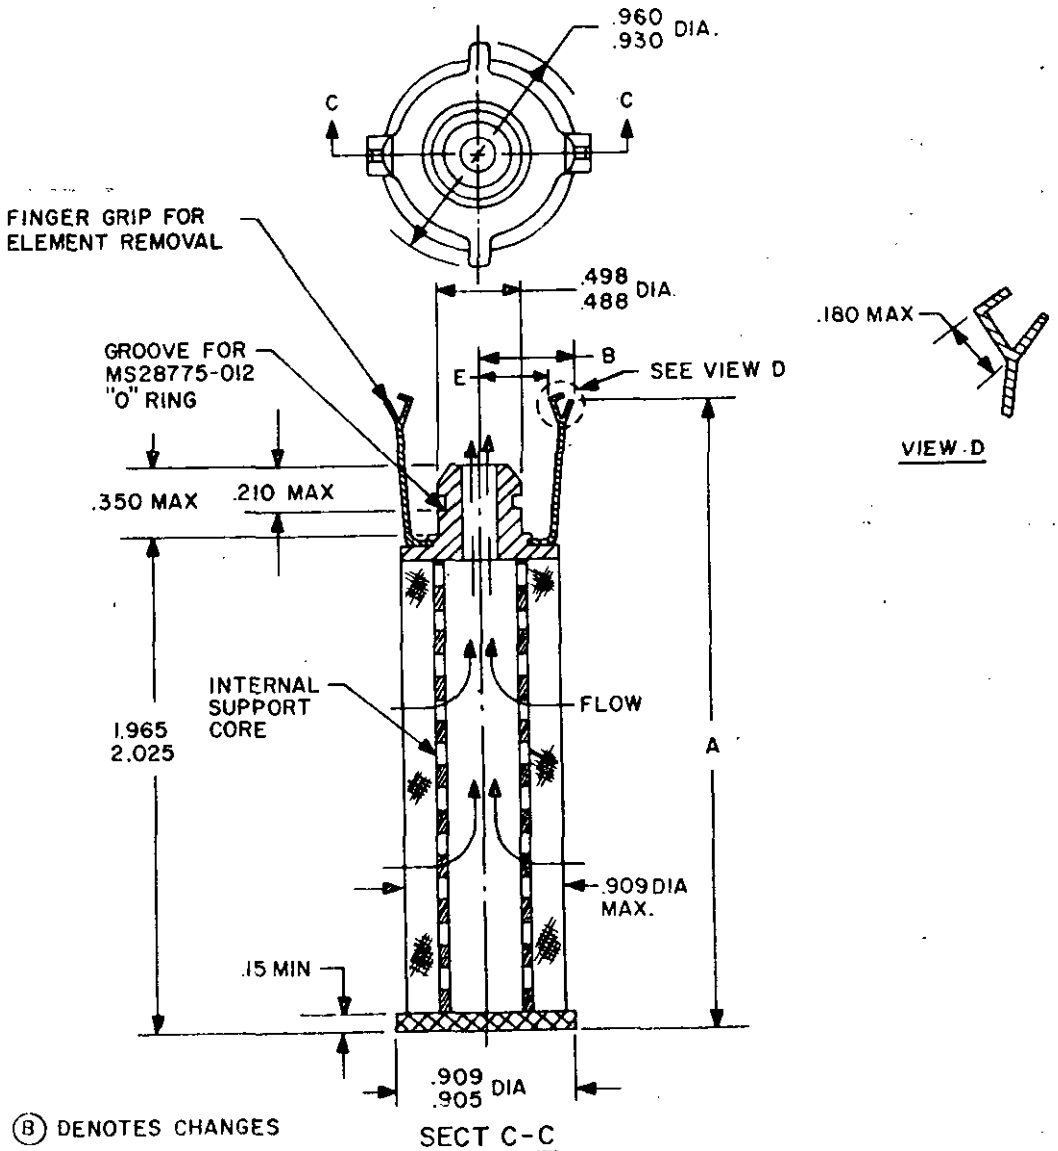

(B) DENOTES CHANGES

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

NOTES: 1. Dimension "A" shall not exceed 2.815 when dimension "B" is held to .482. Dimension "E" shall be .325 minimum when dimension "B" is held to .482.

2. Dimensions in inches, unless otherwise specified. See above Figure.

3. Tolerances, decimals ±.010, angles ±1°.

4. Unless otherwise specified, surface roughness shall not exceed 125 microinches, per MIL-STD-10. Remove all burrs and break sharp edges .005 minimum.

5. Material shall be in accordance with the procurement specification.

REQUIREMENTS:

Maximum Weight: .097 lbs.

Pressure Drop: Maximum pressure drop at rated flow across the filter element shall not exceed 15 psid.

Degree of Filtration: The filter element shall remove 100 percent of all contaminant larger than 5 microns and 94 percent of all test contaminant. The filter efficiency shall be a minimum of 94 percent.

Element Collapse: The filter element shall withstand a differential pressure of 600 psid.

Cold Start: The element shall withstand 300 psid differential pressure across the element for the flow cycles and fluid temperature as specified in the general specification. The element pressure drop shall not exceed 15 psid following the cold start test.

Maximum Particle Passed: The maximum particle passed shall be no greater than 5 microns.

Flow Fatigue: The filter element shall withstand the following flow fatigue pressure cycles at a cycling rate of 100 cpm maximum.

90,000 cycles at 20 psid pressure drop
8,000 cycles at 50 psid pressure drop
2,000 cycles at 100 psid pressure drop
100 cycles at 600 psid pressure drop

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

Part Number: The part number consists of the basic number of this specification sheet.

Example:

M8815/10

TABLE I. CONTAMINANTS

Flow Rate (GPM)	Degree of Filtration Add Rate		Maximum Particle Add Rate		Pressure Buildup		Migration Analysis Value
	F-9 Beads (gms)	AC Dust (gms)	F-9 Beads (gms)	Carbonyl Iron E (gms)	Add Rate AC Dust (gms)	Minimum Allowable 40 psid (gms)	Maximum Allowable (gms)
4.5	0.030	0.030	0.020	0.010	0.100	0.60 Ⓑ	0.004

Intended Use: The filter element covered by this specification sheet is intended for use in the model F4 aircraft operating with hydraulic fluid conforming to MIL-H-5606 at nominal operating pressures of 3,000 psi.

Preparing activity:
Navy - AS

(Project No. 1650-N074)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE: MIL-F-8815/10B(AS) FILTER ELEMENTS, NON-CLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 5 MICRON ABSOLUTE, F4 AIRCRAFT, 4.5 GPM

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
Navy Department
DOD-316



Engineering Specifications and Standards Department(Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.