
MIL-F-8815/13A(AS)
14 October 1976
SUPERSEDING
MIL-F-8815/13(AS)
26 October 1972

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, NONCLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 5 MICRON ABSOLUTE, F8 AIRCRAFT, 1.5 GPM

This specification is approved for use by the Naval Air Systems Command, Department of the Navy.

The complete requirements for procuring the filter elements described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

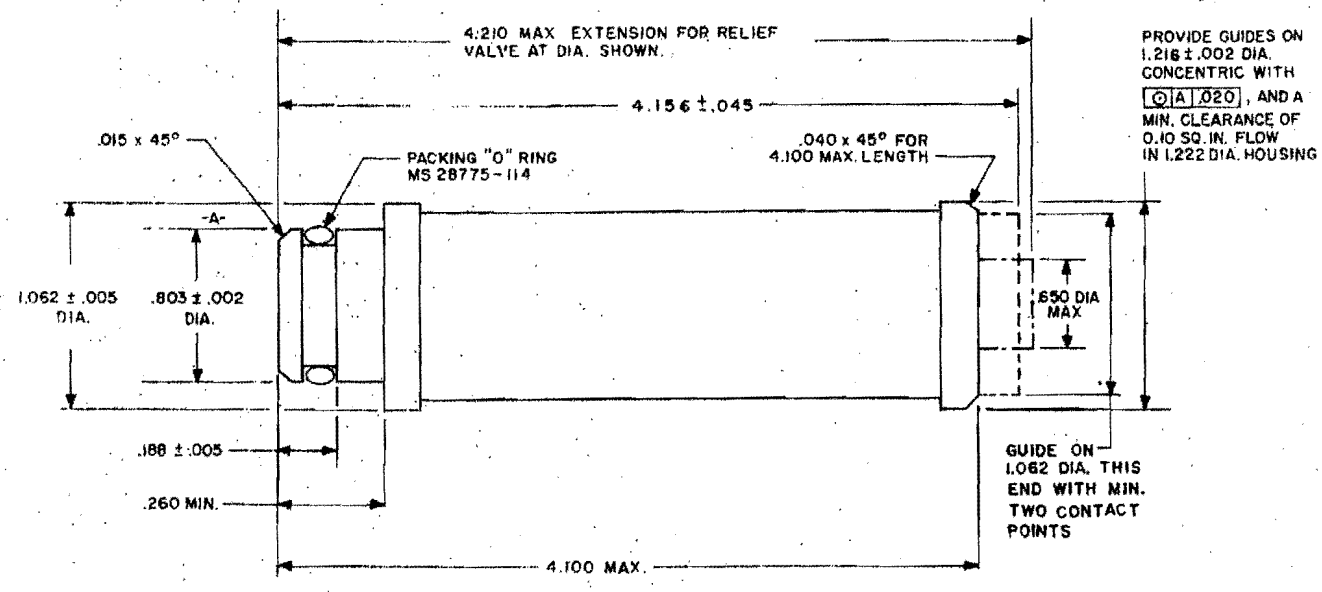

Ⓐ COMPLETE FIGURE REVISED

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

NOTES: 1. Maximum outline dimensions for relief valve assembly are as shown.

2. Relief valve assembly may be located elsewhere in element providing interchangeability of element is not affected.

3. Dimensions in inches, unless otherwise specified. See above Figure.

4. Tolerances, decimals ±.010, angles ±1°.

5. Unless otherwise specified, surface roughness shall not exceed 125 microinches, per MIL-STD-10. Remove all burrs and break sharp edges .005 minimum.

6. Material shall be in accordance with the procurement specification.

REQUIREMENTS:

Relief Valve: The relief valve, as noted in the above drawing, shall have a cracking pressure of 50 ± 5 psi.

Pressure Drop: Maximum pressure drop at rated flow across the filter element shall not exceed 15 psid.

Degree of Filtration: The filter element shall remove 100 percent of all contaminant larger than 5 microns and 95 percent Ⓐ of all test contaminant. The filter efficiency shall be a minimum of 95 percent. Ⓐ

Element Collapse: The filter element shall withstand a differential pressure of 150 psid.

Cold Start: The element shall withstand 100 psid differential pressure across the element for the flow cycles and fluid temperature as specified in the general specification. The element pressure drop shall not exceed 15 psid following the cold start test.

Maximum Particle Passed: The maximum particle passed shall be no greater than 5 microns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

Flow Fatigue: The filter element shall withstand the following flow fatigue pressure cycles at a cycling rate of 100 cpm maximum. (A)

90,000 cycles at 20 psid pressure drop
8,000 cycles at 30 psid pressure drop
2,000 cycles at 40 psid pressure drop
100 cycles at 100 psid pressure drop (A)

Part Number: The part number consists of the basic number of this specification sheet.

Example:

M8815/13

TABLE I. CONTAMINANTS

Flow Rate (GPM)	Degree of Filtration Add Rate		Maximum Particle Add Rate		Pressure Buildup		Migration Analysis Value
	F-9 Beads (gms)	AC Dust (gms)	F-9 Beads (gms)	Carbonyl Iron E (gms)	Add Rate AC Dust (gms)	Minimum AC Dust to 60 psid (gms)	Maximum Allowable (gms)
1.5	0.070	0.070	0.020	0.010	0.400	2.200	0.004

Intended Use: The filter element covered by this specification sheet is intended for use in the model F8 aircraft operating with hydraulic fluid conforming to MIL-H-5606 at nominal operating pressures of 3,000 psi.

Preparing activity:
Navy - AS

(Project No. 1650-N352-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.