
MIL-F-8815/1A
27 September 1976
SUPERSEDING
MIL-F-8815/1
29 September 1972

MILITARY SPECIFICATION SHEET

FILTER, FLUID, PRESSURE, HYDRAULIC LINE, 3000 PSI, ABSOLUTE 15 MICRON, STYLE A, BYPASS, -65° TO +275°F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter assembly described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

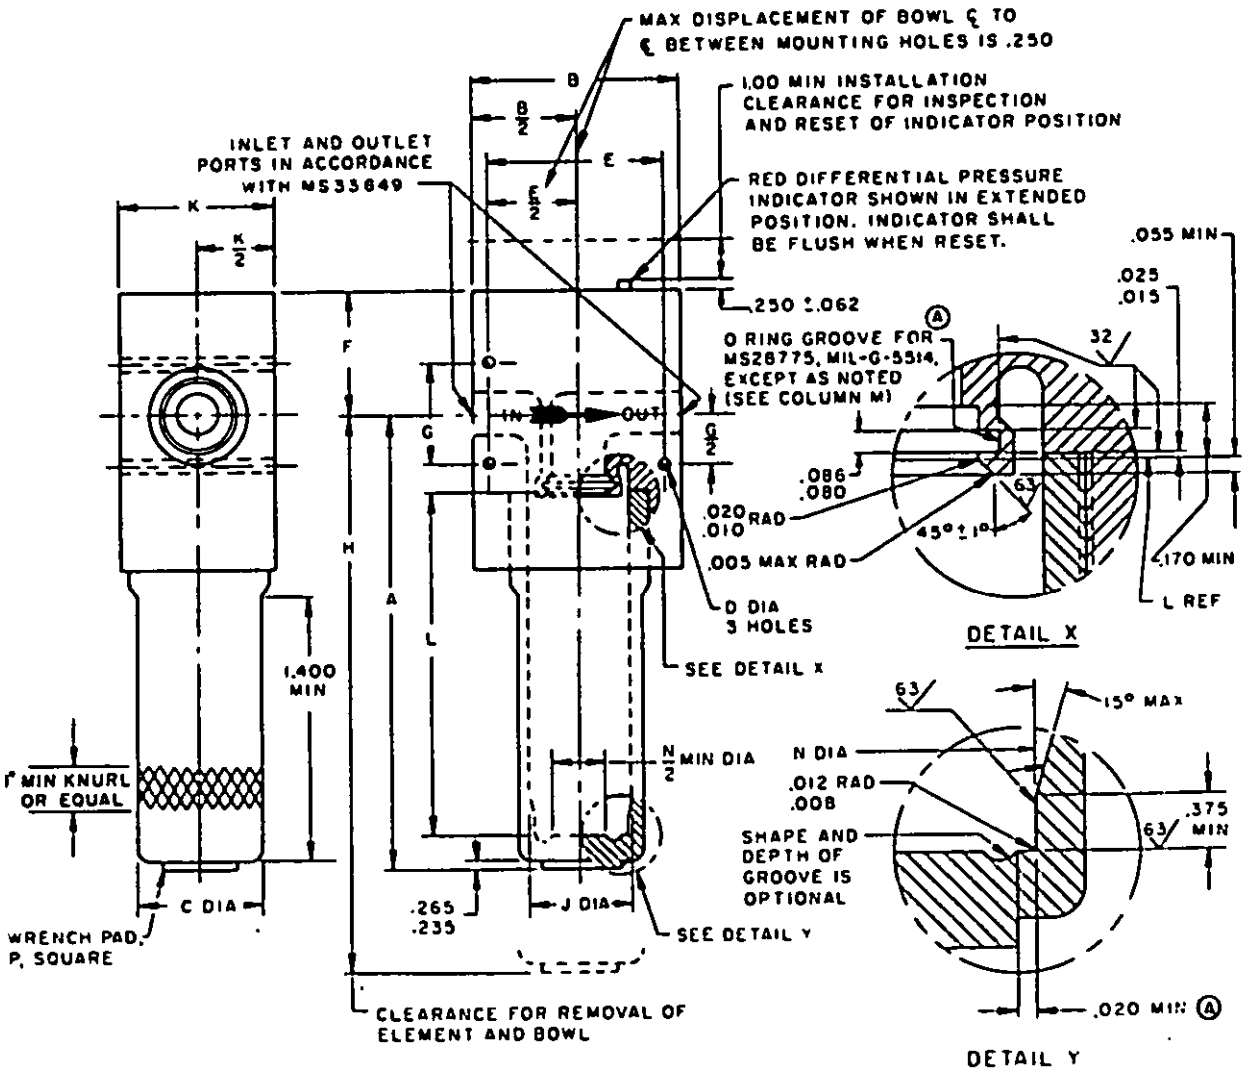

Ⓐ DENOTES CHANGES

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

NOTES: 1. Dimensions in inches unless otherwise specified. See above Figure and Table A.

2. Tolerances, decimals ±.010, angles ±1°.

3. Finish all over 100 except as noted. Surface texture in accordance with ASA B46.1 - 1962(ANSI).

4. Material shall be in accordance with the procurement specification.

5. Direction of flow and port markings shall be clearly and permanently marked on each side.

6. All joints shall be lockwired.

7. Filter assembly includes filter element M8815/3.

8. Filter element to be retained in bowl for installation and removal.

9. For dash No. -4 and -6 filter assemblies, use M8815/3-8 or -8C filter element as applicable.

TABLE A

DASH NO.		INLET AND OUTLET TUBE SIZE OD	RATED MAX FLOW GPM	A MAX	B ±.015	C MAX	D DIA ±.005	E ±.005	F MAX	G ±.005	H MAX	J ±.002	K ±.020	L	M MS28775 DASH NO.	N ±.001	P +.000 -.015	MAX DRY WT(a) LB
-4	-4C	1/4	1.2	5.485	2.750	1.562	.266	2.180	2.175	1.188	6.860	1.264	1.812	4.095	-018	1.140	.875	1.40
-6	-6C	3/8	3.5						2.200	1.312								
-8	-8C	1/2	6.		3.062			2.437	2.250	1.500								
-10	-10C	5/8	10.5	6.887	3.187	1.750		2.500	2.312	1.600	8.287	1.429	2.350	5.235	-020	1.293		2.00
-12	-12C	3/4	16.	8.117	3.625	2.000		2.625	2.375	1.800	9.447	1.639	2.570	6.235	-024	1.503	1.375	2.75
-16	-16C	1	29.	9.465	4.187	2.500		3.500	2.500	2.100	10.850	2.000	3.032	7.235	-028	1.848	1.500	4.00

(a) FOR HOUSING ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Part Number: The part number consists of the basic number of this specification sheet and a dash number taken from Table A. Add letter C after dash number to indicate a cleanable filter element is included in the filter assembly.

Example:

M8815/1-4	Filter assembly containing a M8815/3-8 noncleanable filter element.
M8815/1-4C	Filter assembly containing a M8815/3-8C cleanable filter element.
M8815/1-12	Filter assembly containing a M8815/3-12 noncleanable filter element.
M8815/1-12C	Filter assembly containing a M8815/3-12C cleanable filter element.

Intended Use: The filter assemblies covered by this specification sheet are intended for use as specified in paragraph 6.1 of the general specification.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Reviewer activities:
Army - MI
Air Force - 71

Preparing activity:
Navy - AS

(Project No. 1650-0326-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

U.S.MAIL

Engineering Specifications and Standards Department (Code 9311)
Naval Air Engineering Center
Lakehurst, New Jersey 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-F-8815/1A FILTER, FLUID, PRESSURE, HYDRAULIC LINE, 3000 PSI, ABSOLUTE 15 MICRON, STYLE A, BYPASS, -65° TO +275°F

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.