
MILITARY SPECIFICATION SHEET

FILTER, FLUID, PRESSURE, HYDRAULIC LINE, 1500 PSI, ABSOLUTE 5 MICRON, STYLE A, BYPASS, -65° TO +275°F, F/A-18E/F AIRCRAFT, CASE DRAIN

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquirihg the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-8815

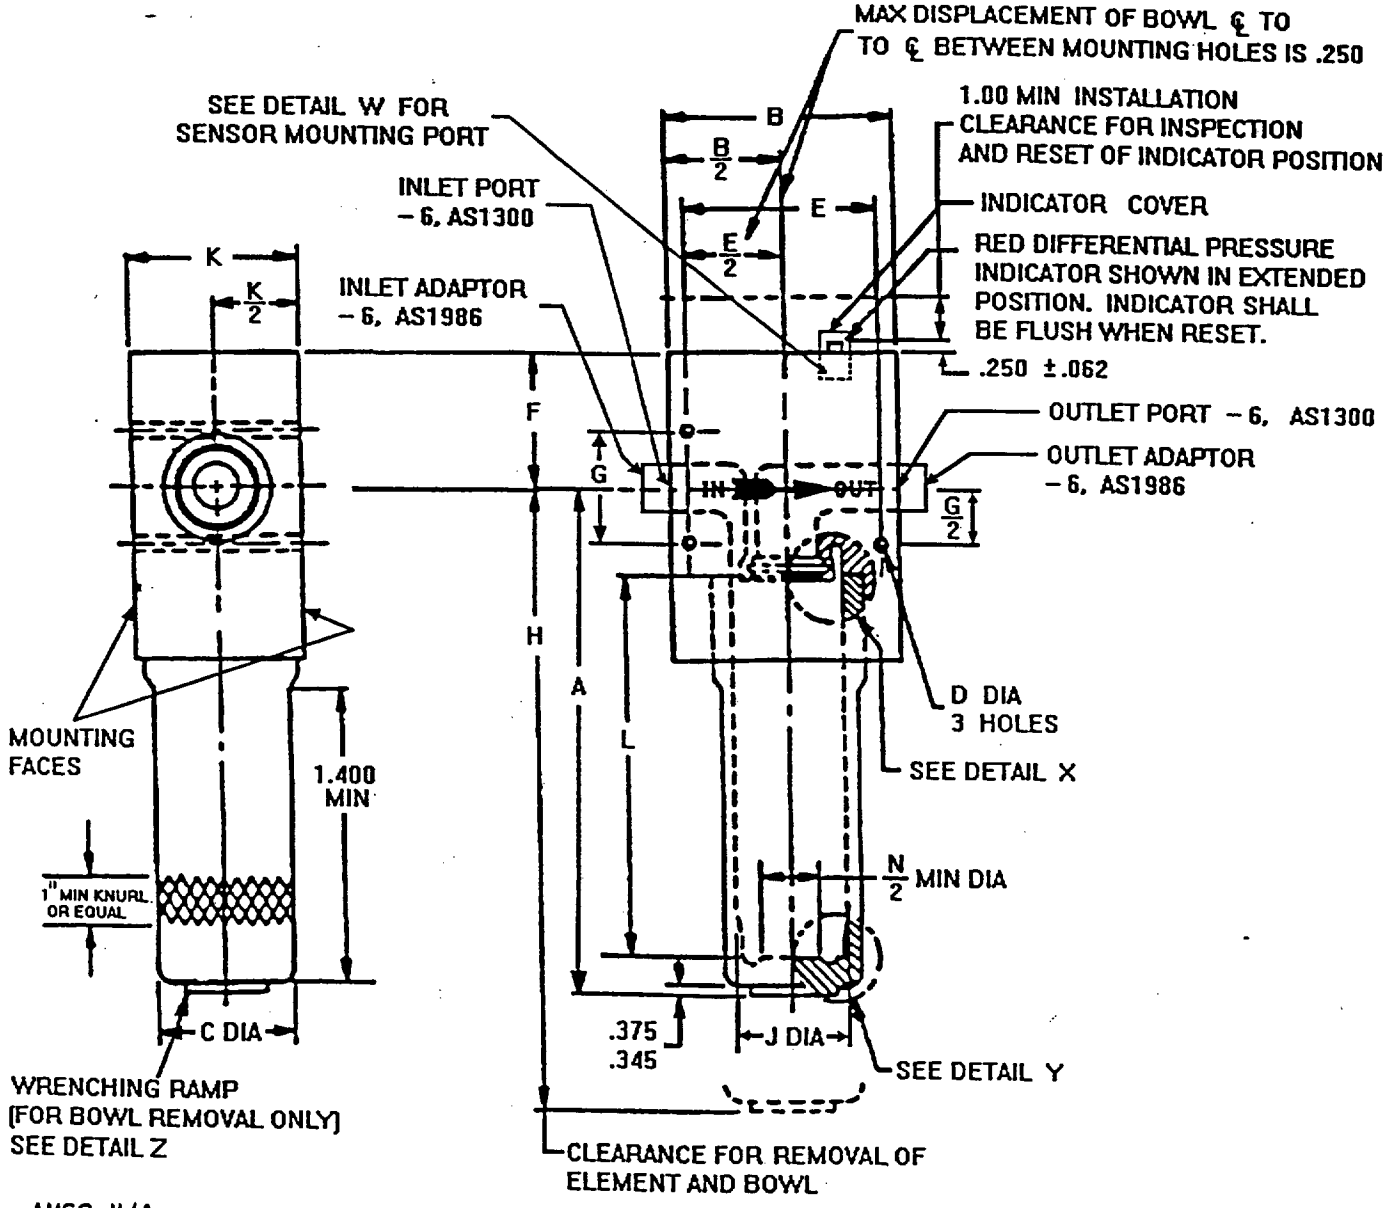


AMSC N/A

FSC 1650

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-01-11 11:31Z
Check the source to verify that this is the current version before use.

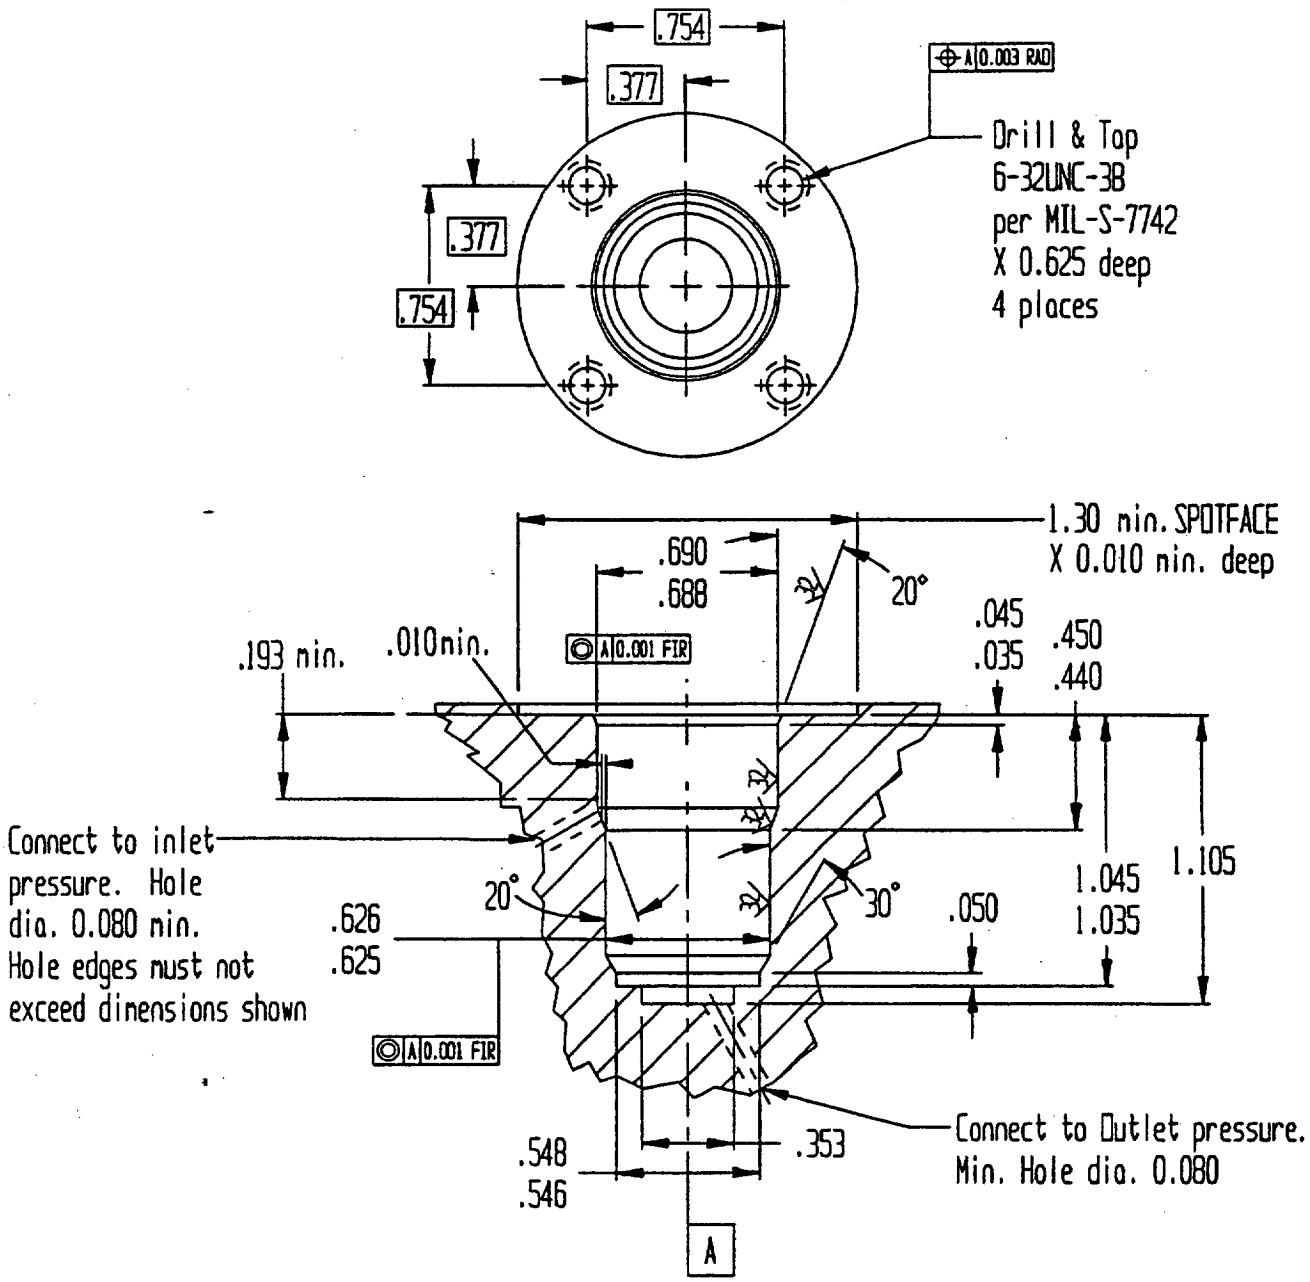


DETAIL "W"

INDICATOR PORT DETAILS


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:31Z
Check the source to verify that this is the current version before use.

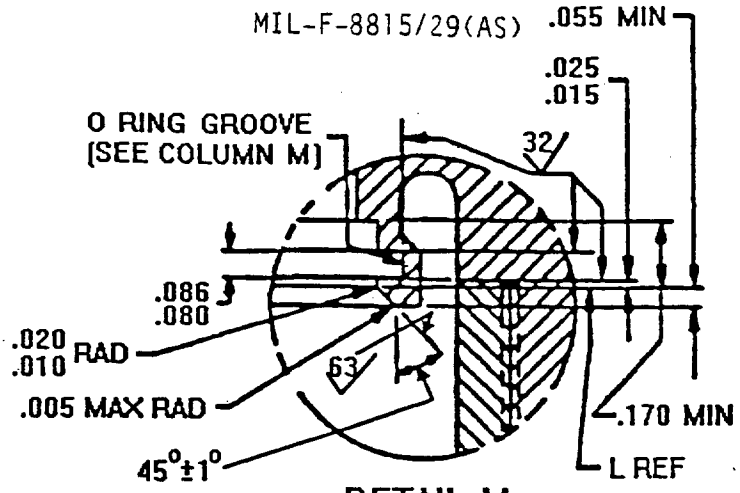


DETAIL X

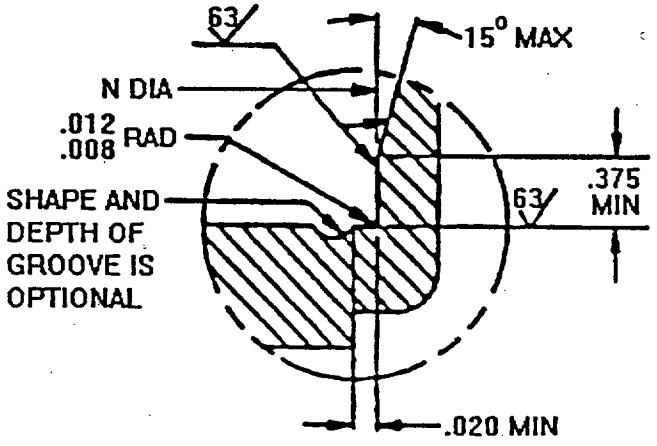

DETAIL Y

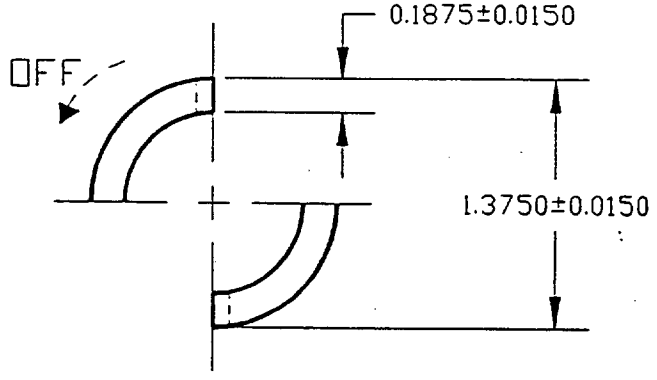

BOTTOM

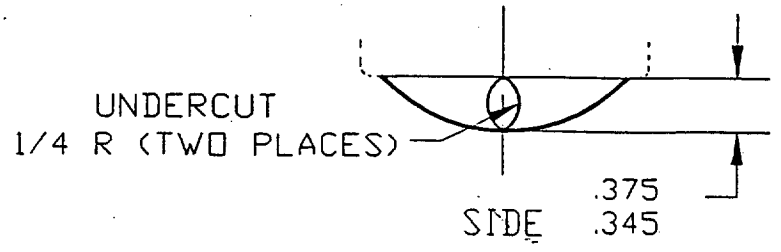

DETAIL Z

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Fluid ports to be ring locked connection type in accordance with AS1300 -6 on the inlet and outlet ports.

2. All packings shall be in accordance with MIL-R-83485/1 (except fluid adaptors).

3. External threaded fluid adaptors shall be dynamic beam seal compatible in accordance with AS1986. Packing sizes for these adaptors shall be in accordance with AS568 and packing material shall be in accordance with MIL-R-83485.

4. Paint with one coat of primer in accordance with MIL-P-23377 or MIL-P-85582, plus two coats of finish enamel in accordance with MIL-C-83286 or MIL-C-85285. Color shall be in accordance FED-STD-595, color white, number 17925.

5. A clear fluorosilicone, flexible cover shall be provided to protect the indicator button. The cover shall have provisions for replacement and shall be retained by a nylon wire bundle strap or equivalent.

6. All seal designs shall insure five percent minimum squeeze or 0.005 inch, whichever is greater. Seals that do not meet the five percent squeeze shall be subject to approval.

7. Pressure drop maximum at rated flow of 5 gpm shall be 20 psi at 180°F. The filter housing: 14 psi, the filter element: 6 psi.

8. The bowl shall be marked "HAND TIGHTEN ONLY".

9. Impulse shall be in accordance with paragraph 4.7.1.5 of MIL-F-8815. Impulse values shall be in accordance with figure 1.

NOTES:

1. Dimensions in inches unless otherwise specified. See the figure on the first page and table 1.

2. Tolerances: decimals $\pm$.010, angles $\pm$1°.

3. Finish all over 100/ except as noted. Surface texture in accordance with ASA B46.1 - 1962 (ANSI).

4. Material shall be in accordance with the procurement specification.

5. Direction of flow and port markings shall be clearly and permanently marked on each side.

6. All joints shall be lockwired, except for the bowl which shall have a positive type pawl lock, located under either port.

7. Filter assembly includes filter element M8815/6-12.

8. Filter element to be retained in bowl for installation and removal.


9. Detail W: Break all internal edges .020 rad.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:31Z
Check the source to verify that this is the current version before use.

10. Part Number: The part number consists of the basic number of this specification sheet.

Example: M8815/29

11. Intended use: The filter assembly covered by this specification sheet is intended for use as specified in paragraph 6.1 of the general specification and in the F/A-18E/F aircraft hydraulic pump case drain line at 1500 psi maximum.

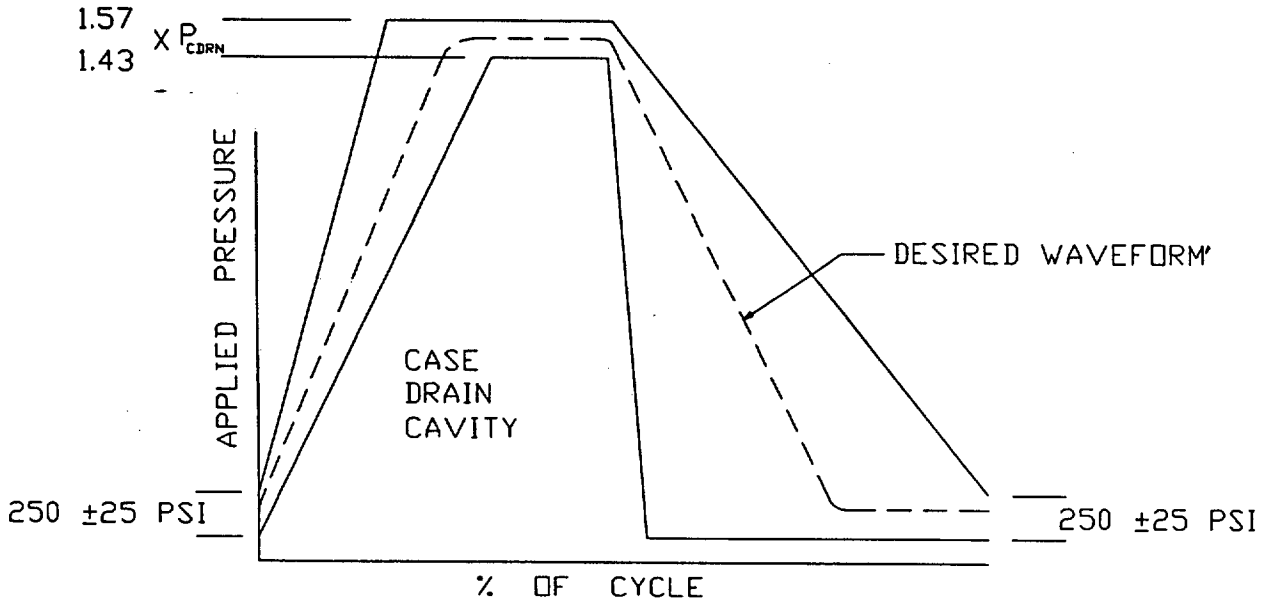

P_{CDRN} = 1500 PSI

FIGURE 1. Pressure impulse limits

Source: https://assist.dla.mil - Downloaded: 2026-10-17T11:31Z
Check the source to verify that this is the current version before use.

TABLE 1. Filter dimensions.

Inlet and Outlet Tube Size OD	Rated Max Flow GPM	A Max	B ±.015	C Max	D Dia ±.005	E ±.005	F Max
-6 in, -6 out	5	8.227	3.625	2.000	0.266	2.625	2.375

G ±.005	H Max	J ±.002	K ±.020	L	M MIL-R-83485 Dash No.	N ±.001	Max Dry Wt, Lb.
1.800	9.557	1.639	2.570	6.235	-024	1.503	3.2

Preparing Activity
Navy - AS

(Project No. 1650-N175)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:31Z
Check the source to verify that this is the current version before use.