
MIL-F-8815/2A
27 Spetember 1976
SUPERSEDING
MIL-F-8815/2
29 September 1975

MILITARY SPECIFICATION SHEET

FILTER, FLUID, PRESSURE, HYDRAULIC LINE, 3000 PSI, ABSOLUTE 15 MICRON, STYLE B, NON BYPASS, -65° TO +275°F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter assembly described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

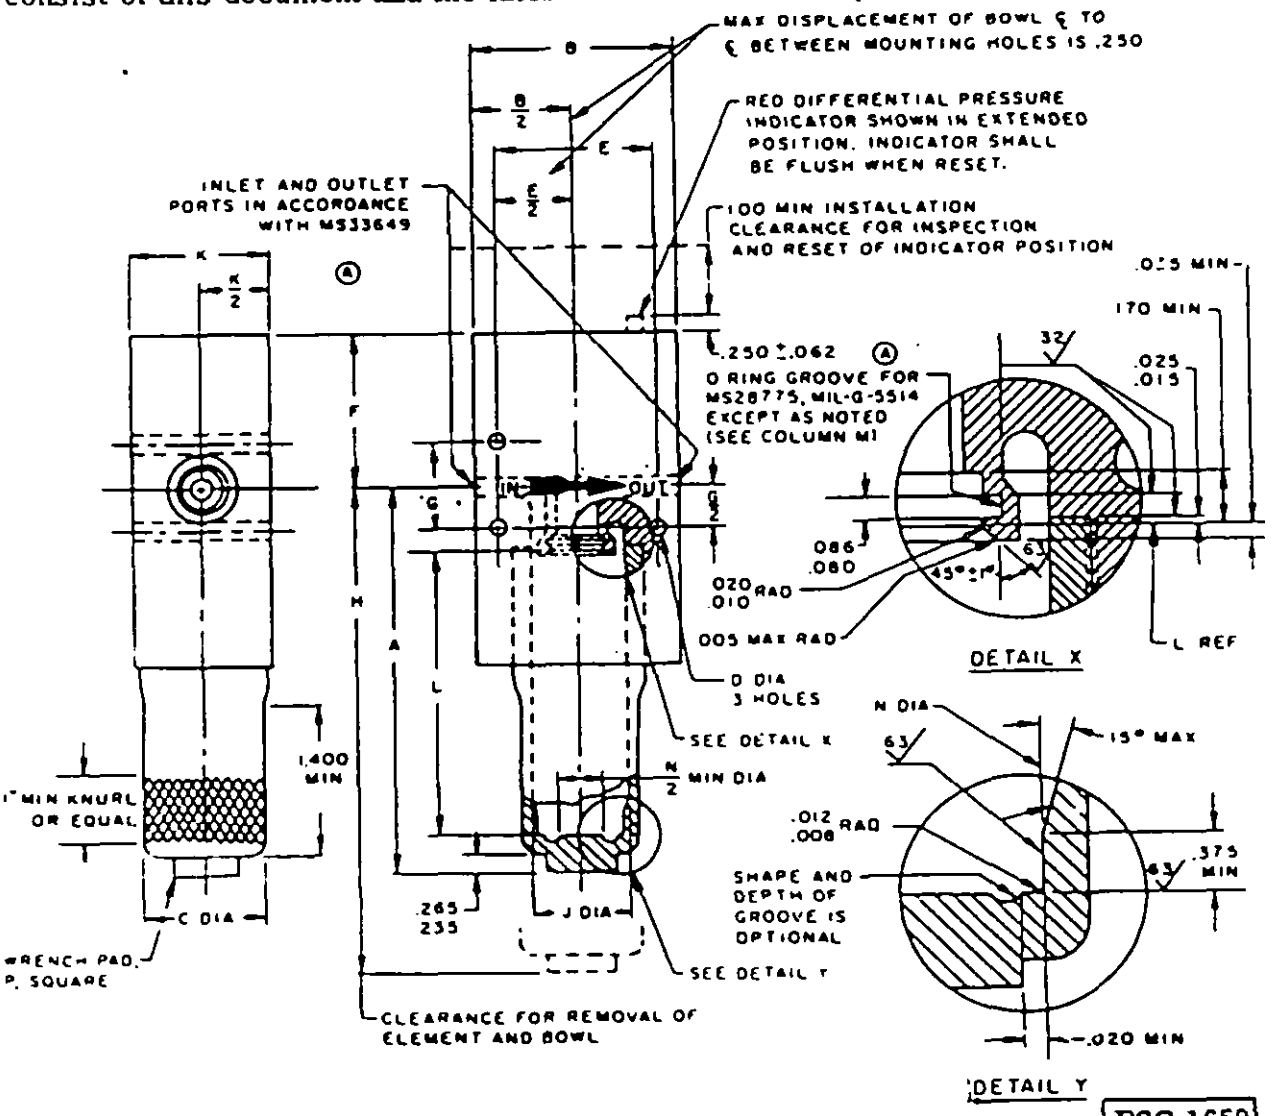

Ⓐ DENOTES CHANGES

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions in inches unless otherwise specified. See above Figure and Table A.
2. Tolerances, decimals ±.010, angles ±1°.
3. Finish all over 100 except as noted. Surface texture in accordance with ASA B46.1 - 1962 (ANSI).
4. Material shall be in accordance with the procurement specification.
5. Direction and flow of port markings shall be clearly and permanently marked on each side.
6. All joints shall be lockwired.
7. Filter assembly includes filter element M8815/3.
8. Filter element to be retained in bowl for installation and removal.
9. For dash No. -4 and -6 filter assemblies, use M8815/3-8 or -8C filter element as applicable.

TABLE A

DASH NO		INLET AND OUTLET TUBE SIZE OD	RATED MAX FLOW GPM	A MAX	B ±.015	C MAX	D DIA ±.005	E ±.005	F MAX	G ±.005	H MAX	J ±.002	K ±.020	L	M MS28775 DASH NO.	N ±.001	P +.000 -.015	MAX DRY WT(a) LB
-4	-4C	1/4	1.2	5.485	2.750	1.562	.266	2.062	2.175	1.188	6.660	1.264	1.812	4.095	-016	1.140	.875	1.40
-6	-6C	3/8	3.5						2.200	1.312								
-8	-8C	1/2	6.		3.062			2.312	2.250	1.500								
-10	-10C	5/8	10.5	6.887	3.187	1.750		2.375	2.312	1.600	8.287	1.429	2.350	5.235	-020	1.293		2.00
-12	-12C	3/4	16.	8.117	3.625	2.000		2.500	2.375	1.800	9.447	1.639	2.570	6.235	-024	1.503	1.375	2.75
-16	-16C	1	29.	9.465	4.187	2.500		3.375	2.500	2.100	10.850	2.000	3.032	7.235	-028	1.848	1.500	4.00

(a) FOR HOUSING ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Part Number: The part number consists of the basic number of this specification sheet and a dash number taken from Table A. Add letter C after dash number to indicate a cleanable filter element is included in the filter assembly.

Example:

M8815/2-4	Filter assembly containing a M8815/3-8 noncleanable filter element.
M8815/2-4C	Filter assembly containing a M8815/3-8C cleanable filter element.
M8815/2-12	Filter assembly containing a M8815/3-12 noncleanable filter element.
M8815/2-12C	Filter assembly containing a M8815/3-12C cleanable filter element.

Intended Use: The filter assemblies covered by this specification sheet are intended for use as specified in paragraph 6.1 of the general specification.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Reviewer activities:
Army - MI
Air Force - 71

Preparing activity:
Navy - AS

(Project No. 1650-0326-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.