
MIL-F-8815/6B
27 September 1976
SUPERSEDING
MIL-F-8815/6A
19 July 1974

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, NONCLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 3000 PSI, 5 MICRON ABSOLUTE, -65° TO +275°F

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter element described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

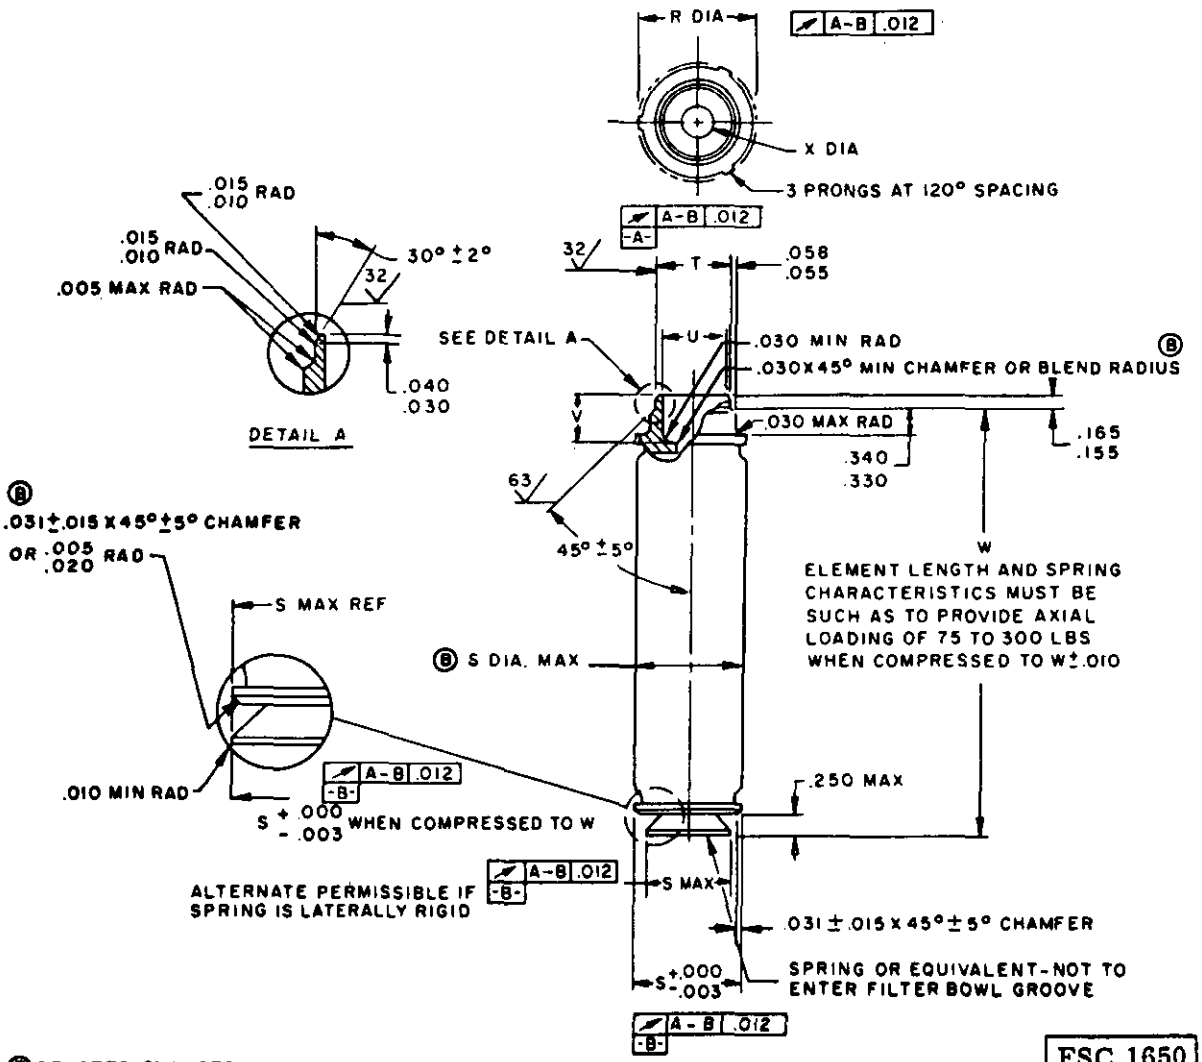

Ⓑ DENOTES CHANGES

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches unless otherwise specified. See above Figure and Table A.
2. Tolerances, decimals ± .010, anges ±1°.
3. Finish all over 100 except as noted. Surface texture in accordance with ASA B46.1 - 1962 (ANSI).
4. Material shall be in accordance with the procurement specification.
5. Filter element for use in M8815/4 and M8815/5 filter assemblies.
6. Drawing symbols per ANSI Y14.5-1973 (B)

TABLE A

DASH NO.	RATED MAX FLOW GPM	R +.000 -.010	S	T ±.001	U MIN	V MIN	W	X MIN	MAX WT LBS
-8	6.0	1.250	1.137	.748	.670	.490	4.095	.435	0.19(B)
-10	10.5	1.415	1.290	.875	.790	.600	5.235	.555	0.31(B)
-12	16.0	1.625	1.500	1.122	1.035	.690	6.235	.715	0.46(B)
-16	29.0	1.985	1.845	1.372	1.155	.760	7.235	.995	0.79(B)

REQUIREMENTS:

Pressure Drop: Maximum pressure drop at rated flow across the filter element shall not exceed 10 psid.

Degree of Filtration: The filter element shall remove 100 percent of all contaminant larger than 5 microns and 95 percent of all test contaminant. The filter efficiency shall be a minimum of 95 percent.

Element Collapse: The filter element shall withstand a differential pressure of 4500 psid.

Cold Start: The element shall withstand 3000 psid differential pressure across the element for the flow cycles and fluid temperature as specified in the general specification. The element pressure drop shall not exceed 10 psid following the cold start test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

Maximum Particle Passed: The maximum particle passed shall be no greater than 5 microns.

Flow Fatigue: The filter element shall withstand the following flow fatigue pressure cycles at a cycling rate of 100 cpm maximum. Ⓑ

90,000 cycles at 20 psid pressure drop
8,000 cycles at 50 psid pressure drop
2,000 cycles at 100 psid pressure drop
500 cycles at 3000 psid pressure drop

Part Number: The part number consist of the basic number of this specification sheet and a dash number taken from Table A.

Example:

M8815/6-12

TABLE I. CONTAMINANTS

Dash No.	Flow Rate (GPM)	Degree of Filtration Add Rate		Maximum Particle Add Rate		Pressure Buildup		Migration Analysis Value	
								Maximum Allowable (gms)	
		F-9 Beads (gms)	AC Dust (gms)	F-9 Beads (gms)	Carbonyl Iron E (gms)	Add Rate AC Dust (gms)	Minimum AC Dust to 90 psid (gms)	After Cold Start 4.7.2.3	After Vibration 4.7.2.8.3.2
-8	6.0	0.090	0.090	0.025Ⓑ	0.025	0.10	1.60	0.0035	0.0008
-10	10.5	0.170	0.170	0.050Ⓑ	0.050Ⓑ	0.18	3.40	0.0046	0.0009
-12	16.0	0.260	0.260	0.050Ⓑ	0.050Ⓑ	0.26	5.20	0.0058	0.0010
-16	29.0	0.460	0.460	0.050Ⓑ	0.050Ⓑ	0.49	7.40	0.0070	0.0015

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

Intended Use: The filter element covered by this specification sheet is intended for use as specified in paragraph 6.1 of the general specification.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Reviewer activities:
Army - MI
Air Force - 71

Preparing activity:
Navy - AS

(Project No. 1650-0326-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. *All users of military standardization documents are invited to provide* suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department
(ESSD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:27Z
Check the source to verify that this is the current version before use.