
MIL-F-8815/7B
27 September 1976
SUPERCEDING
MIL-F-8815/7A
2 November 1973

MILITARY SPECIFICATION SHEET

FILTER ELEMENTS, NONCLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 3000 PSI, 5 MICRON ABSOLUTE, -65° TO +275° F, 0.5 TO 12.0 GPM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter element described herein shall consist of this document and the latest issue in effect of Specification MIL-F-8815.

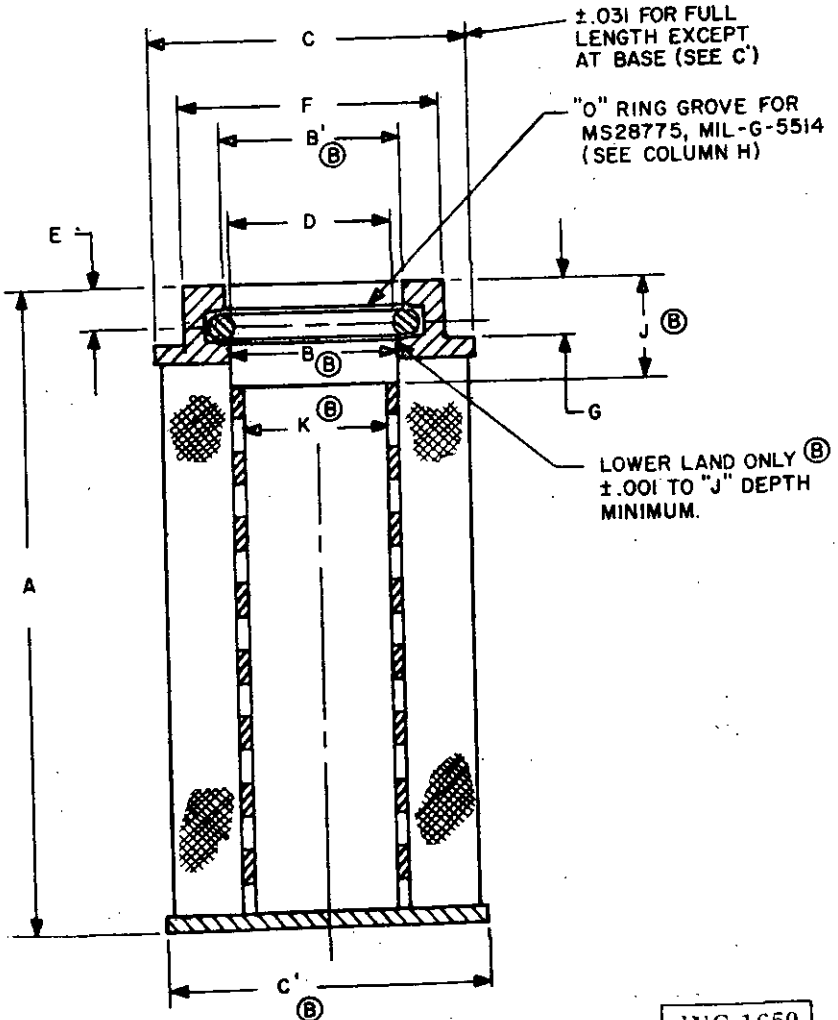

Ⓑ DENOTES CHANGES

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

NOTES: 1. Dimensions in inches unless otherwise specified. See above Figure and Table A.

2. Tolerances, fractions ±.031, angles ±1°.

3. Finish all over 100/ except as noted. Surface texture in accordance with ASA B46.1 - 1962 (ANSI).

4. Material shall be in accordance with the procurement specification.

TABLE A

DASH NO.	RATED MAX FLOW GPM	A +.062 -0	B ±.001 Ⓑ B +.020 -.001 Ⓑ	C DIA	C' ±.004 Ⓑ	D DIA NOMINAL	E MAX	F ±.016	G MIN	MAX DRY WT LB	H MS28775 DASH NO.	J Ⓑ MIN	K Ⓑ MIN
-4	.5	1.875	.377	.828	.855	.375	.109	-	-	-	-012	.416	.323
-6	3	4.625	.627	1.125	1.152	.625	.125	-	-	-	-114	.352	.419
-8	6	3.437	.877	1.625	1.652	.875	.218	1.220	.270	0.30	-212	.477	.761
-12	12	4.437	1.002	1.750	1.777	1.000	.218	-	-	-	-214	.477	.886

REQUIREMENTS:

Pressure Drop: Maximum pressure drop at rated flow across the filter element shall not exceed 10 psid.

Degree of Filtration: The filter element shall remove 100% of all contaminant larger than 5 microns and 94 percent of all test contaminant. The filter efficiency shall be a minimum of 94 percent.

Element Collapse: The filter element shall withstand a differential pressure of 4500 psid.

Cold Start: The element shall withstand 3000 psid differential pressure across the element for the flow cycles and fluid temperature as specified in the general specification. The element pressure drop shall not exceed 10 psid following the cold start test.

Maximum Particle Passed: The maximum particle passed shall be no greater than 5 microns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

Flow Fatigue: The filter element shall withstand the following flow fatigue pressure cycles at a cycling rate of 100 cpm maximum. (B)

90,000 cycles at 20 psid pressure drop
8,000 cycles at 50 psid pressure drop
2,000 cycles at 100 psid pressure drop
100 cycles at 3000 psid pressure drop

Part Number: The part number consists of the basic number of this specification sheet and a dash number taken from Table A.

Example:

M8815/7-12

TABLE I. CONTAMINANTS

Dash No.	Flow Rate (GPM)	Degree of Filtration Add Rate		Maximum Particle Add Rate		Pressure Buildup		Migration Analysis Value
		F-9 Beads (gms)	AC Dust (gms)	F-9 Beads (gms)	Iron E (gms)	Add Rate AC Dust (gms)	Minimum AC Dust to 40 psid (gms)	Maximum Allowable (gms)
4	.5	0.015	0.015	0.011 (B)	0.011	.07	.417	0.0027(B)
6	3	0.110	0.110	0.081 (B)	0.081	.5	3.00	0.0027
8	6	0.110	0.110	0.081 (B)	0.081	.5	3.00	0.0027
12	12	0.150	0.150	0.120 (B)	0.120	.7	4.45	0.0040

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

Intended Use: The filter element covered by this specification sheet is intended for use as specified in paragraph 6.1 of the general specification.

Custodians:
Army - AV
Navy - AS
Air Force - 11

Reviewer activities:
Army - MI
Air Force - 71

Preparing activity:
Navy - AS

(Project No. 1650-0326-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-F-8815/7B FILTER ELEMENTS, NONCLEANABLE, FLUID PRESSURE, HYDRAULIC LINE, 3000 PSI, 5 MICRON ABSOLUTE, -65° TO+275°F

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DOD 316

U.S.MAIL

Engineering Specifications and Standards Department (Code 9311)
Naval Air Engineering Center
Lakehurst, New Jersey 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:28Z
Check the source to verify that this is the current version before use.