JJ-G-451d
January 31, 1963

SUPERSEDING
Fed. Spec. JJ-G-451c
May 25, 1960

FEDERAL SPECIFICATION

GLOVES, CLOTH, LEATHER PALM

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers men's and women's cotton gloves with leather palms and having a gauntlet or knitted wristlet.

1.2 Classification.

1.2.1 *Types and classes.* **The gloves shall** be of the following types and classes as specified (6.2):

Type I. — Gauntlet.

Class 1.—Men's ("M" size).

Type II. — Knitted wristlet.

Class 1.—Men's ("M" size).

Class 2. — Women's ("W" size).

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276—Thread, Cotton.

FF-C-436 — Clips, Paper.

KK-L-311—Leather; Methods of Sampling and Testing.

UU-P-268 — Paper, Kraft, Untreated, Wrapping.

CCC-C-458 — Cloth, Cotton, Flannel, Canton.

CCC-T-191 — Textile Test Methods.

DDD-L-20—Label; For Clothing, Equipage and Tentage (General Use).

DDD-T-140 — Tape, Textile, Cotton, Bias-Cut.

Federal Standards:

Fed. Std. No. 102 — Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Std. No. 751 — Stitches, Seams, and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-B-17757—Boxes, Fiber, Corrugated (Modular Sizes).

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 — Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply:

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago 6, Ill.)

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street NW., Washington 6, D. C.)

3. REQUIREMENTS

3.1 Guide sample. Samples when furnished are solely for guidance and information to contractors (6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 Material.

3.2.1 *Leather.* **The leather shall be flesh side-split cowhide with shoulders removed,** or the flesh side of splits horsehide fronts. The leather shall be chrome-tanned, pliable, and shall be free from flesh cuts. Middle splits shall not be used. Loose, spongy, or flanky leather shall not be permitted.

3.2.1.1 *Thickness.* **The thickness of leather** parts of the gloves shall be as follows, except that the thickness of the welting for both the men's and women's gloves shall be not less than 1-1/2 ounces nor more than 2 ounces (4.2.2.2).

Men's gloves (class 1).
Minimum — 3 ounces.
Maximum — 3-1/2 ounces.

Women's gloves (class 2).
Minimum — 2-1/2 ounces.
Maximum — 3 ounces.

3.2.1.2 *Breaking force.* **Not less than 80** percent of the leather specimens tested shall have a breaking force value of not less than 40 pounds when tested as specified in 4.2.1. This requirement shall not apply to the leather welting.

3.2.1.3 *Stitch tearing strength.* **Not less** than 80 percent of the specimens tested shall have a stitch tearing strength of not less than 25 pounds when tested as specified in 4.2.1. This requirement shall not apply to the leather welting.

3.2.1.4 *Flexibility after soaking.* **The leather** shall not be permanently affected nor increase its flex stiffness by more than 25 percent when tested as specified in 4.2.1.

3.2.1.5 *Chemical requirements.* **The leather** shall be fully chrome-tanned and shall conform to the requirements of table I when tested as specified in 4.2.1.

TABLE I.—*Chemical requirements of leather*

	Minimum	Maximum
Chromic oxide, percent[1]	3.0	—
Chloroform extract, percent[1]	10.0	20.0
Ash, percent[1]	—	12.0
Acidity (pH)	3.5	5.0
Shrinkage temperature	96°C.	—

[1] Calculated on a moisture free basis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.1.6 *Color of leather.* The color of all leather components shall be yellow, light (pearl) gray, or brown. All leather components used in each pair of gloves shall be of the same color.

3.2.2 *Cloth, cotton, flannel, canton.* The flannel for the back of the gloves shall conform to the requirements of type IV cloth of CCC-C-458.

3.2.3 *Flannel lining.* The flannel lining for the palm, fingers, and thumb of types I and II gloves shall be a napped cotton flannel, weighing not less than 6 ounces per square yard, with a breaking strength of not less than 70 pounds in the warp and not less than 15 pounds in the filling when tested as specified in 4.2.1.

3.2.4 *Knitted cotton tubing for wristlet (type II, gloves).* The tubing for the wristlet shall be made of a true 1 by 1 rib-knit, seamless cotton tubing. The tubing for class 1 wristlets shall weigh not less than 9 nor more than 12 yards per pound, having a width not less than 3 inches, and a minimum of 14 wales and 20 courses per inch. The tubing for class 2 wristlets shall weigh not less than 12 nor more than 14 yards per pound, having a width not less than 2-1/4 inches, and a minimum of 14 wales and 20 courses per inch (4.2.1.).

3.2.5 *Laminated fabric for gauntlet (type I glove).* The finished fabric shall be composed of two thicknesses of cotton fabric securely laminated together. The face fabric shall be a cotton twill or drill weighing not less than 5 ounces per square yard and the back fabric shall be a cotton plain weave weighing not less than 2.5 ounces per square yard. The finished fabric shall contain not less than 14 ounces per square yard of natural rubber, synthetic rubber or synthetic resin. The total weight of the finished fabric shall be not less than 21.5 ounces per square yard.

3.2.6 *Thread.* The thread for stitching and seaming shall be ticket No. 20, 4-ply and ticket No. 30, 4-ply unbleached cotton thread, conforming to type IA1 of V-T-276.

3.2.7 *Binding.* The cotton binding for the top and bottom edges of the gauntlet for type I gloves shall be bleached and conform to type I of DDD-T-140. The binding shall be bias-cut and not less than 1 inch wide.

3.2.8 *Label.* Each glove shall be marked with a combination size and identification label conforming to type III or IV, class 4 of DDD-L-20. The size shall be represented by "M" for Men's and "W" for Women's. The end item is intended to be laundered.

3.3 **Design.** The gloves shall be a GUNN cut pattern, leather palm with canton flannel back. Type I shall have a gauntlet and type II shall have a knitted wristlet (figure 1).

3.4 **Patterns.** The dies or patterns for cutting all parts of the gloves shall be furnished by the contractor and shall be of the proper proportions to provide good fitting gloves conforming to finished measurements in table III.

3.5 **Illustration.** Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.6 **Construction.**

3.6.1 *Manufacturing operations requirements.* The gloves shall be manufactured in accordance with the operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations.

3.6.1.1 *Stitches, seams and stitching.* Stitches, seams and stitching types specified in table II shall conform to Fed. Std. No. 751. Whenever two or more methods, seams, or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the gloves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

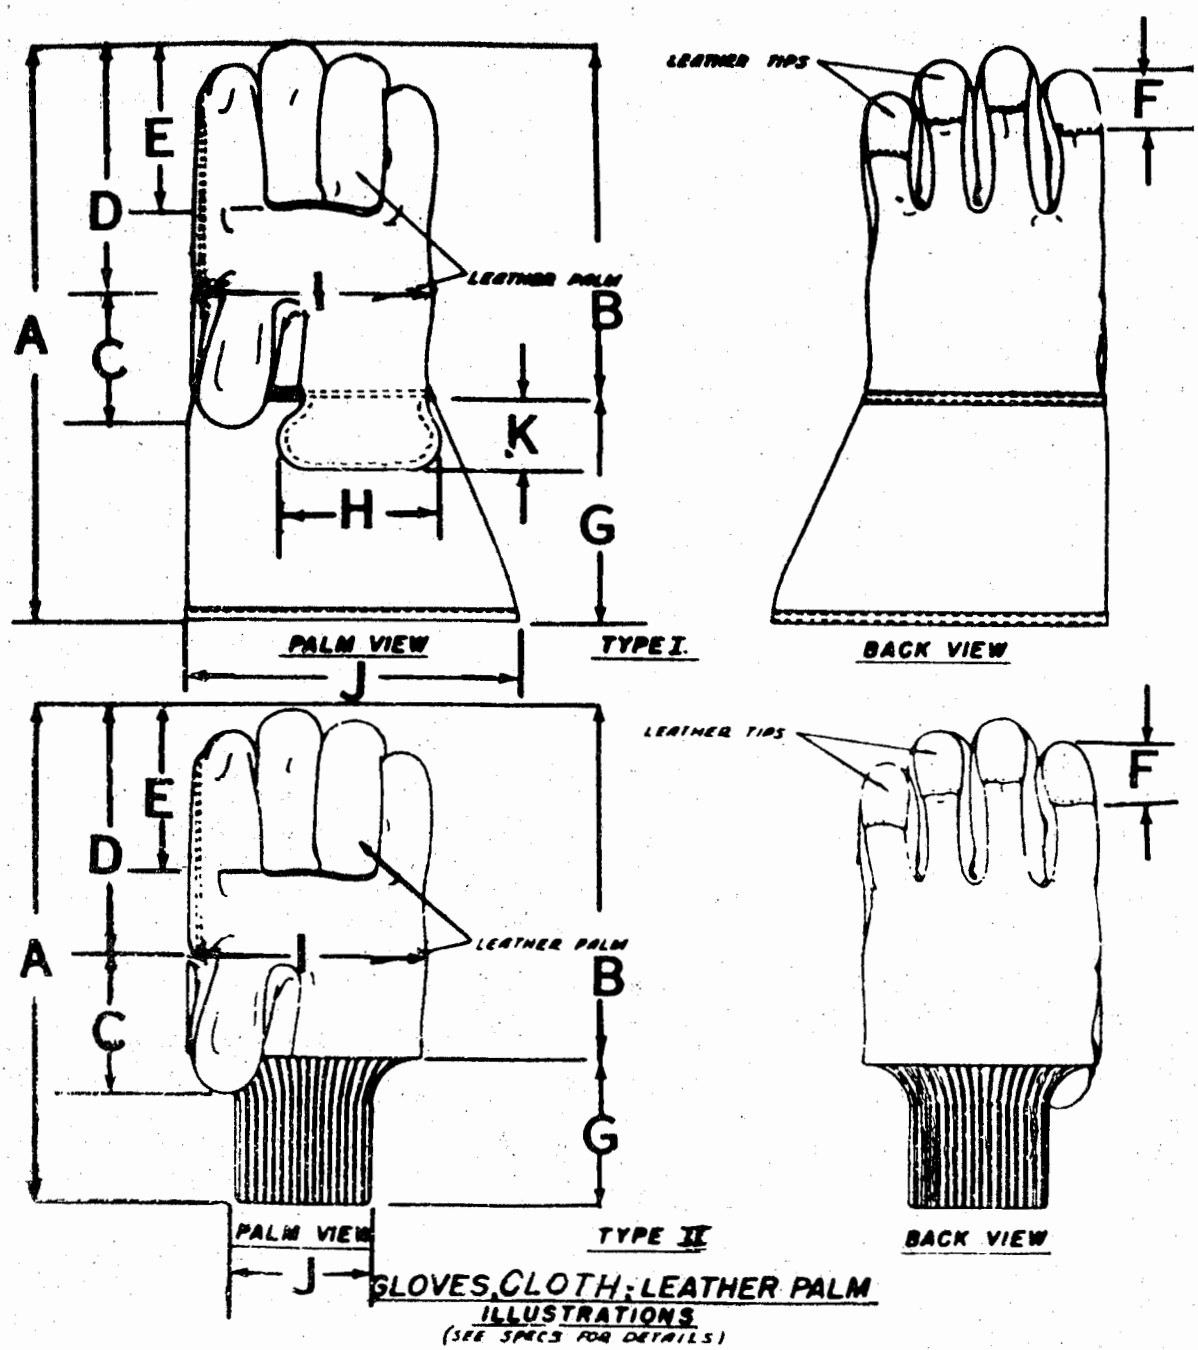


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.6.1.2 *Stitches per inch.* The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.1.3 *Thread breaks and ends of seams.* Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Ends of seams and stitching produced with 401 stitch type, when not caught in other seams or stitching shall be overstitched not less than 1/4 inch or tacked. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.6.2 *Cutting.* The leather shall be block or clicker cut. Undesirable portions of the sides such as hard or tender weak parts shall not be cut for use in the gloves. The leather components shall consist of 8 pieces as follows:

(1) Palm, front of index and small finger, underside of thumb and (reinforcement piece for type I glove) (1 piece).

(2) Top of thumb (1 piece).

(3) Front of middle and ring fingers (1 piece).

(4) One strip of welting for insertion along base of middle and ring fingers (1 piece).

(5) Four tips for back of fingers (4 pieces).

TABLE II.—*Requirements*

No.	Manufacturing Operations Requirements	Stitch Type	Seam and Stitching Type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
1.	Join fourchettes to palm inseaming with one row of stitching, 1/8- to 3/16-inch gage. The welting strip is to be securely caught in the seaming at base of second and third fingers. The finished welt shall measure not less than 1/16 nor more than 3/16 inch from the fourchette stitching. The ends of the welt shall be 3/8 ± 1/8 inch from the closing seam.	301	SSa-1	8-10	20-4	20-4
		or 401	SSa-1	8-10	20-4	30-4
2.	The thumb piece shall be inseam sewn to the palm with one row of stitching 1/8- to 3/16-inch gage.	301	SSa-1	8-10	20-4	20-4
		or 401	SSa-1	8-10	20-4	30-4
3.	The palm, thumb, and fingers are to be lined with flannel, as specified in 3.2.3, securely caught in entire length of closing side seam; the cuff joining seams thumb and palm joining seams and tacked at the tips of fingers.	301	SSa-1	8-10	20-4	20-4
		or 401	SSa-1	8-10	20-4	30-4
4.	Join the leather on thumb side to canton flannel with lapped seam by a double row of stitching 1/16- to 3/16-inch gage.	301	LSa-2	8-10	20-4	20-4
		or 401	LSa-2	8-10	20-4	30-4
5.	The leather tips shall be stitched to canton flannel across the back of each finger 1-1/4 ± 1/8 inch down from tip of finger with one row of stitching 1/16- to 3/16-inch gage and caught in the closing seams.	301	SSa-1	8-10	20-4	20-4
		or 401	SSa-1	8-10	20-4	30-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II.—*Requirements (Con't)*

No.	Manufacturing Operations Requirements	Stitch Type	Seam and Stitching Type	Stitches per inch	Thread	
					Needle	Bobbin or Looper
6.	The closing shall be full inseamed, each end of the closing seam being secured by backstitching, overstitching, or tacking.	301 or 401	SSa-1	8-10	20-4	20-4
			SSa-1	8-10	20-4	30-4
7.	The leather reinforcement piece shall be stitched to the front (palm side) of the gauntlet with one row of stitching around the sides and top edge, 1/16- to 3/16-inch gage and caught in seam joining cuff gauntlet to hand portion.	301	SSa-1	8-10	20-4	20-4
8.	Type I.—(Gauntlet cuff)					
	(*a*) The gauntlet, made of laminated cotton fabrics, shall be attached to top of hand at wrist by a double row of stitching.	301 or 401	SSa-2	8-10	20-4	20-4
			SSa-2	8-10	20-4	30-4
	(*b*) The bottom edge (edge attached at wrist) of gauntlet shall be bound with cotton binding and the binding turned under 3/16 to 1/4 inch on the outside.	301	BSb-1	8-10	30-4	30-4
	(*c*) Bind top edge (edge at open end of glove) of gauntlet cuff with raw edges of binding turned in 3/16 to 1/4 inch and caught within the seaming.	301	BSc-1	8-10	30-4	30-4
9.	Type II.—(Knitted wristlet) The knitted cotton tubing shall be cut a sufficient length to permit the wristlet to be formed double thickness by folding over and inseaming the bottom edge of wristlet to top of hand portion at wrist with a double row of stitching 1/8 to 3/16 inch between rows with 1/4- to 3/8-inch seam allowance.	301 or 401	SSa-2	8-10	20-4	30-4
10.	Apply label to back outside of cuff of type I glove and on back outside of hand part of type II glove.					
11.	Forming. All gloves shall be formed on heated forms. Thumbs and seams shall be worked out over the forms.					
12.	Match and pair gloves. Tack each pair of gloves together with not less than 2 stitches using a cord thread which will permit the pair to be pulled apart without tearing the fabric. Type I gloves shall be tacked at closing seam of gauntlet, 1/2 to 1 inch from top of gloves. Type II gloves shall be tacked 1-1/4 to 1-1/2 inches from edge of knitted cuff and 1/2 to 1 inch from top of gloves.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.7 Measurements. The finished gloves shall conform to the measurements specified in table III.

3.8 Workmanship. The finished gloves shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Contractor's inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Except when otherwise specified by civil agencies, inspection shall be in accordance with MIL-STD-105, except where otherwise indicated herein.

4.2.1 ***Inspection of components.*** **In addition** to the quality assurance provisions of the subsidiary specifications and drawings, components and materials shall be tested as specified in 4.2.1.1 and 4.2.1.2. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in tables IV and V, they shall be as required by the referenced method.

4.2.1.1 ***Leather testing.*** **The leather shall** be tested for the characteristics in table IV. The test methods listed in table IV shall be in accordance with KK-L-311, wherever applicable. The sample unit for all required tests is one 8- by 8-inch piece of leather and the

TABLE III.—*Measurements*[1]

Location	Type			Tolerance
	I, Class 1	II, Class 1	II, Class 2	plus or minus
	Inches	*Inches*	*Inches*	*Inch*
A Over-all length, tip of 2nd finger to top of cuff	12-1/2	10-1/4	10	1/2
B Hand length, top of 2nd finger to wrist seam	7-1/2	7-1/2	7-1/4	1/4
C Length of thumb, crotch to tip	3-1/8	3-1/8	2-3/4	1/8
D Reach, base of thumb to tip of 2nd finger	5-1/2	5-1/2	5-1/8	1/2
E Length of 2nd finger, crotch to tip	3-1/2	3-1/2	3-1/4	1/8
Length of other fingers in proportion				
F Length of tips on back	1-1/4	1-1/4	1-1/4	1/8
G Length of cuff, top to wrist seam	5	2-3/4	2-3/4	1/4
H Width of pull tab on cuff	3-1/4	—	—	1/2
I Width of glove at thumb	5-1/4	5-1/4	4-1/2	1/4
J Width of cuff, top opening	7	3-1/4	2-1/2	1/4
K Depth of reinforcement piece	1-3/4	—	—	1/4

[1] See figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

sample shall consist of 15 pieces; one piece selected from each 15 sides or fronts. Sampling procedure and location from which the sample unit is to be obtained shall be in accordance with the sampling of non-fabricated leather in the Sampling and Acceptance Procedures of KK-L-311. The test specimens shall be cut with the long dimension perpendicular to the backbone.

TABLE IV.—*Leather component tests*

Component and lot size expressed in terms of	Characteristics	Requirement paragraph	Test method of KK-L-311	Requirements applicable to		Number determinations per sample unit	Results reported as:	AQL
				Sample unit	Lot average			
Material, leather (1 side or front)	Material identification	3.2.1	Standard commercial	X	—	1	Pass or fail	6.5
	Breaking force	3.2.1.2	2011 [1]	—	X	—	—	N/A
	Stitch tearing strength	3.2.1.3	2151 [2]	—	X	—	—	N/A
	Flexibility (after soaking)	3.2.1.4	4.2.1.1	X	—	1	Pass or fail	6.5
	Tannage	3.2.1.5	Standard commercial	X	—	1	Pass or fail	6.5
	Chromic oxide	3.2.1.5	6511 or 6515	—	X	—	—	N/A
	Chloroform extract	3.2.1.5	6311	—	X	—	—	N/A
	Ash, total	3.2.1.5	6421	—	X	—	—	N/A
	Acidity (pH)	3.2.1.5	6621	—	X	—	—	N/A
	Shrinkage temperature	3.2.1.5	7011 [3]	—	X	—	—	N/A

[1] Exception to method 2011—The term "breaking force" shall be used in lieu of "tensile strength" where applicable in this test method. The scope shall be revised to state that this method is intended for use in determining the breaking force value of leather. The cross-sectional area of the specimen and the calculation of tensile strength need not be determined. The breaking force of the sample shall be recorded to the nearest pound.

[2] Exception to method 2151—A piece of steel wire 0.041 ± 0.001 inch in diameter and not less than 4 inches in length shall be used in place of the soft metal. The wire shall conform to requirements for type I, size 1, heavy duty of FF-C-436. The thickness of the specimen need not be determined. Two holes each 5/64 inch in diameter shall be punched in one end of the specimen, the center of the holes being 1/4 inch from the end, 1/4 inch apart and located equidistant from the centerline (length-wise) of the specimen. The tearing strength of each of the specimens tested shall be recorded to the nearest pound.

[3] Exception to method 7011—The heating medium shall be water.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.1.1.1 *Test for flexibility after soaking.* The specimen shall be 3 by 4 inches, cut with the long dimension perpendicular to the backbone. The specimen shall be folded in half, grain side out, to form a rectangle 3 by 2 inches (crease parallel to backbone), then carefully folded in half again to form a rectangle 3 inches by 1 (approx) inch, 4 layers thick. The folded specimen shall be secured with staples across the width, 1/4 inch from each end. The ends shall be gripped between thumb and forefinger and the specimens shall be twisted torquewise 40 times by describing an angle of 180°. One end of the specimen shall then be fastened in the vise of the tester in such a way that the cut edges on the upper side face outward from the machine. The other end of the specimen shall extend 2 inches from the vise. The stiffness of the specimen shall be determined as specified in method 4211 of KK-L-311 by binding the specimen 20 degrees, using a 1-inch span and a bending moment of 0.5-inch pound. The results shall be recorded in pounds. The specimens shall then be immersed in distilled water of 140°±5°F. (60°±3°C.) for 20 hours ±2 hours; 1,000 ml. of water shall be used for 15 specimens. Complete immersion of the specimens shall be accomplished by placing a floating cover on the vessel used for the immersion. The specimens shall be removed, air-dried, conditioned for 72 hours and retested for stiffness as described for unsoaked specimens. The percent increase in flex stiffness shall be calculated as follows:

$$\frac{S_2 - S_1}{S_1} \times 100$$

Where S_2 is the average stiffness, in pounds, of the soaked specimens.

S^1 is the average stiffness, in pounds of the unsoaked specimens.

4.2.1.2 *Fabric testing.* The fabrics shall be tested for the characteristics in table V. The test methods listed in table V shall be in accordance with CCC-T-191, wherever applicable. The sample unit shall be 1-yard full width except that for the knitted tubing the sample unit shall be 1/2-yard full width. The sample size shall be as follows and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

Lot size (yards)	*Sample size (units)*
Less than 800	2
801 to 22,000	3
22,001 and over	5

TABLE V.—*Fabric component tests*

Component	Characteristic	Requirement reference	Test method of CCC-T-191	No. determinations per sample unit	Results reported as
Flannel lining	Material identification	3.2.3	1200	—	—
	Weight	3.2.3	5041	—	—
	Breaking strength	3.2.3	5100	—	—
Knitted cotton tubing	Material identification	3.2.4	1200	—	—
	Cuff construction	3.2.4	Visual	1	Pass or fail
	Weight	3.2.4	5041	—	—
	Yarns per inch	3.2.4	5070	—	—
Laminated fabric	Material identification	3.2.5	1200	—	—
	Weight of face fabric	3.2.5	5041	—	—
	Weight of back fabric	3.2.5	5041	—	—
	Weight of rubber	3.2.5	5041	—	—
	Total weight	3.2.5	5041	—	—

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.2 *Inspection of end item.*

4.2.2.1 *Visual examination.* The gloves shall be examined for defects listed in table VI. The sample unit shall be one glove and selection shall be by pairs. The sample unit for pairing defects shall be one pair. Defects of pairing shall be classified as a single defect. The sample size shall be in accordance with inspection level II and the AQL shall be 4.0 major and 10.0 total (major and minor combined) defects per hundred units. The lot size shall be expressed in units of one glove each.

TABLE VI.—*Classification of visual examination defects*

Examine	Defect	Classification	
		Major	Minor
Pairing	Not properly mated, e.g., not right and left of the same size	X	
	Badly shaded, wide variation in color		X
	Not tacked together as specified		X
Cleanliness	Any spot, stain or foreign matter clearly noticeable		X
Color	Not as specified in color	X	
	Color not uniform		X
Type	Not type specified	X	
Leather	Not horsehide or cowhide	X	
	Not split leather as specified		X
	Loose, spongy, flanky, open cut or open scratch:		
	Seriously affecting serviceability	X	
	Affecting serviceability but not seriously		X
	Any open vein		X
	Any hole or tear	X	
	Not soft or pliable	X	
	Any scar, brittle or bony area, abraded area		X
Knitted cotton tubing (type II)	Any hole, cut, tear, dropped stitch, or run:		
	Seriously affecting serviceability	X	
	Affecting serviceability but not seriously		X
	Slubby yarn		X
	Any thin area or mend		X
	Not seamless	X	
Laminated fabric (type I)	Any cut, hole, tear, burn:		
	Seriously affecting serviceability	X	
	Affecting serviceability but not seriously		X
	Any evidence of delamination		X
	Any slub, wrinkle, pick, or skip		X
Flannel fabric	Any hole, cut, tear, or rip:		
	Seriously affecting serviceability	X	
	Affecting serviceability but not seriously		X
	Not napped		X
	Broken or missing yarn, open place clearly visible		X
Construction and workmanship, general (applicable to all components unless otherwise indicated herein)	Any component omitted, misplaced, or operation omitted:		
	Seriously affecting serviceability e.g. fingers badly twisted or distorted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE VI.—*Classification of visual examination defects (Con't)*

Examine	Defect	Classification	
		Major	Minor
Construction and workmanship, general (applicable to all components unless otherwise indicated herein) (cont'd)	Affecting serviceability but not seriously		X
	Needle chews	X	
	Not assembled as specified: Seriously affecting serviceability	X	
	Affecting serviceability but not seriously		X
Seams and stitching	Any open seam (see note)		X
	Note.—When one or more stitches are broken or two or more consecutive skipped stitches or run-offs occur on a single stitched seam or on both rows of stitching on a double stitched seam, it shall be classified as a major defect. When one or more stitches are broken or two or more continuous skipped stitches or run-offs occur on only one row of a double stitched seam, it shall be classified as a minor defect.		
	Looper thread exposed on outside of glove when 401 stitch type is used.		X
	Not specified seam or stitch type	X	
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight tension resulting in cutting of leather or breaking of stitches when normal pull is applied	X	
Seams and stitching (cont'd)	Any row of stitching omitted	X	
	One or two stitches per inch less than specified		X
	Three or more stitches per inch less than specified	X	
	More than the specified number of stitches per inch but not damaging material		X
	More than the specified number of stitches per inch damaging material	X	
	Gauge of stitching irregular or not as specified		X
	End of seam not backstitched as specified (not applicable to end of a seam that is caught in another row of stitching)		X
Welting	Not securely caught in seam	X	
	Width not uniform or does not protrude a uniform distance from seam		X
Fit of parts	Any part or assembly not properly affixed: Seriously affecting serviceability, e.g. flannel lining wrinkled or excessive bulk in crotch of fingers	X	
	Affecting serviceability but not serious		X
Reinforcement piece	Reinforcement piece not stitched around sides and top edge	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Knitted wristlet	Not double thickness of material ------	X	
Finishing	Loose threads not trimmed throughout glove --------		X
	Not neatly laid off, i.e., glove is wrinkled or does not otherwise present a neat appearance		X
Markings	Missing, incomplete, incorrect, not legible, not specified type or size, not in proper location or not accomplished in the specified manner ----------		X

4.2.2.2 *Dimensional examination.* The gloves shall be examined for dimensional defects, including thickness of leather. Any dimension not within the specified tolerance shall be classified a defect. The sample size shall be in accordance with inspection level L6 and the AQL shall be 4.0 defects per hundred units. The sample unit shall be one glove. The lot size shall be expressed in units of one glove.

NOTE. Each leather part of the glove shall be checked for thickness, i. e., thumb, body of glove, fourchettes and welts (where feasible). Any of these parts that are not within the required thickness range shall constitute a defect. Thickness shall be determined in accordance with method 1011 of KK-L-311.

4.2.3 *Inspection for preparation for delivery.* An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per hundred units.

Examine	*Defect*
Markings (exterior and interior)	Omitted; incorrect; illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing.
	Any component damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, improper taping and inadequate stapling.
	Bulging or distortion of containers.
Content	Number of bundles per container is more or less than required.
	Number per bundle is more or less than required.[1]

[1] For this defect, two bundles shall be examined from each shipping container in the sample.

5. PREPARATION FOR DELIVERY

(For civil agency procurements Fed. Std. No. 102 shall be referred to for definitions and application of the various levels of packaging and packing.)

5.1 Packaging. Packaging shall be level A or C, as specified (6.2).

5.1.1 *Level A.* Five pairs of gloves of one type and class only, shall be neatly stacked in a bundle with every other pair reversed end for end, and securely tied at each end with cotton tape or twine.

5.1.2 *Level C.* Gloves shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (6.2).

5.2.1 *Level A.* One hundred and twenty pairs (24 bundles) of gloves of one type and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, size 3 of MIL-B-17757. Type I bundles shall be packed flat four in length, one in width, and six in depth within a shipping container. The type I bundles shall be arranged fingertip to cuff and staggered so that each bundle end abuts a side panel. Type II bundles shall be packed flat two in length, three in width, and four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2 *Level B.* One hundred and twenty pairs (24 bundles) of gloves of one type and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, size 3 of MIL-B-17757. Type I bundles shall be packed flat four in length, one in width, and six in depth within a shipping container. The type I bundles shall be arranged fingertip to cuff and staggered so that each bundle end abuts a side panel. Type II bundles shall be packed flat two in length, three in width, and four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.3 *Level C.* Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules and regulations of carriers applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civilian agencies.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Intended use.** The gloves covered by this specification are primarily work gloves for use by personnel of the Military Services and Civil Government Agencies.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and class required (1.2).

(*c*) Selection of applicable levels of packaging and packing (5.1 and 5.2).

(*d*) Options required by civil agencies.

6.3 **Sample.** For access to the guide sample, address the procurement office issuing the invitation for bids.

6.4 **For civil agencies.** Level A for packaging and level B for packing should be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to ultimate consumers.

6.5 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail — Types I and II

Gloves, workman's, cotton, with leather fingers or palms.

Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification

Motor — Types I and II

Gloves, workman's, cotton, with leather fingers or palms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Truckload minimum weights — 22,000 and 24,000 pounds, subject to Rule 115, National Motor Freight Classification

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:

Army — M Q
Navy — S MC Sh Y CG

Copies of this specification may be purchased

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.