JJ-G-451e
May 15, 1967
SUPERSEDING
Fed. Spec. JJ-G-451d
January 31, 1963

FEDERAL SPECIFICATION

GLOVES, CLOTH, LEATHER PALM

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 This specification covers men's and women's cotton gloves with leather palms and having a gauntlet or knitted wristlet.

1.2 Classification.

1.2.1 Types, classes, and styles. The gloves shall be of the following types, classes, and styles, as specified (see 6.2).

Type I—Gauntlet.
Class 1—Men's ("M" size).
Style A 5-inch length gauntlet.
Style B 2½-inch length gauntlet.

Type II—Knitted wristlet.
Class 1—Men's ("M" size).
Class 2—Women's ("W" size).

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276—Thread, Cotton.
KK-L-162—Leather, Cattlehide, Chrome Tanned, for Gloves, Garments, and Equipage.
KK-L-311—Leather; Methods of Sampling and Testing.
UU-P-268—Paper, Kraft, Untreated, Wrapping.
CCC-C-458—Cloth, Flannel, Cotton.
CCC-T-191—Textile Test Methods.
DDD-L-20—Label; For Clothing, Equipage and Tentage (General Use).
DDD-T-140—Tape, Textile, Cotton, Bias-Cut.

Federal Standards:

Fed. Std. No. 123—Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, and Standards, and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, Los Angeles, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, and Standards, from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-B-17757—Boxes, Fiber, Corrugated (Modular Sizes).

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to suppliers (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 Material.

3.2.1 Leather. The leather shall be cattlehide flesh splits conforming to type III, class 2 of KK-L-162, except that staining, cracking and elongation requirements do not apply.

3.2.1.1 Thickness. The thickness of leather parts of the gloves shall be as follows, except that the thickness of the welting for both the men's and women's gloves shall be not less than 1½ ounces nor more than 2 ounces (see 4.2.2.2). (Note: An ounce is equivalent in thickness to 1/64 inch.)

Men's gloves (class 1).
Minimum—3 ounces.
Maximum—3½ ounces.

Women's gloves (class 2).
Minimum—2½ ounces.
Maximum—3 ounces.

3.2.1.2 Stiffness. Not less than 80 percent of the leather specimens, when tested as specified in 4.3.1, shall each have a load scale reading before and after soaking of not more than those specified below:

Leather thickness	Load scale reading (max.)	
	Before soaking	After soaking
2½ to under 3 ounces	24.0	30.0
3–3½ ounces	40.0	50.0

3.2.1.3 Color of leather. The color of all leather components shall be cream or light (pearl) gray. All leather components used in each pair of gloves shall be of the same color.

3.2.2 Cloth, cotton, flannel, canton. The flannel for the back of the gloves shall conform to the requirements of type IV class 5 cloth of CCC-C-458.

3.2.3 Flannel lining. The flannel lining for the palm, fingers, and thumb of types I and II gloves shall be a napped cotton flannel, conforming to the requirements of type IV, class 2 of CCC-C-458.

3.2.4 Knitted cotton tubing for wristlet (type II, gloves). The tubing for the wristlet shall be made of a 1 by 1 rib-knit, seamless cotton tubing. The tubing for class 1 wristlets shall weigh not less than 9 nor more than 12 yards per pound, having a width not less than 3 inches, and a minimum of 14 wales and 20 courses per inch. The tubing for class 2 wristlets shall weigh not less than 12 nor more than 14 yards per pound, having a width not less than 2¼ inches, and a minimum of 14 wales and 20 courses per inch (see 4.2.1).

3.2.5 Laminated fabric for gauntlet (type I glove). The finished fabric shall be composed of two thicknesses of unbleached cotton fabric securely laminated together. The face fabric shall be a cotton twill or drill weighing not less than 5 ounces per square yard and the back fabric shall be a cotton plain weave weighing not less than 2.5 ounces per square yard. The finished fabric shall contain not less than 14 ounces per square yard of natural rubber, synthetic rubber, or synthetic resin. The total weight of the finished fabric shall be not less than 21.5 ounces per square yard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.6 Thread. The thread for stitching and seaming shall be ticket No. 20, 4-ply; ticket No. 30, 4-ply; and ticket No. 50, 3 ply unbleached cotton thread, as indicated in table I and shall conform to type IA1 or IB1 of V-T-276.

3.2.7 Binding. The binding shall be 1 inch width bias-cut tape conforming to type I, class 1, bleached, or class 2, dyed of DDD-T-140. Also acceptable will be unbleached bias-cut binding conforming to type I of DDD-T-140, except that the minimum yarns per inch requirement shall apply only to the sum of the warp yarns per inch and filling yarns per inch. When dyed binding is used, the color shall approximate the color of the leather. The colorfastness requirements of DDD-T-140 shall not apply.

3.2.8 Label. Each glove shall be marked with a combination size and identification label conforming to type III or IV, class 4 of DDD-L-20. The size shall be represented by "M" for Men's and "W" for Women's. The label shall show good fastness to laundering as specified in DDD-L-20. The label shall include the information required by the applicable products labeling act and the supplier's registration number.

3.3 Design. The gloves shall be a Gunn cut pattern, leather palm with canton flannel back. Type I shall have a gauntlet and type II shall have a knitted wristlet (see figure 1).

3.4 Patterns. The dies or patterns for cutting all parts of the gloves shall be furnished by the supplier and shall be of the proper proportions to provide good fitting gloves conforming to finished measurements in table II.

3.5 Figure. Figure 1 is furnished for information purposes only.

3.6 Construction.

3.6.1 Manufacturing operations requirements. The gloves shall be manufactured in accordance with the operation requirements specified in table I. The supplier is not required to follow the exact sequence of operations.

3.6.1.1 Stitches, seams and stitchings. Stitches, seams and stitching types specified in table I shall conform to Fed. Std. No. 751. Whenever two or more methods, seams, or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper thread shall be on the inside of the gloves.

3.6.1.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6.1.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than ½ inch. Both ends of all seams and stitching produced with 401 stitch type, when not caught in other seams or stitching, shall have a ½ to ¾ inch chain extending beyond each end. Thread breaks (all stitch types) shall be secured by stitching back of break not less than ½ inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.6.2 Cutting. The leather shall be block or clicker cut. The leather components shall consist of 8 pieces as follows:

(1) Palm, front of index and small finger, underside of thumb and (reinforcement piece for type I glove) (1 piece).
(2) Top of thumb (1 piece).
(3) Front of middle and ring fingers (1 piece).
(4) One strip of welting for insertion along base of middle and ring fingers (1 piece).
(5) Four tips for back of fingers (4 pieces).

3.7 Measurements. The finished gloves shall conform to the measurements specified in table II.

3.8 Workmanship. The finished gloves shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

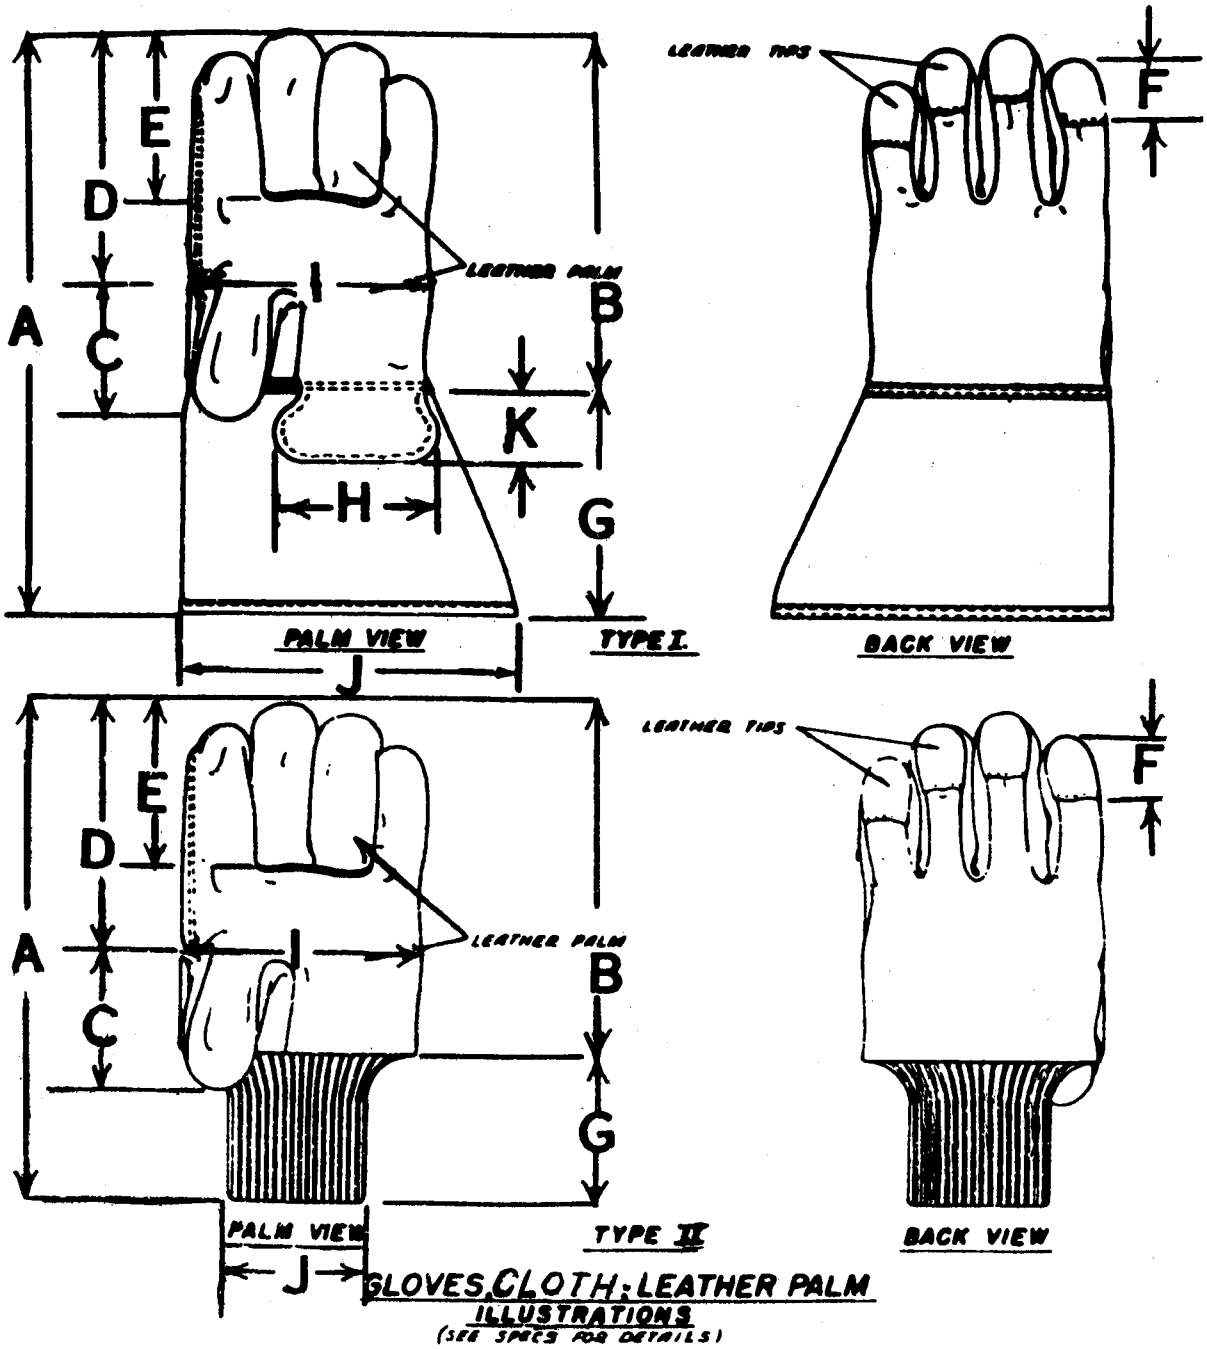


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
1.	Join fourchettes to palm.					
	Join leather fourchettes to palm inseaming with one row of stitching, 1/8- to 3/16-inch gage. The leather welting strip is to be securely caught in the seaming at base of second and third fingers. The finished welt shall measure not less than 1/16 nor more than 3/16 inch from the fourchette stitching. The ends of the welt shall be 3/8 ± 1/8 inch from the closing seam. At supplier's option the welting may be positioned by basting prior to stitching.	301	SSa-1	8-10	20-4	20-4
		or				
		401	SSa-1	8-10	20-4	30-4
2.	Join thumb to palm.					
	The leather thumb piece shall be inseam sewn to the leather palm with one row of stitching 1/8- to 3/16-inch gage.	301	SSa-1	8-10	20-4	20-4
		or				
		401	SSa-1	8-10	20-4	30-4
3.	Attach flannel lining.					
	The leather palm, front and back of thumb, and fingers are to be lined with flannel, as specified in 3.2.3, securely caught in entire length of closing side seam, the cuff joining seams, thumb and palm joining seams, and tacked at the tips of fingers.	301	SSa-1	8-10	20-4	20-4
		or				
		401	SSa-1	8-10	20-4	30-4
4.	Join palm to back.					
	Join the leather on thumb side to canton flannel with lapped seam by a double row of stitching 1/16- to 3/16-inch gage.	301	LSa-2	8-10	20-4	20-4
		or				
		401	LSa-2	8-10	20-4	30-4
5.	Attach leather finger tips.					
	The leather tips shall be stitched to canton flannel across the back of each finger 1 1/4 ± 1/8 inches down from tip of finger with one row of stitching 1/16- to 3/16-inch gage and caught in the closing seams.	301	LSa-1	8-10	20-4	20-4
		or				
		401	LSa-1	8-10	20-4	30-4
6.	Closing.					
	The closing shall be full inseamed, 1/8- to 3/16-inch from cut edge.	301	SSa-1	8-10	20-4	20-4
		or				
		401	SSa-1	8-10	20-4	30-4
7.	Attaching reinforcement piece.					
	The leather reinforcement piece shall be stitched to the front (palm side) of the gauntlet with one row of stitching around the sides and top edge, 1/16- to 3/16-inch gage and caught in seam joining cuff gauntlet to hand portion.	301	SSa-1	8-10	20-4	20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements (Cont'd)

No.	Manufacturing operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
8.	Type I, Styles A & B (Gauntlet cuff)					
	(a) The gauntlet, made of laminated cotton fabrics, shall be attached to top of hand at wrist by a double row of stitching.	301	LSa–2	8–10	20–4	20–4
		or 401	LSa–2	8–10	20–4	30–4
	(b) The bottom edge (edge attached at wrist) of gauntlet shall be bound with cotton binding and the binding turned under 3/16 to 1/4 inch on the outside.	301	BSb–1	8–10	30–4	30–4
		or 401	BSb–1	8–10	30–4	50–3
	(c) Bind top edge (edge at open end of glove) of gauntlet cuff with raw edges of binding turned in 3/16 to 1/4 inch and caught within the seaming.	301	BSc–1	8–10	30–4	30–4
		or 401	BSc–1	8–10	30–4	50–3
9.	Type II.—(Knitted wristlet)					
	The knitted cotton tubing shall be cut a sufficient length to permit the wristlet to be formed double thickness by folding over and inseaming the bottom edge of wristlet to top of hand portion at wrist with a double row of stitching 1/8 to 3/16 inch between rows with 1/4- to 3/8-inch seam allowance.	301	SSa–2	8–10	20–4	30–4
		or 401	SSa–2	8–10	20–4	30–4
10.	Label.					
	Apply label to back outside of cuff of type I glove and on back outside of hand part of type II glove.					
11.	Forming.					
	All gloves shall be formed on heated forms. Thumbs and seams shall be worked out over the forms.					
12.	Pairing.					
	Match and pair gloves. Tack each pair of gloves together with not less than 2 stitches using a cord thread which will permit the pair to be pulled apart without tearing the fabric. As an alternate, only type I gloves may be tacked with a soft metal staple provided the gloves can be separated without damaging the fabric. Type I gloves shall be tacked at closing seam of gauntlet, 1/2 to 1 inch from top of gloves. Type II gloves shall be tacked 1 1/4 to 1 1/2 inches from edge of knitted cuff and 1/2 to 1 inch from top of gloves.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Measurements[1]

Location	Type				Tolerance
	I Class 1		II Class 1	II Class 2	plus or minus
	Style A and D	Style B and C			
	Inches	Inches	Inches	Inches	Inch
A Over-all length, tip of 2nd finger to top of cuff	12½	10	10¼	10	½
B Hand length, top of 2nd finger to wrist seam	7½	7½	7½	7¼	¼
C Length of thumb, crotch to tip	3⅛	3⅛	3⅛	2¾	⅛
D Reach, base of thumb to tip of 2nd finger	5½	5½	5½	5⅛	½
E Length of 2nd finger, crotch to tip Length of other fingers in proportion	3½	3½	3½	3¼	⅛
F Length of tips on back	1¼	1¼	1¼	1¼	⅛
G Length of cuff, top to wrist seam	5	2½	2¾	2¾	¼
H Width of pull tab on cuff	3¼	3¼	--	--	½
I Width of glove at thumb	5¼	5¼	5¼	4½	¼
J Width of cuff, top opening	7	6½	3¼	2½	¼
K Depth of reinforcement piece	1¾	1¾	--	--	¼
L Width Knuckle reinforcement (Style C and D only)	1-3/4	1-3/4	--	--	1/4

[1] See figure 1.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of Compliance. Where Certificates of Compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Inspection shall be in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components as specified in 4.2.1.1 and 4.2.1.2.

4.2.1.1 Leather testing. In addition to the quality assurance provisions of applicable subsidiary specifications and standards, the leather shall be tested for stiffness in accordance with 4.3.1. The sampling procedure and location from which the sample unit is to be obtained shall be in accordance with KK-L-162 as applicable. The lot shall be rejected if more than three test failures occur for this characteristic. This requirement is applicable to sample unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.1.2 Fabric testing. The fabrics shall be tested for the characteristics in table III and tests shall be in accordance with CCC-T-191, wherever applicable. Testing for all requirements listed in table III are applicable to the sample unit. The sample size shall be as follows:

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any requirements specified.

TABLE III. Fabric component tests

Component	Characteristic	Requirement reference	Test method
Cotton rib knit (cuff fabric)	Material identification	3.2.4	1200 [1]
For type II glove only	Type of knit	3.2.4	Visual [1]
	Weight (Yards per lb.)	3.2.4	5041
	Wales per inch	3.2.4	5070 [1]
	Courses per inch	3.2.4	5070 [1]
	Width (flat)	3.2.4	5020
Laminated fabric: (For type I only)			
Face fabric	Material identification	3.2.5	1200 [1]
	Weight (oz. per sq. yd.)	3.2.5	5041 [1]
	Weave	3.2.5	Visual
Backing fabric	Material identification	3.2.5	1200 [1]
	Weight (oz. per sq. yd.)	3.2.5	5041 [1]
	Weave	3.2.5	Visual
Finished laminated fabric	Total weight	3.2.5	5041

[1] A supplier's certificate of compliance will be acceptable for this characteristic.

4.2.2 Inspection of end item.

4.2.2.1 Examination of the end item. The gloves shall be examined for defects listed in table IV. The sample unit shall be one glove and selection shall be by pairs. The sample unit for pairing defects shall be one pair. Defects of pairing shall be classified as a single defect. The sample size shall be in accordance with inspection level II and the AQL shall be 4.0 major and 10.0 total (major and minor combined) defects per hundred units. The lot size shall be expressed in units of one glove each.

TABLE IV. Classification of visual examination defects

Examine	Defects	Classification	
		Major	Minor
Pairing	Not properly mated, e.g., not right and left of the same size	X	
	Badly shaded, wide variation in color		X
	Not tacked together or not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of visual examination defects (Cont'd)

Examine	Defects	Classification	
		Major	Minor
Cleanliness	Any spot, stain or foreign matter		X
Color	Not as specified in color		X
	Color not uniform		X
Type	Not type glove specified	X	
Leather	Not split cattlehide leather		X
	Loose, spongy, flanky, open cut or open scratch:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Open vein:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Any hole, except pinhole, cut or tear	X	
	Three or more pinholes in a glove		X
	Not soft or pliable	X	
	Any scar, brittle, or bony area, abraded area		X
Knitted cotton tubing (type II)	Any hole, cut, tear, dropped stitch, or run:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Slubby yarn		X
	Any thin area or mend		X
	Not seamless	X	
Laminated fabric (type I)	Any cut, hole, tear, burn:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Any evidence of delamination		X
	Any slub, or wrinkle		X
Flannel fabric	Any hole, cut, tear, or rip:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X
	Not napped		X
	Broken or missing yarn, open place clearly visible		X
Construction and workmanship, general (applicable to all components unless otherwise indicated herein)	Any component omitted, misplaced, or operation omitted:		
	Seriously affecting serviceability, e.g., fingers badly twisted or distorted	X	
	Affecting serviceability, but not seriously		X
	Needle chew	X	
	Not assembled as specified:		
	Seriously affecting serviceability	X	
	Affecting serviceability, but not seriously		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of visual examination defects (Cont'd)

Examine	Defects	Classification	
		Major	Minor
Seams and stitching	Any open seam (see note)		
	Note.—When one or more stitches are broken or two or more consecutive skipped stitches or run-offs occur on a single stitched seam or on both rows of stitching on a double stitched seam, it shall be classified as a major defect.		
	When one or more stitches are broken or two or more continuous skipped stitches or run-offs occur on only one row of a double stitched seam, it shall be classified as a minor defect.		
	Looper thread exposed on outside of glove when 401 stitch type is used		X
	Not specified seam or stitch type	X	
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight tension resulting in cutting of leather or breaking of stitches when normal pull is applied	X	
	Any row of stitching omitted	X	
	One or two stitches per inch less than specified		X
	Three or more stitches per inch less than specified	X	
	More than the specified number of stitches per inch, but not damaging material		X
	More than the specified number of stitches per inch damaging material	X	
	Gauge of stitching irregular or not as specified		X
	End of seam or stitching (stitch type 301) when not caught in other seam or stitching, backtacked less than ½ inch		X
	End of seam produced with 401 stitch type when not caught in other seam or stitching, having chain extending less than ½ inch or more than ¾ inch beyond each end		X
	End of seam produced with 401 stitch type when not caught in other seam or stitching, not having chain extend beyond each end	X	
Welting	Not securely caught in seam	X	
	Width not uniform or does not protrude a uniform distance from seam		X
Fit of parts	Any part or assembly not properly affixed:		
	Seriously affecting serviceability e.g., flannel lining wrinkled or excessive bulk in crotch of fingers	X	
	Affecting serviceability, but not seriously		X
Reinforcement piece	Reinforcement piece not stitched around sides and top edge	X	
Knitted wristlet	Not double thickness of material	X	
Finishing	Loose threads not trimmed throughout glove		X
	Not neatly laid off, i.e., glove is wrinkled or does not otherwise present a neat appearance		X
Markings	Missing, incomplete, incorrect, not legible, not specified type or size, not in proper location or not accomplished in the specified manner		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. The gloves shall be examined for dimensional defects, including thickness of leather. Any dimension not within the specified tolerance shall be classified a defect. The sample size shall be in accordance with inspection level S-3 and the AQL shall be 4.0 defects per hundred units. The sample unit shall be one glove. The lot size shall be expressed in units of one glove.

NOTE: Each leather part of the glove shall be checked for thickness, i.e., thumb, body of glove, fourchettes and welts (where feasible). Any of these parts that are not within the required thickness range shall constitute a defect. Thickness shall be determined in accordance with method 1011 of KK-L-311.

4.2.3 Inspection for preparation for delivery. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table V. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE V. Examination of preparation for delivery

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, improper taping and inadequate stapling.
	Bulged or distorted container.
Content	Number of bundles per container is more or less than required.
	Number of pairs of gloves per bundle is more or less than required.[1]

[1] For this defect, two bundles shall be examined from each shipping container in the sample.

4.3 Tests.

4.3.1 Stiffness.

4.3.1.1 Before soaking. The specimen shall be 3 by 4 inches, cut with the long dimension perpendicular to the backbone. The specimen shall be folded in half, grain side out (when applicable) to form a rectangle 3 by 2 inches (crease parallel to backbone), then carefully folded in half again to form a rectangle approximately 3 by 1 inch, 4 layers thick. The folded specimen shall be secured with staples across the width, ¼ inch from each end. The ends shall be gripped between thumb and forefinger and the specimen shall be twisted torquewise 40 times back and forth approximating an angle of 180 degrees in each direction. One end of the specimen shall then be fastened in the vise of the tester in such a way that the cut edges on the upper side face outward from the machine. The other end of the specimen shall extend 2 inches from the vise. The stiffness of the specimen shall be determined as specified in Method 4211 of KK-L-311 by bending the specimen 20 degrees, using a 1 inch span and a total moment weight equivalent to 0.5 inch-pound. The stiffness shall be recorded as the load scale reading and shall be recorded to the nearest full division.

4.3.1.2 After soaking. The folded and stapled specimens which pass the requirement applicable to 4.3.1.1 shall then be immersed in distilled water of 140° ± 5°F. (60° ± 3° C.) for 20 ± 2 hours; 1000 ml. of water shall be used for 15 specimens. Complete immersion of the specimen shall be accomplished by placing a floating cover on the vessel used for immersion. The specimens shall be removed, air dried and conditioned for 72 hours in the standard atmosphere specified in KK-L-311, and tested for stiffness in folded and stapled condition in accordance with the preparation and test method described in 4.3.1.1.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Five pairs of gloves of like description only, shall be neatly stacked in a bundle with every other pair reversed end for end. Each bundle shall be secured at each end with cotton tape or twine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Gloves shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. One hundred and twenty pairs of gloves of like description only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class, weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard used in fabricating the box liner shall be grade V3c. Level A packages shall be packed flat and neatly arranged to form a balanced pack, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2 Level B. One hundred and twenty pairs of gloves of like description only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class, domestic, size 3A of MIL-B-17757. The fiberboard for the box and liner shall be grade 275. Level A packages shall be packed flat, neatly arranged to form a balanced pack within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.2.1 When specified, shipping containers shall be fabricated from V3c or V3s fiberboard (see 6.2).

5.2.3 Level C. Gloves, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirement. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The gloves covered by this specification are primarily work gloves for use by personnel of the Military services and civil Government agencies.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Type, class, and style required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Whether V-board containers are required for level B shipments (see 5.2.2.1).
(e) Options required by civil agencies.

6.3 Sample. For access to the guide sample, address the procurement office issuing the invitation for bids.

6.4 For civil agencies. Level A for packaging and level B for packing should be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to ultimate consumers.

MILITARY CUSTODIANS:
Army—GL
Navy—YD
Review activities:
Army—MD
Navy—YD
User activities:
Navy—MC, CG

Preparing activity:
Army—GL
Civil Agencies Interest:
JUS-FPI
AGS
HEW
INT
VA-DMS
COM-NBS
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Gloves, Cloth, Leather Palm = JJ-G-451e

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

"to attach this form cut along this line"

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.