KK-B-151H
February 9, 1977
SUPERSEDING
Fed. Spec. KK-B-151G
May 13, 1971

FEDERAL SPECIFICATION

BELT, LINEMAN'S; AND STRAP, POLE LINEMAN'S TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a nylon lineman's belt and a nylon pole strap.

1.2 Classification.

1.2.1 Type. The belt and strap shall be of the following types, as specified (see 6.2):

Type I - Lineman's belt.
Type 11 - Lineman's pole strap.

1.2.2 Sizes.

1.2.2.1 Type I belts shall be furnished in the following sizes, as specified (see 6.2):

Sizes :
34 - Approximate 34-inch waist, D size 19.
36 - Approximate 36-inch waist, D size 20.
38 - Approximate 38-inch waist, D size 21.
40 - Approximate 40-inch waist, D size 22.
42 - Approximate 42-inch waist, D size 23.
44 - Approximate 44-inch waist, D size 24.
46 - Approximate 46-inch waist, D size 26.
48 - Approximate 48-inch waist, D size 28.

1.2.2.2 Type II strap shall be 84 inches in length.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies) .

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, Mo, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle WA.

(Federal Government activities may obtain copies. of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Drawing:

AF43B26561 - Snap Assembly parachute Connector, Locking Type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications, Standards, drawing, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) :

A143 - Safeguarding Against Embrittlement of Hot Galvanized Structural Steel Products and Procedures for Detecting Embrittlement, Recommended Practice for.
A153 - Zinc Coating (Hot Dip) on Iron and Steel Hardware.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19.103.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3* REQUIREMENTS

3.1 First article. when specified (see 6.2), the contractor shall furnish a belt and strap for first article inspection and approval (see 4.2.1).

3.2 Material. All material shall be new and unused and shall be as specified herein. Material not specified shall be of the same quality used for the intended purpose in commercial practice. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual component or the overall assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.3 Design. The lineman's belt and pole strap covered by this specification shall be commercial, off-the-shelf items conforming to industrial standards and of configurations similar to figures 2 and 3, respectively.

3.3.1 Type I lineman's belt. The type I lineman's belt shall consist primarily of a body pad, "D" ring strap, waist strap, and tool imps.

3.3.1.1 Body pad. The body pad backing shall be harness leather, nylon fabric, or webbing of plied construction, and of a color furnished commercially by the manufacturer. The nylon fabric or webbing shall be impregnated with neoprene. The body side shall be lined with chrome leather, or a synthetic of proven equal or superior strength and durability, having rolled edges, and no exposed rivets. The body pad shall have a width not less than 4-1/2 inches and a length not less than the "D" size plus the "D" rings. If circle "D" rings are used, the "D" rings may extend beyond the body pad a maximum of 1 inch on each end.

3.3.1.1.1 Integral tabs. When specified (see 6.2), the body pad shall be provided with two integral tabs for the attachment of tool carriers, one on the left side and one on the right side.

3.3.1.2 "D" ring strap. Unless otherwise specified (see 6.2), the "D" ring strap shall be made of plied nylon cloth or webbing and shall be neoprene impregnated. The individual plies shall be folded so that no cut edges are exposed, and shall be impregnated and vulcanized so that the plies are not readily separable except by chemical means. The strap shall have minimum cross-sectional dimensions of 5/32 inch by 1-3/4 inch. The "D" ring strap shall be centrally fastened to the body pad by rivets, stitches, or both.

3.3.1.2.1 Circle "D" rings. Circle "D" rings shall be similar to those in figure 1, shall be made of forged steel, and shall be either cadmium or zinc plated. One "D" ring shall be secured to each end of the "D" ring strap with a suitable metal safety liner used between the "D" ring bar and the fabric enclosing it to prevent wear of the strap fabric. The "D" rings shall have no sharp edges.

3.3.1.3 Waist strap. The waist strap shall be made of plied neoprene-impregnated nylon cloth, and shall be secured to the body pad "D" ring strap assembly by a loop or loops. Cross-sectional dimensions of waist strap shall be not less than 3/32 inch by 1-1/2 inch. The length from the buckle end to the center adjustment hole of the other end of belt shall equal the waist size designation of the belt specified. Four additional adjustment holes on l-inch centers on both sides of the center adjustment hole shall be provided to permit a total adjustment of 8 inches. The adjustment holes shall be of a size that will prevent accidental disengagement of the buckle tongue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.3.1.3.1 Buckle. Body strap buckle frames shall be fabricated of a forging quality of steel by the forge process. A galvanized coating shall be applied to the buckles in accordance with ASTM A153 or cadmium in accordance with ASTM A143. The necessary precautions to prevent embrittlement shall be taken in accordance with ASTM A143. The buckles shall be free from any defects. They shall be left reasonably smooth and no sharp edges will be permitted. Hardness shall be limited to a maximum of 42 on the Rockwell "CT" scale to insure maximum toughness of the hardware, and shall have a minimum tensile strength of 2,000 pounds (lb) without permanent deformation of more than 1/64 inch.

3.3.1.3.2 Keeper. A suitable keeper shall be affixed to the buckle end of the belt strap to retain the strap overlap extending from the buckle.

3.3.1.3.3 Suspension "D" rings. When specified (see 6.2), four "D" rings shall be attached at appropriate locations for attaching to a suspender or belt type supporter.

3.3.1.4 Tool loops. The tool loops shall be made of leather or plied, neoprene-impregnated nylon cloth, riveted to the belt strap. The cross-sectional dimensions of the tool loops shall be no less than 1/8 inch by 1 inch. Unless otherwise specified (see 6.2), the length shall be adequate for forming four 1-1/8 inch diameter tool loops with no loops in the center.

3.3.1.5 Accessories. Unless otherwise specified (see 6.2), a tape thong, a glove bag ring, and a knife snap shall be attached to the belt strap at points of attachment of the tool loops.

3.3.2 Type II lineman's pole strap. The type II lineman's pole strap shall be similar to that in figure 3 and shall consist of a strap, two safety snaps, and a buckle. The nominal length between the snap stirrups shall be 84 inches when adjusted to its longest length.

3.3.2.1 Strap. The strap shall be made from nylon fabric of not less than 6 ply instruction, impregnated with neoprene with contrasting color inner plies. The plies shall be folded so that no cut edges are exposed and shall be impregnated and vulcanized so that the plies are not readily separable except by chemical means. The straps shall contain not less than eleven adjustment holes on not more than 6-inch centers when tongue buckle is used. A nonslip friction buckle may be used in lieu of tongue buckles for strap length adjustment. The minimum cross-sectional dimensions shall be 5/32 inch by 1-3/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.3.2.2 Strap buckle and snaps. Safety strap buckle frames shall be fabricated of a forging quality of steel by the forge process. A galvanized coating shall be applied to the buckles in accordance with ASTM A153 or cadmium in accordance with ASTM A143. The necessary precautions to prevent embrittlement shall be taken in accordance with ASTM A143. The buckles shall be free from any defects. They shall be left reasonably smooth and no sharp edges will be permitted. Hardness shall be limited to a maximum of 42 on the Rockwell "C" scale to insure maximum toughness of the hardware, and shall have a minimum tensile strength of 2,000 lb without permanent deformation of more than 1/64 inch.

3.3.2.2.1 Snaps. The body of the snap shall be forged of a forging quality steel. The snap hook as assembled will consist of body, keeper, spring and roller, and shall be adjusted to work smoothly. It shall snap over the curved portion of the "D" ring from any angle without interference *or* tendency to bind at any point. The nose of the snap shall be round (see figure 1) and overlap the keeper latch by 3/16 inch minimum in such a manner as to prevent the latch from engaging with the "D" ring and accidentally releasing same. The spring tension for the keeper shall be such that the keeper will not begin to open with a weight of 2.5 lb and will begin to open with a weight of 4 lb with the weight supported on the keeper against the end of the nose. A galvanized coating shall be applied to the snaps in accordance with ASTM A153 or cadmium coating in accordance with ASTM A143. The necessary precautions to prevent embrittlement shall be taken in accordance with ASTM A143. Parts shall be free from any defects, left reasonably smooth, and no sharp edges will be permitted. Each finished snap hook shall be capable of supporting without failure a load of 5,000 lb. Failure of snap hook will be distortion sufficient to release the keeper. The load shall be applied at the eye of the hook and at the roller. The snap shall be held at the roller end by means of a steel loop or band the full width of the roller. The keeper shall be capable of withstanding 750 lb of applied side pressure. Hardness shall be limited to a maximum of 42 on the Rockwell "C" scale to insure maximum toughness of the hardware. When specified (see 6.2), for Air Force procurement a snap assembly conforming to Drawing AF43B26561 will be provided.

3.3.3 Miscellaneous components. Miscellaneous components shall consist of two metal clips used to envelop and secure the strap ends around the snap roller and buckle frame and a keeper to retain the strap together on the looped end. The metal clips shall be assembled over the fabric with rivets.

3.4 Tension strength. Each belt and strap shall be capable of withstanding the drop test as stated in 4.6.1 without showing signs of tearing, cracking, fracturing, or becoming distorted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.5 Maintenance instructions. The manufacturer shall provide instructions for the care of the belt and strap.

3.6 Marking. Each body belt and strap shall have a metal marker attached on which the manufacturer's name, the month and year of manufacture, and the manufacturer's model number shall be permanently stamped.

3.7 Workmanship. The quality of workmanship shall be such as to produce belts and straps that meet the requirements of this specification and ensure proper functioning of all parts of the unit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.2.1).
(b) Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. First article inspection shall be performed on one belt and strap when a first article sample is required (see 3.1). This inspection shall include the examination of 4.5 and the tests of 4.6. The first article may be a standard production item from the supplier's current inventory provided the belt and strap meets the requirements of this specification and is representative of the design, construction, and manufacturing technique applicable to the remaining belts and straps to be furnished under the contract.

4.2.2 Quality conformance inspection. Quality conformance inspection shall be performed on the sample belts and straps selected in accordance with 4.4. This inspection shall include the examination of 4.5 and the tests of 4.6.

4.3 Inspection lot. All units of the same type and size offered to the Government at the same time shall be considered a lot for the purpose of inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.4 Sampling. A random sample of belts and straps shall be selected from. each lot in accordance with MIL-STD-105.

4 .4.1 Sampling for examination. Examination of the belt and strap shall be based on inspection level II and an Acceptable Quality Level (AQL) of 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.4.2 Sampling for tests. Tests of the belts and straps shall be based on inspection level S-2 and an AQL of 2.5 percent defective.

4.5 Examination. Each sample selected in accordance with 4.4.1 shall be examined for defects as classified in table I. This inspection shall encompass all visual examination and dimensional measurements.

TABLE I. Classification of examination defects

Defect	Major	Minor
Design not as shown in figures 2 or 3.	x	
Material not as specified.	x	
Dimensions not as specified.	x	
Body pad not cushioned or has exposed rivets.	x	
Components missing, loose, cracked, broken, or distorted.	x	
Delamination of nylon plies.	x	
Plating not as specified.		x
Belt adjustment holes excessively large for buckle tongue, or not quantity or spacing as specified.		x
Broken stitches or poor riveting of “D” ring or pole strap.	x	
Broken stitches or poor riveting of other than “D” ring or pole strap.		
Marking not as specified.		
Blemished material.		

4.6 Tests. Each sample selected in accordance with 4.4.2 shall be tested to determine compliance with this specification. Tests shall be conducted as specified in 4.6.1.

4.6.1 Drop test. Each sample of belts and straps shall be tested as follows:

4.6.1.1 Safety strap or lanyard attachment. Attach one end of the safety strap or lanyard to a rigid support, the other end shall be attached to a 250-lb canvas bag of sand.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.6.1.2 Safety strap *or* lanyard impact loading. Allow the 250-lb canvas bag of sand to free fall 4 feet for (safety strap test) and 6 feet for (lanyard test) ; in each case stopping the fall of the 250-lb bag. Failure of the strap or lanyard shall be indicated by any breakage, or slippage sufficient to permit the bag to fall free of the strap or lanyard.

4.6.1.3 Body belt impact loading. The entire body belt assembly shall be tested using one "D" ring. A safety strap or lanyard shall be used that is capable of passing the impact loading test in 4.6.1.2 and attached as 'required in 4.6.1.1. The body belt shall be secured to the 250-lb bag of sand at a point to simulate the waist of a man and allowed to drop as stated in 4.6.1.2. Failure of the body belt shall be indicated by any breakage, or slippage sufficient to permit the bag to fall free of the belt.

4.7 Inspection of preparation for delivery. An inspection shall be made to determine that the packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with MIL-STD-105. For examination of interior packaging and marking, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Shipping containers fully prepared for delivery shall be examined for defects. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2, with an AQL of 4.0 percent defects per hundred units. Classification of preparation for delivery defects shall be as shown in table II.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Containers	Unit packages and shipping containers not as specified.
Quantity	Quantity in unit package not as specified. Quantity in level B shipping container for civil agencies not as specified (see 5.2.2.2).
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size; location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Each complete belt or strap shall be packaged in a close-fitting box conforming to PPP-B-636, class weather-resistant. The contents shall be cushioned to prevent movement. The box shall be closed and sealed in accordance with method V of the appendix to the box specification.

5.1.2 Level B. Each complete belt or strap shall be packaged as specified in 5.1.1for level A except the fiberboard box shall be class domestic, and waterproof sealing of the box is not required.

5.1.3 Level C. The belts or straps shall be packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The packaged belts or straps of identical type and size shall be packed in boxes conforming to PPP-B-601, overseas type. Strapping shall be class 1, type I, finish A or B.

5.2.2 Level B.

5.2.2.1 Military agencies. The packaged belts or straps of identical type and size shall be packed in close-fitting boxes conforming to PPP-B-601, domestic type; PPP-B-636, V3c or V3s; or PPP-B-640, class 2. The gross weight or size of each box shall not exceed the-limitations of the applicable box specification. When specified (see-6.2), fiber-board boxes conforming to PPP-B-636 shall be class domestic.

5.2.2.2 Civil agencies. Twelve packaged belts or straps shall be packed in a close-fitting fiberboard box conforming to PPP-B-636, class domestic, style RSC.

5.2.3 Level C. The packaged belts or straps shall be packed in a manner which will insure arrival at destination in satisfactory condition and which will be acceptable to the carrier at lowest rates. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2, as specified (see 6.2) .

5.3.1 Civil agencies. In addition to any special marking required by the contract, packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract, packages, and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The lineman's belt and pole strap covered by this specification are intended for use by linemen or electricians in the installation or repair of transmission, distribution, or communication lines.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents :

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).
(c) Size required (see 1.2.2.1).
(d) First article, if required for inspection and approval (see 3.1, 4.2.1, and 6.3).
(e) When integral tabs are required (see 3.3.1.1.1).
(f) Material of "D" ring strap, when different (see 3.3.1.2).
(g) When suspension "D" rings are required (see 3.3.1.3.3).
(h) Length of tool loop, when different (see 3.3.1.4).
(i) Accessories, when different (see 3.3.1.5).
(j) When special snap assemblies are required (see 3.3.2.2.1).
(k) Level of packaging and level of packing required (see 5.1 and 5.2). Level B packaging is intended to provide economical but limited protection and should be specified only when it is determined that the belts or straps will be held in covered storage.
(l) When class domestic fiberboard boxes are to be used for level B packing (see 5.2.2.1).
(m) Marking required (see 5.3) .


6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulation (ASPR). The first article should be a preproduction sample or may be a sample selected from the first production run. The first article should consist of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.


one complete belt and strap. The contracting officer should include specific instructions in all procurement instruments regarding arrangement for examination, test, and approval of the first article.

6.4 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of paragraph 7-104.9(n) of the ASPR, the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of ASPR 7-104.(n) are not invoked, the data shall be delivered in accordance with the contract requirements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

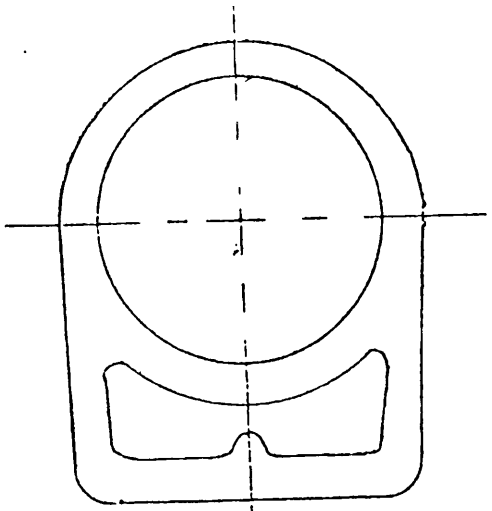


"D" RING



BUCKLE ASSEMBLY

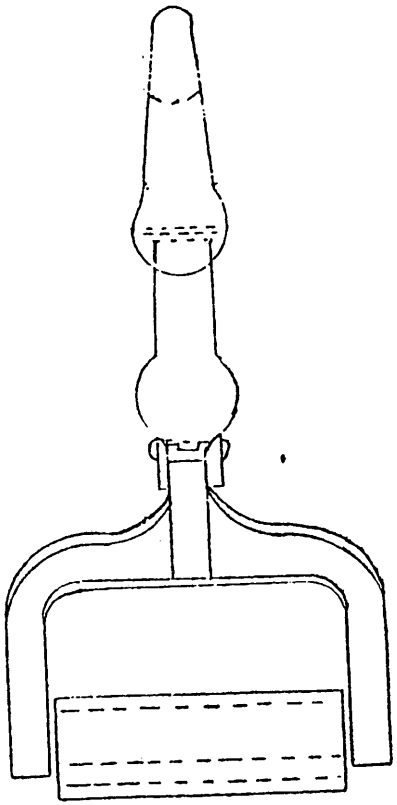

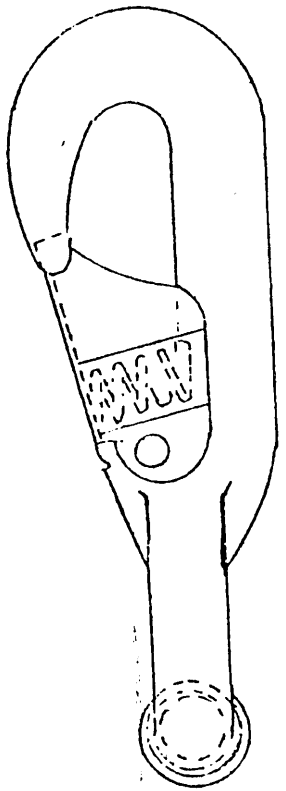


SNAP HOOK


Figure 1.

This drawing is furnished only to amplify the specification text, and is not to be considered restrictive as to specific design details by either bidder or inspectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

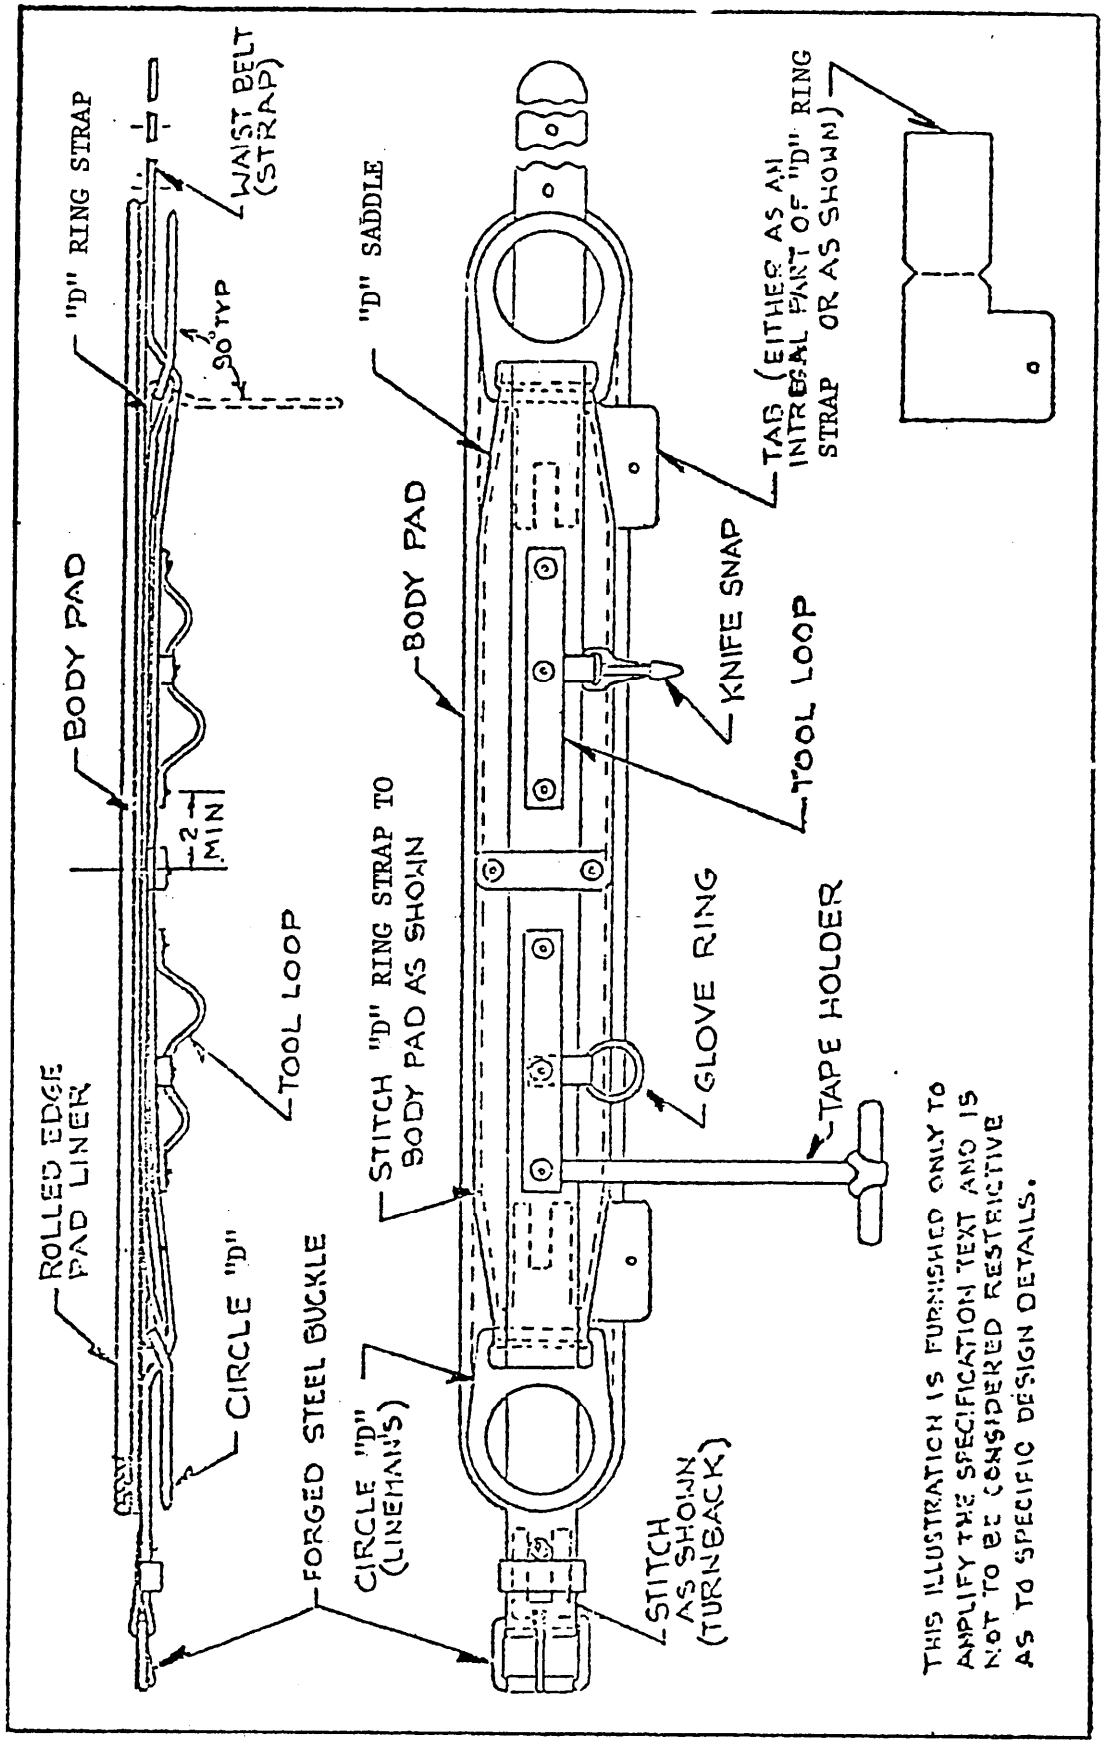

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the currentversion before use.

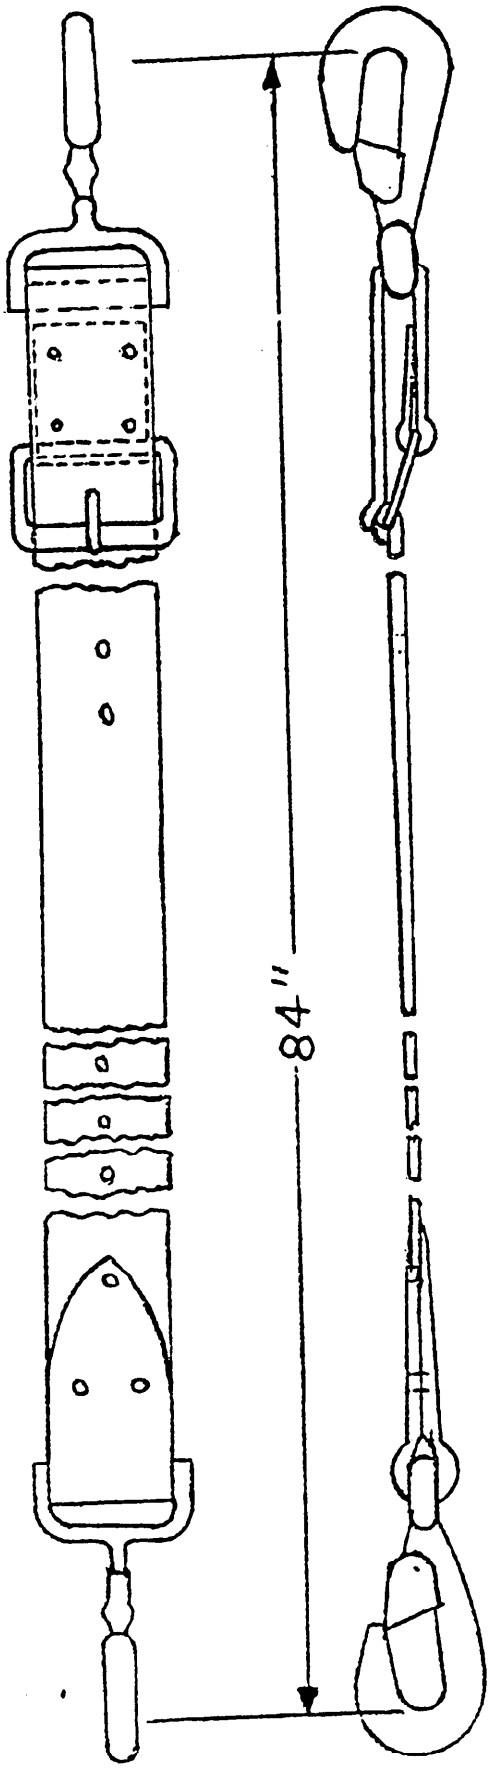

POLE STRAP

Figure 3.

This drawing is furnished only to amplify the specification text, and is not to be considered restrictive as to specific design details by either bidder or inspectors, as a nonslip friction buckle may be used.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the currentversion before use.

MILITARY INTEREST:

Custodians :

Army - EA
Navy - YD
Air Force - 99

Review activities:

Army - EL, ME
Navy - MC
Air Force - 11

User activity:

Navy - CG

Civil Agency Coordinating Activities:

GSA - FSS
INT - BPA
TVA

Preparing activity:

Navy - YD

Project No. 4240-0440

Orders for this publication are to be placed with General Services Administration, acting as agent for the Superintendent of Documents. See section 2 of this specification to obtain copies of documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

KK-B-151H
AMENDMENT-2
June 4, 1982
SUPERSEDING
Amendment-1
February 23, 1979

FEDERAL SPECIFICATION

BELT, LINEMAN'S; AND STRAP, POLE LINEMAN'S TYPE

This amendment, which forms a part of Federal Specification KK-B-151H, dated February 9, 1977, was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

PAGE 2

Paragraph 2.1, add Military Specification:

MIL-W-27265 - Webbing, Textile, Woven Nylon, Impregnated.

PAGE 3

Paragraph 2.2, delete ASTM A143 and A153 in their entirety.

PAGE 4

Paragraph 3.3.1.2, line 3, delete "neoprene impregnated" and substitute "either treated with polyvinyl butyral in accordance with MIL-W-27265, class R or neoprene impregnated."

Paragraph 3.3.1.2, line 6, delete "5/32" and substitute "3/32."

Paragraph 3.3.1.3, line 6, after "waist size designation" add "+ 1/2 inch."

PAGE 5

Paragraph 3.3.1.3.1, lines 2 through 5, delete second and third sentences and substitute: "The buckles shall be either cadmium of zinc coated."

PAGE 6

Paragraph 3.3.2.2, lines 2 through 6, delete second and third sentences and substitute: "The buckles shall be either cadmium or zinc coated."

Paragraph 3.3.2.2.1, lines 11 through 14, delete sixth and seventh sentences and substitute: "The snaps shall be either cadmium or zinc coated."

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

KK-B-151H
AMENDMENT- 2

MILITARY INTEREST

Custodians

Army - EA
Navy - YD
Air Force - 99

Review Activities

Army - ER, ME
Navy - MC
Air Force - 11

User Activity

Navy - CG

CIVIL AGENCY COORDINATING ACTIVITIES;

GSA - FSS
B PA
TVA
DCG

PREPARING ACTIVITY:

Navy - YD

Project No. 4240-0495

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.