FEDERAL SPECIFICATION

GLOVES, LEATHER, GAUNTLET, LINESMEN'S AND WELDERS'

This specification was approved by the Director, Bureau of Federal Supply, for the use of all departments and establishments of the Government.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers work gloves used by linesmen and welders, but does not include protective or safety gloves in which a rubber insert is used.

1.2 Grade and types. — Leather gauntlet gloves covered by this specification shall be of one grade and of the following types, as specified:

Type I.—Linesmen's gloves (see fig. 1).
Type II.—Welders' gloves, Montpelier pattern (see fig. 2).
Type III.—Welders' gloves, Gunn pattern (see fig. 3).

1.3 Sizes.—The gloves shall be furnished in the following sizes, as specified (see table II):

Small.
Medium.
Large.
Extra large.

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications, of the issues in effect on the date of invitation for bids, form a part of this specification:

V–T–276—Thread; Cotton.
K–L–311—Leather and Leather Products; General Specification (Methods of Sampling, Inspection, and Tests).
CCC–D–771—Duck, Cotton, Plied Yarns (Army, Numbered, and Tent-Duck).
CCC–T–191—Textiles; General Specifications, Test Methods.
DDD–S–751 — Stitches; Seams; and Stitching.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by postal note, money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

2.2 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.

3.1.1 *Leather.*—The leather used shall be as specified herein for the various types (see 3.8.1, 3.9.1, and 3.10.1). The leather shall be chrome-tanned, pliable, free from flesh cuts, sponginess, or other defects which may affect the serviceability. Slight salt stains, and grown-over cuts or scratches where the grain is not broken or the wearing quality of the leather is not impaired, will be permitted. When grain horsehide is used, it shall be full-grain horsehide fronts, i.e., sides with the butts trimmed off, the front shanks cut off at the knee, and the snout cut off; palms cut from cowhide shall be free from grub holes and deep wrinkes. When split cowhide is used, it shall be made from flesh split cowhide. Middle splits, head and shoulder, or belly splits shall not be used. Palms, thumbs, fingers, and backs shall be made from the best selected cuts.

3.1.1.1 *Weight of leather.*—The weight of the leather shall be not less than 2½ ounces nor more than 3½ ounces (1 ounce is equal to 1/64 inch).

3.1.1.2 *Stitch tearing strength.*—The stitch tearing strength of the leather shall be not less than 800 pounds per inch of thickness.

3.1.1.3 *Flexibility and shrinkage.* — The leather shall not lose its flexibility and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

shrinkage shall be not more than 5 percent when subjected to the test described in 4.3.2.

3.1.1.4 *Chemical requirements.*—The leather shall be fully chrome-tanned and shall conform to the requirements in table I.

TABLE I.—*Chemical requirements of glove leather.*

	Percent by weight	
	Minimum	Maximum
Chromic oxide (moisture- and grease-free basis)	3.5	—
Grease (dry basis)	10.0	20.0
Acidity (pH)	3.5	—

3.1.2 *Thread.*—Unless otherwise specified, the thread shall be 16/4 cord, unbleached cotton, conforming to the requirements for type IA1 of Federal Specification V–T–276.

3.1.3 *Gauntlet cuff facing.*—The gauntlet cuff facing shall be cotton duck conforming to the requirements for type I, number 8, hard-texture numbered duck described in Federal Specification CCC–D–771.

3.1.4 *Back lining.*—The back lining in type II and type III gloves shall be a knitted wool/cotton plaited fabric. The face yarn shall be woolen spun yarn of 100 percent wool of not less than 50's grade (U. S. Standard) fleece or pulled wool. No reused or reprocessed wool or card waste or strippings shall be used. The backing yarn shall be a suitable cotton yarn and shall be not more than 30 percent of the weight of the fabric. The fabric shall be thoroughly scoured. The finished fabric shall conform to the following:

Weight, ounces per square yard ——— 9, minimum, to 11, maximum
Wales, per inch ——— 17, minimum, to 20, maximum
Courses, per inch ——— 17, minimum
Color ——— unbleached, light gray, or tan

3.2 Stitches, seams, and stitching.—Unless otherwise specified, all stitching and seaming shall be done with stitch type 301 (lockstitch) and seam types as specified, in conformance with the requirements of Federal Specification DDD–S–751, using not less than 7 nor more than 10 stitches per inch. The beginning and end of all stitching shall be securely backstitched not less than 3 stitches. (See 3.8.4, 3.9.4, and 3.10.3.)

3.3 Color.—The color of the leather gloves shall be cream or light gray.

3.4 Dimensions of gloves. — The finished gloves shall conform to the dimensions shown in table II. Measurements shall be taken as shown in figures 1, 2, and 3.

TABLE II.—*Finished dimensions of gloves.*

Measurement		Sizes				Tolerance, plus or minus
		Small	Medium	Large	Extra large	
		Inches	*Inches*	*Inches*	*Inches*	*Inch*
A	Top edge of cuff to tip of second finger	12¾	13	13½	14	½
B	Bottom edge of cuff to tip of second finger	7¾	8	8½	8¾	¼
C	Across palm at thumb crotch, seam to seam	4½	5	5½	5¾	⅛
D	Tip of index finger to thumb crotch	4¾	5	5½	5¾	⅛
E	Thumb crotch to tip of thumb	2¾	3	3¼	3½	⅛
F	Across bottom edge of cuff	4¾	5	5½	6	¼
G	Across top edge of cuff	6¼	6¾	7	7½	¼

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.5 Dimensions of reinforcements. — The fourchette strips shall be approximately ¾ inch wide, the flap approximately 2 inches wide, and the thumb and finger welts approximately ½ inch wide. The welt strips for reinforcing seams shall be cut about 7/32 inch wide.

3.6 Pairing. — The gloves shall be well matched and paired, and securely stitched or stapled together.

3.7 Marking of gloves.—Each glove shall have the size printed plainly on the inside of the back near the hem of the cuff.

3.8 Type I, linesmen's gloves.

3.8.1 *Leather.*

3.8.1.1 *Glove section.*—The palm, thumb, fingers, and reinforcing pieces shall be of the following full grain leather, as specified:

Horsehide.
Cowhide.
Buckskin.

3.8.1.2 *Gauntlet.*—The gauntlet shall be of split cowhide leather.

3.8.2 *Design.*—Type I gloves shall be made in two sections as follows, as shown in figure 1:

(a) Palm, thumb, and fingers.
(b) Two-piece gauntlet.

3.8.3 *Construction.*

3.8.3.1 *Glove section.*—The thumb shall be of "inseam" construction, the fingers of "outseam" construction; the thumb shall be furnished with an "all-around-turn-back" welt, and the ends of the fingers with similar welts, "davey tips." A protective welt shall be provided for the fourchette stitching, caught in the seaming of the fourchette and turned back over the bottom of the fingers. In addition, the top of the palm and fingers shall be reinforced with a flap which shall be caught in the seaming of the gauntlet, turned back, and sewed down to the gauntlet.

3.8.3.2 *Gauntlet.* — The gauntlet shall be made in two pieces, each piece lined with cotton duck extending to within ⅜ inch of the top edge of the gauntlet to facilitate the hemming of the top edge. The hem shall be ½ to ⅝ inch wide. The remainder of the glove shall be unlined. The joining of the gauntlet and the "closing" shall be of "outseam" construction.

3.8.4 *Stitching and seaming.*—Stitches and seams of type I gloves shall conform to the requirements in table III. (See 3.2.)

TABLE III.—*Stitches and seams in type I, linesmen's gloves.*

Operation	Rows of stitching	Gage	Seam and stitching types
		Inch	
Uniting welt, palm, and fourchette	Double	1/16 to 5/32	LSa-2
Joining palm and thumb	Single	——	SSa-1
Joining fingers	Single	——	SSa-1
Sewing back seam	Double	1/16 to 5/32	LSa-2
Making gauntlet	Double	1/8 to 3/16	LSa-2
Hemming gauntlet	Single	——	EFa-1
Joining gauntlet to glove section	Double	1/8 to 3/16	LSa-2
Turning flap over gauntlet	Double	1/8 to 3/16	SSa-2
Closing seam[1]	Single	——	SSa-1

[1] A second row of stitching 1/16 inch back of the first row shall be stitched on the glove section and at hem of gauntlet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.9 Type II, welders' gloves, Montpelier pattern.

3.9.1 *Leather.*

3.9.1.1 *Front.* — The palm, thumb, and fourchettes shall be of split horsehide leather. The gauntlet piece shall be of split horsehide or cowhide leather.

3.9.1.2 *Back.*—The one-piece back shall be of snuffed horsehide leather.

3.9.1.3 *Reinforcing welts.*—The welts shall be of grain horsehide or cowhide leather.

3.9.2 *Design.*—Type II gloves shall be of the pattern known commercially as Montpelier, as shown in figure 2. The gloves shall be made of two sections, a front and a back. The front section shall be composed of a separate gauntlet piece and thumb-palm-finger piece. The back section shall be made in one piece with the gauntlet, thumb, back, and fingers continuous. The gauntlets of both the front and the back shall be lined with cotton duck; in addition, the back section shall be lined from the bottom edge of the gauntlet duck lining to the ends of the fingers with knitted fabric. The palm, thumb, and fingers of the front section shall be unlined.

3.9.3 *Construction.* — The gauntlet piece shall be lined with the cotton duck to within ⅜ inch of the top edge of the gauntlet to facilitate the hemming of the top edge, and the gauntlet and duck joined to the palm and thumb by "inseam" construction with a protective welt-strip inserted and caught in the seaming. The back of the glove shall be made in one continuous piece of leather and lined throughout; the gauntlet portion shall be lined with cotton duck and the remaining area with the knitted fabric, joined to the top edge of the duck lining and extending to the ends of the fingers. The thumb shall be joined to the palm by "inseam" construction with an "all-around" welt strip inserted and caught in the seaming. The fronts shall be joined to backs by "inseam" construction with a welt strip caught in the seaming from the top of the glove to the top of the little finger and the seaming continued around the fingers. The closing shall be of "inseam" construction with a protective welt strip extending from the top of the glove to the top of the first finger, inserted and caught in the seaming.

3.9.4 *Stitching and seaming.*—Stitches and seams of type II gloves shall conform to the requirements of table IV. (See 3.2.)

TABLE IV.—*Stitches and seams in type II, welders' gloves, Montepelier pattern.*

Operation	Rows of stitching	Gage	Seam and stitching types
		Inch	
Making lining for backs	Double	⅛ to 3/16	LSa-2
Hemming fronts and backs	Single	——	EFa-1
Joining thumb to palm	Single	——	SSa-1
Joining gauntlet to palm	Single	——	SSa-1
Closing	Single	——	SSa-1

3.10 Type III, welders' gloves, Gunn pattern.

3.10.1 *Leather.*—Type III gloves shall be of split cowhide leather; welts shall be full grain horsehide or cowhide.

3.10.2 *Design.*—Type III gloves shall be of the pattern known commercially as Gunn-cut, as shown in figure 3. The face of the thumb, the palm, and the first (index) and fourth (little) fingers shall be of one piece of leather. The back shall be of one piece and shall include the backs of the fingers and gauntlet. The palm sides of the second and third fingers shall be of one piece. The back of the thumb shall be of one piece. The gauntlet cuffs shall be made of two pieces (front and back) and shall be fully lined or faced with cotton duck. The facing may be of one or two pieces. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

front and back of the facings shall be cut shorter than the outside of the cuffs, and the outside of the cuffs shall be turned over the top and stitched to form a self-binding. There shall be a lining in the back extending from the bottom of the gauntlet facing to within ½ inch of the tip of the finger.

3.10.3 *Seaming.* — All seams of type III gloves, including the entire thumb seam, shall be leather welted, sewn "inseam" throughout with the exception of the seam at the base of the second and third fingers, which shall be flat and covered with a leather flap. The cuff may be attached to the palm with a double-needle flat seam. Welts shall protrude from the seams not more than ⅛ inch. (See 3.2.)

3.11 Workmanship. — The finished gloves shall be clean, well made, well formed, and free from defects which affect their appearance or which may affect their serviceability. The color of all component parts shall match as closely as possible.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.—Unless otherwise specified, two pairs of gloves shall be taken from each lot of 100 pairs, or fraction thereof, of each type and size delivered, for inspection and tests. (See 7.3.2.)

4.2 Inspection.—Gloves shall be inspected for compliance with this specification with respect to material, workmanship, and dimensions.

4.3 Tests.

4.3.1 Unless otherwise specified, tests shall be conducted in accordance with the following methods described in Federal Specification KK–L–311:

Test	Method No.
Weight	210.1
Stitch tearing strength	246.2
Chromic oxide	380.1
Grease	320.1
Acidity (pH)	370.1

4.3.2 *Flexibility and shrinkage test.* — To determine conformance with the requirements of 3.1.1.3, the leather shall be tested as follows: Two gage marks, 2 inches apart, shall be placed on a sample of the leather. The sample shall then be heated to a temperature of 85° ± 2.5° C., and then quickly immersed in cold water. The sample shall be allowed to soak for 5 minutes, then removed and dried at 85° ± 2.5° C. The sample shall then be immersed a second time in cold water for a period of 5 minutes and removed and dried at 85° ± 2.5° C.

5. PREPARATION FOR DELIVERY

5.1 Packaging. — Unless otherwise specified, commercial packages will be acceptable.

5.2 Packing.—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.

5.3.1 *Issue packages.* — Unless otherwise specified, issue packages shall be marked with the name, type, and size of the commodity, the quantity contained therein, and the names of the contractor and manufacturer.

5.3.2 *Shipping containers.*—Unless otherwise specified, shipping containers shall be marked with the name, type, and size of the commodity as defined by the contract or order under which the shipment is made, the quantity of each type and size contained therein, the name of the contractor, the number of the contract or order, the name and address of the consignee, and the gross weight.

6. NOTES

6.1 Ordering data. — Purchasers should specify the type and size of glove and, for type I, the leather required, and should exercise any desired options offered herein. (See 1.2, 1.3, 3.1.2, 3.8.1, 4.1, 4.3.1, 5.1, and 5.3.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army.

7.2.1 *Applicable specifications.*—

U. S. Army Specification:

100–2—Standard Specification for Marking Shipments by Contractors.

(Copies of specifications required for Army purchases may be obtained upon application to the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.)

7.2.2 *Construction of type I, linesmen's gloves.*—Construction of type I linesmen's gloves shall be as specified hereinafter. All stitching and seaming specified shall be in accordance with Federal Specification DDD–S–751.

7.2.2.1 *Cutting of leather.*—Skins shall be dampened and all the stretch in the lengthwise direction pulled out before cutting gloves.

7.2.2.2. *Body stretch of leather.* — There shall be sufficient stretch in the width direction of the leather to prevent, in the finished glove, constriction or binding across the back of the hand and knuckles when fingers are doubled under to form a fist.

7.2.2.3 *Join palm to fourchette.*—Lap the palm over the fourchette. Position the welt piece on top on a line with the edge of the palm, with the grain of the leather of welt over and against the grain of the leather of the palm. Unite welt, palm, and fourchette with a double row of stitching 1/16 to 3/32 inch gage; seam type LSa–2. The welt piece shall be so positioned that when turned back over the seam, it shall measure not less than 1/2 inch wide and match the grain of the palm. The contacting corners of the welt piece shall be caught in the seaming of the first finger and little finger, respectively. The beginning and end of the stitching shall be securely backstitched with three stitches. Special care shall be exercised in the operation to avoid any twisting or distortion of the fingers.

7.2.2.4 *Join thumb and palm — "inseam" construction.*—Seam the thumb to the palm all around the edge of the thumb; seam type 301–SSa–1. The welt strip shall be so positioned on top of the seam and caught in the stitching that when turned back it shall match the grain of the leather thumb. The welt strip shall extend to the top of the glove. The top edges of the thumb and welt shall be caught in the seam joining the gauntlet to the glove.

7.2.2.5 *Join fingers—"outseam" construction.*—The end of each of the four fingers shall have protective welt strips like the welt strip of the thumb, positioned as indicated by notches on the patterns. Seam the backs to the fronts around the fingers with the welts laid on the seam and caught in the stitching, so positioned that when turned back, they shall match the grain of the finger leather. The seaming shall be so performed as to prevent any twisting or distortion of the fingers. The end of the seaming shall be securely back-stitched about 1/2 inch; seam type 301–SSa–1.

7.2.2.6 *Back seam.*—Lap the front of the glove over the back of the glove, as indicated on the patterns and unite with a double row of stitching 1/16 to 1/8 inch gage; seam type 301–LSa–2.

7.2.2.7 *Make gauntlet.*—The gauntlet shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

be made with a front and back piece of a suitable leather, each piece lined throughout with duck extending to within about 3/8 inch of the top of the gauntlet. The sides of fronts and backs shall be lapped with the fronts on top and united with a double row of stitching 1/8 to 3/16 inch gage, catching the lining pieces similarly lapped; seam type 301–LSa–2.

7.2.2.8 *Hem gauntlet.*—Turn the top of the gauntlet over the duck lining and single-stitch through the glove and lining 1/16 to 1/8 inch from the raw edge of the leather; stitching type 301–EFa–1; hem to measure 1/2 to 5/8 inch wide.

7.2.2.9 *Join gauntlet to glove.* — Lay the flap on the palm, as indicated on patterns, with the straight edge of the flap on a line with the top edge of the palm and thumb, and with the grain of the leather of the flap over and against the grain of the leather of the palm, so positioned that when turned back, the flap will match the palm. Lap the bottom edge of the gauntlet over the flap and top edge of the glove and unite the palm, flap, and gauntlet with a double row of stitching 1/8 to 3/16 inch gage, catching the edge of the duck lining in the stitching, stitching to be placed about 1/8 inch down from top edge of palm and thumb; seam type 301–LSa–2. Turn the flap back over the gauntlet and double-stitch around the edges to the gauntlet through the duck lining 1/8 to 3/16 inch gage; seam type 301–SSa–2.

7.2.2.10 *Closing seam.*—Join the "fronts" to the "backs" from the top of the glove to a point about 1 inch beyond the top of the welt for the little finger, catching the welt in the seaming; seam type 301–SSa–1. Place a second row of stitching 1/32 inch back of the first row on the glove section, and at the hem of the gauntlet. The duck lining of the gauntlet shall be caught in the seaming

7.2.3 *Construction of type II, welders' gloves, Montpelier pattern.*—Construction of type II, welders' gloves, Montpelier pattern, shall be as specified hereinafter. All stitching and seaming specified shall be in accordance with Federal Specification DDD–S–751.

7.2.3.1 *Cutting of leather.*—Skins shall be dampened and all the stretch in the lengthwise direction pulled out before cutting the gloves.

7.2.3.2 *Body stretch of leather.* — There shall be sufficient stretch in the width direction of the leather to prevent, in the finished glove, constriction or binding across the back of the hand and knuckles, when fingers are doubled under to form a fist.

7.2.3.3 *Make linings for "backs".*—Lap the bottom edge of the cotton duck over the top edge of the knitted lining and unite with a double row of stitching about 1/8 inch gage, the stitching to be 1/16 to 1/8 inch down from top edge of duck; seam type 301–LSa–2. Baste edges of knitted lining to back and fingers.

7.2.3.4 *Hem "fronts" and "backs" separately.*—Turn the top edges of the fronts and backs respectively over the duck lining and single-stitch through the duck and leather; the stitching to be about 1/16 to 1/8 inch down from raw edge of the leather; stitching type 301–EFa–1.

7.2.3.5 *Join thumb to palm — "inseam" construction.*—Seam the thumb to the palm all around the edges, inserting the reinforcing welt-strip in the seam, which shall be caught in the stitching of the seam; seam type 301–SSa–1. The tops of welt strip and thumb shall be caught in the joining seam of the gauntlet.

7.2.3.6 *Join gauntlet to palm — "inseam" construction.*—Join the palm and the gauntlet with a single row of stitching, inserting the leather reinforcement strip in the seam, which shall be caught in the stitching of the seam, together with the top edges of the palm, thumb, and thumb reinforcing strip; seam type 301–SSa–1.

7.2.3.7 *Closing—"inseam" construction.*—Seam the "fronts" and the "backs" from the top of the glove on one side, around the fingers to the top of the glove on the other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

side, care being taken to avoid any twisting or distortion of the fingers. The leather welt strips shall be inserted in the seams and caught in the stitching, extending from the notch at the top of the "first finger" on one side, and notch at the top of the "little finger" on the other side, to the bottom edge of the hem of the gauntlet. The ends of the stitching shall be backstitched the width of the hem on each side; seam type 301–SSa–1. The knitted and duck linings shall be caught in the seaming.

7.2.4 *Marking of gloves.*—Each glove shall have a combination size-and-contractor's label applied by dry heat transfer to the inside of the back of the glove, at the center, about ½ inch down from the finished top edge. The imprint of the marking shall be in boldface yellow or white type, with the lettering and numerals in clear outline and readily visible. The imprint shall contain the following information, with the size number not less than ½ inch in height and the rest of the information ⅛ inch in height:

Stock number
Nomenclature (see invitation for bids)
Name of contractor
Contract number
Size

7.2.5 *Packaging.* — Four pairs of gloves shall be stacked together in a bundle, pairs alternately reversed lengthwise and widthwise to form a compact bundle. Each bundle of gloves shall be wrapped in kraft paper conforming to the requirements of Federal Specification UU–P–268 having a basis weight of not less than 50 pounds per ream (24 x 36 — 500) and securely sealed with gummed kraft paper tape.

7.2.6 *Packing.*

7.2.6.1 *For domestic shipment.* — Forty-eight pairs of gloves, unless otherwise specified by the contracting officer, packaged as specified in 7.2.5, shall be packed in a snug-fitting corrugated fiberboard box conforming to the requirements for style RSC, Federal Specification LLL–B–631 except that the fiberboard shall have a minimum bursting strength of 275 pounds per square inch. The gloves shall be arranged in each box two bundles in length, three bundles in width, and two bundles in depth. The box size shall be determined by the contractor. All flaps of each box shall be securely sealed with a good quality adhesive applied throughout the entire area of contact between the flaps.

7.2.6.2 *For overseas shipment.* — Forty-eight pairs of gloves, packaged as specified in 7.2.5, shall be packed in boxes constructed and strapped to conform to the requirements of one of the following NME Specifications:

JAN–P–103 — Boxes; Wood Cleated; Solid Fiberboard; style A or B.
JAN–P–106 — Boxes; Wood, Nailed; style 2 or 4.
JAN–P–108 — Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior; exterior style RSC.

Only one style and size of box shall be used for any one contract. The gloves shall be arranged in the box as specified for domestic shipment.

7.2.6.2.1 Each exterior shipping box shall be provided with a sealed case liner or sealed prefabricated bag of waterproof barrier-material made in conformance with the requirements of NME Specification JAN–P–125, type L–2 or M.

7.2.7 *Marking.*

7.2.7.1 *Bundles.*—Each bundle shall be legibly labeled or stenciled to show the following information:

Stock number
Nomenclature
Quantity
Name and address of manufacturer

7.2.7.2 *Shipping containers.*—Each exterior shipping container shall be marked in accordance with U. S. Army Specification 100–2, except that corner service color marking will not be required for domestic shipping containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

7.3 Navy.

7.3.1 *Applicable specifications and other publications.*—

Navy Department Specification:

General Specifications for Inspection of Material.

Bureau of Supplies and Accounts Publication:

Navy Handbook on Packing and Materials Handling—Packaging, Packing, and Marking of Clothing, Small Stores, and Textiles.

(Copies of Federal specifications required for Navy purchases and Navy Department specifications may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Supply Officer in Command, Naval Supply Center, Norfolk 11, Va. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.

(Applicable sections of the Navy Handbook on Packing and Materials Handling — Packaging, Packing, and Marking of Clothing, Small Stores, and Textiles may be obtained upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C. When requesting copies, bidders and contractors should state the specification number and complete nomenclature of the item to be packed, so that the proper sections may be forwarded.)

7.3.2 *Sampling.*

7.3.2.1 *Lot.*—For purposes of sampling, a lot shall consist of not more than 5,000 pairs of gloves of one type and size offered for delivery at one time.

7.3.2.2 *Sampling for inspection.*—For purposes of inspection, the Naval inspector shall select representative samples, as shown in table IV.

TABLE IV.—*Sampling procedure.*

Number of pairs in lot	Number of samples to be selected
1– 15	All
16– 25	15
26– 40	20
41– 65	25
66– 120	30
121– 200	35
201–5,000	55

7.3.2.3 *Sampling for tests.*—From each lot three pairs of gloves representative of the lot shall be selected by the Naval inspector and forwarded to the Industrial Test Laboratory, Philadelphia Naval Shipyard, Naval Base Station, Philadelphia 12, Pa.

7.3.3 *Marking of gloves.*—Each glove shall have a combination size-and-contractor's label applied by dry heat transfer to the inside of the back of the glove, at the center, about ½ inch down from the finished top edge. The imprint of the marking shall be in bold-face yellow or white type, with the lettering and numerals in clear outline and readily visible. The imprint shall contain the following information, with the size number not less than ½ inch in height and the rest of the information ⅛ inch in height:

Stock number
Nomenclature (see invitation for bids)
Name of contractor
Contract number
Size

7.3.4 *Packaging and preparation for shipment.*—Packaging and preparation for shipment shall be in accordance with the requirements for "Gloves, Gauntlet, Leather", of the Navy Handbook on Packing and Materials Handling—Packaging, Packing, and Marking of Clothing, Small Stores, and Textiles.

NAVY: AMCMOShSY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

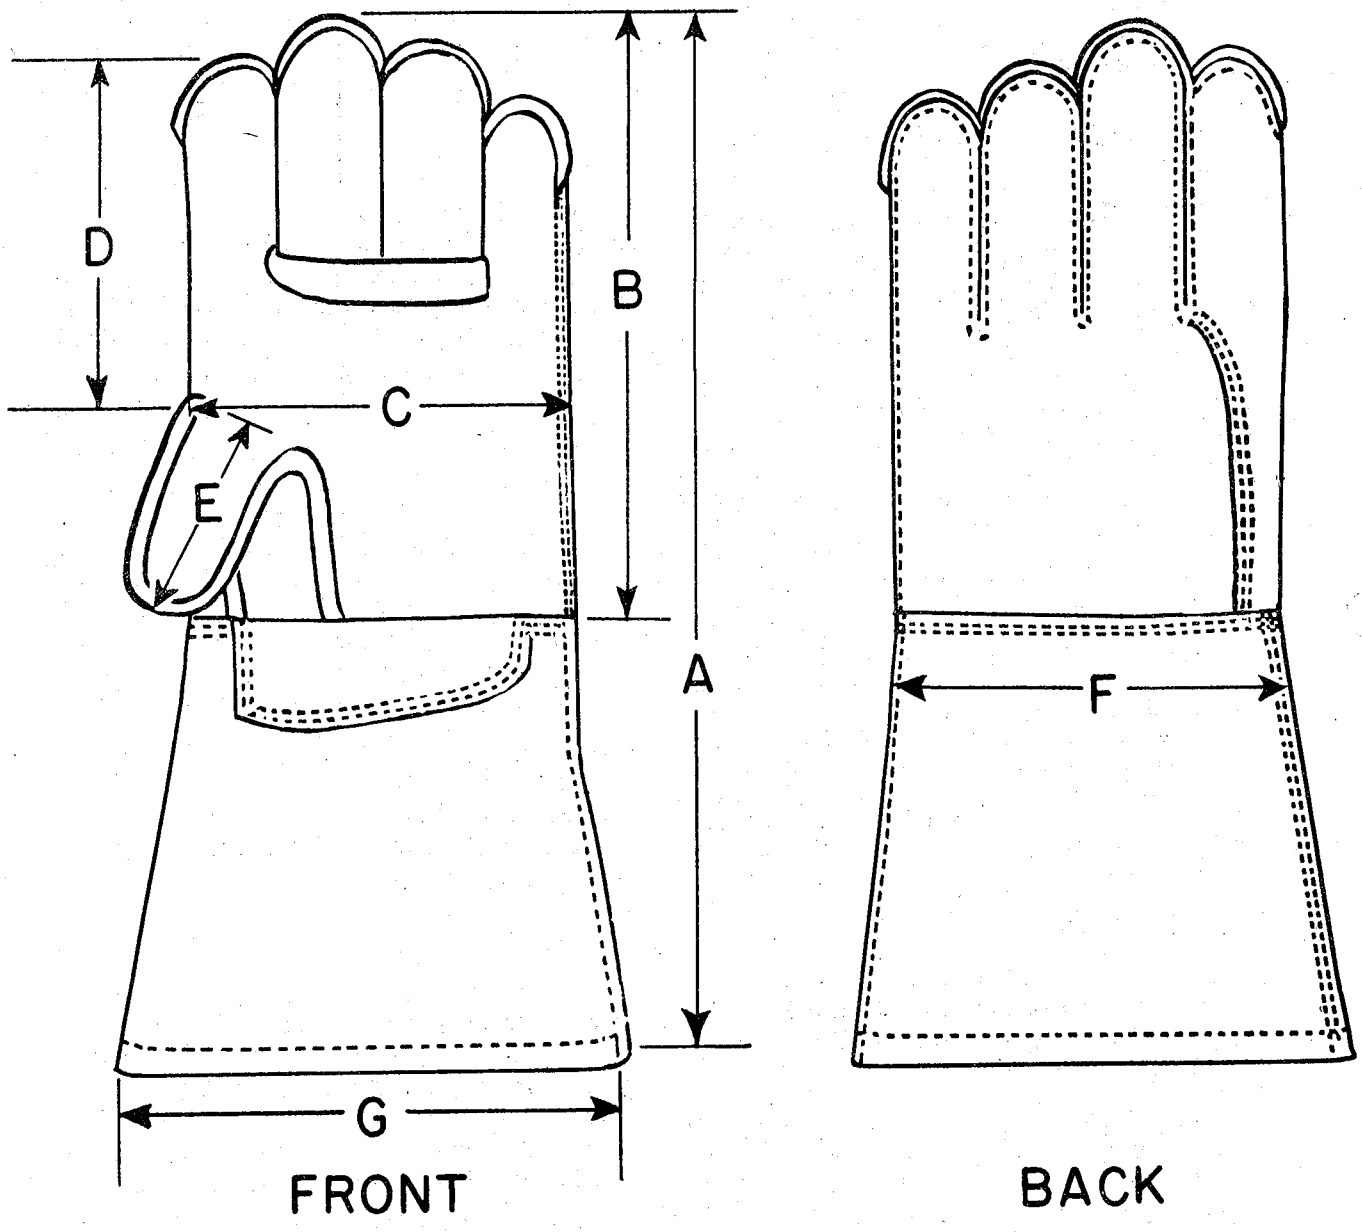


FIGURE 1.—*Type I, linesmen's gloves.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

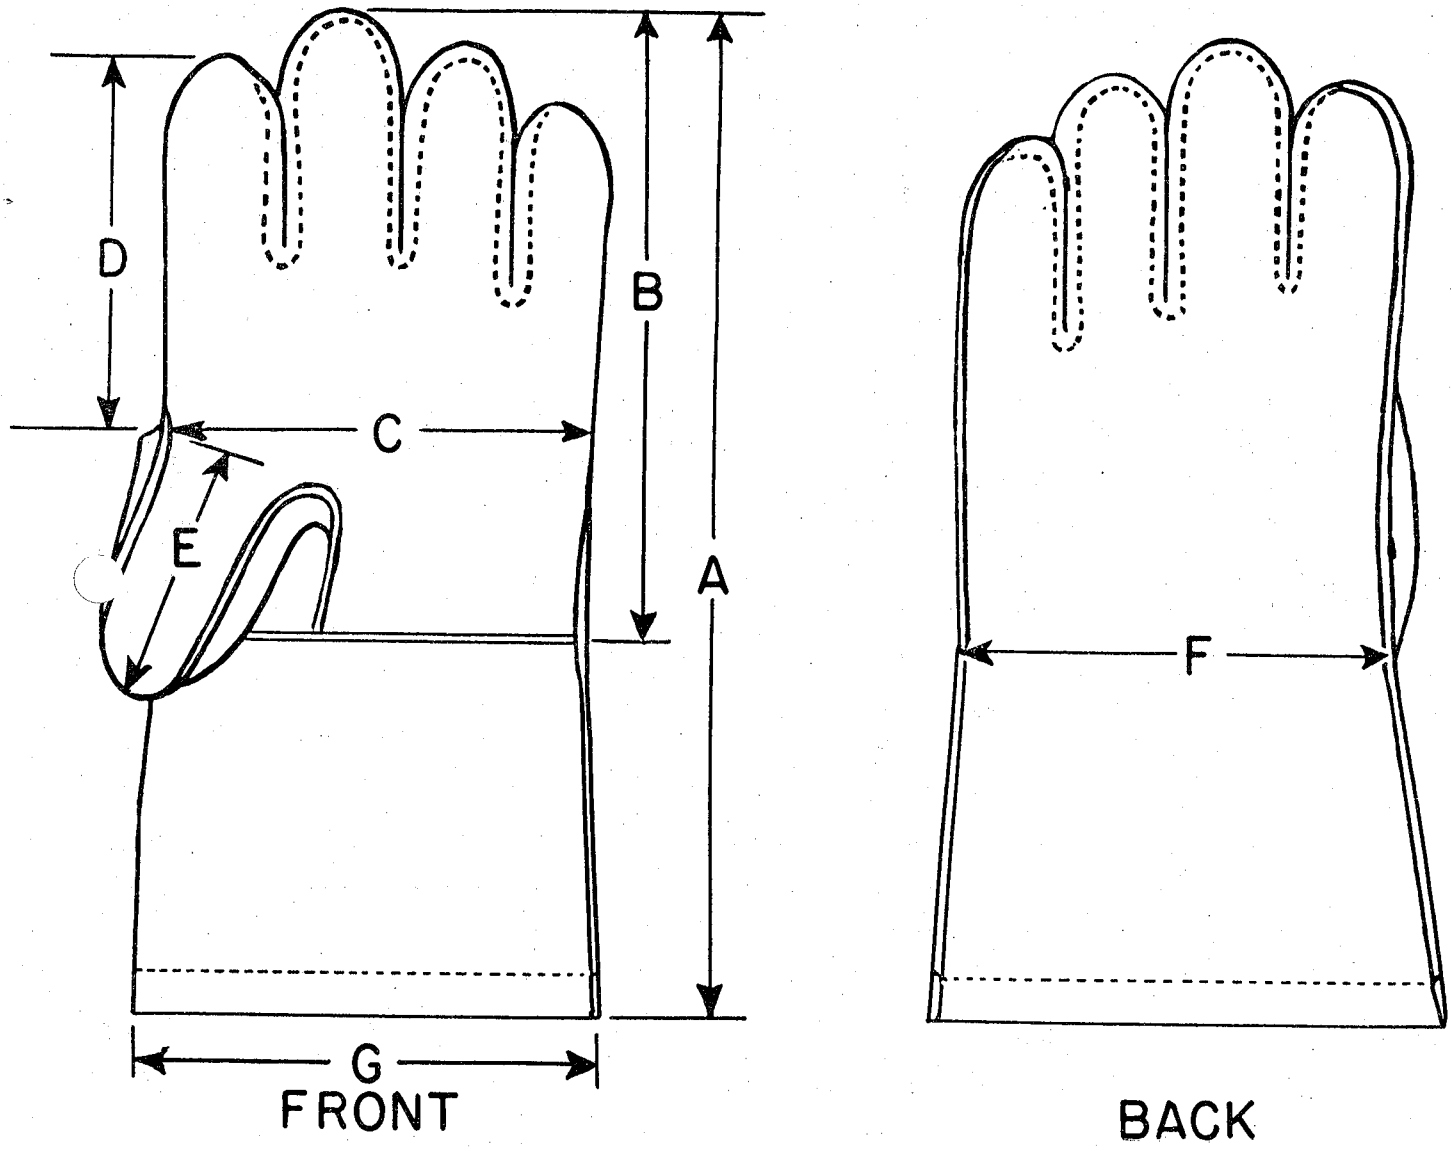


FIGURE 2.—*Type II, welders' gloves, Montpelier pattern.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

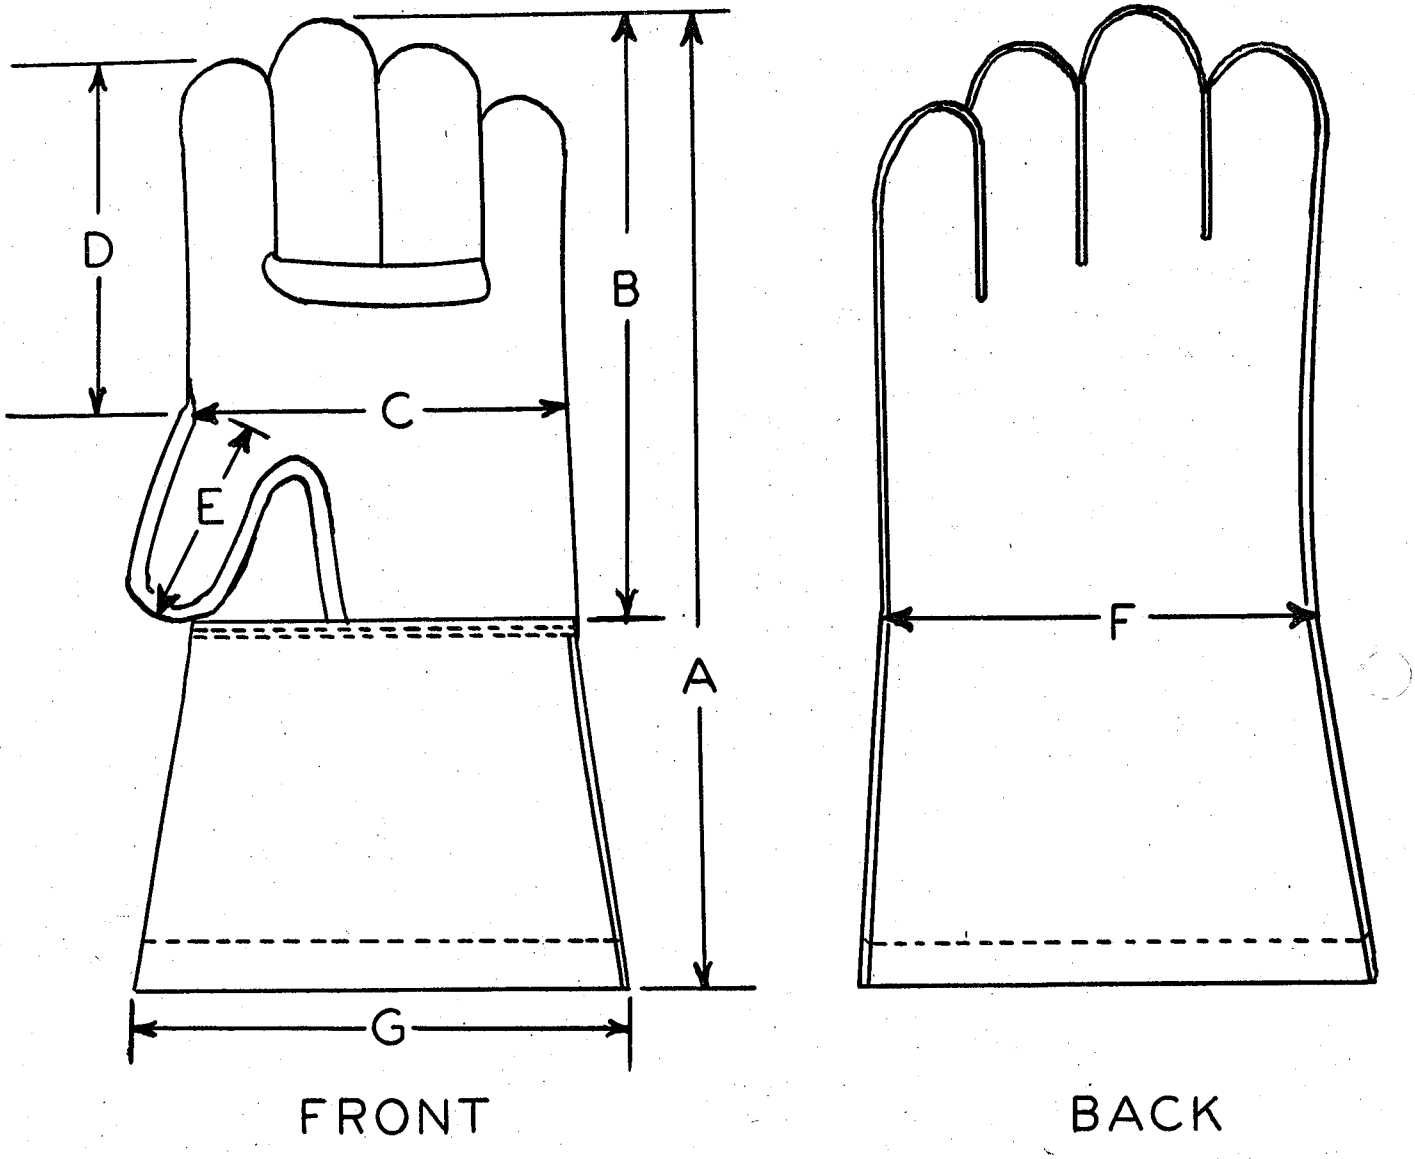


FIGURE 3.—*Type III, welders' gloves, Gunn pattern.*

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

For sale by the Superintendent of Documents, Washington 25, D. C. Price 10 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.