KK-M-330B
July 18, 1975
SUPERSEDING
Fed. Spec. KK-M-330A
February 17, 1965

FEDERAL SPECIFICATION

MITT, PAINT, LAMBSKIN (FURNISHED WITH TWO POLYETHYLENE LINERS)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a lambskin, thumb-style, paint mitt, furnished with two polyethylene liners.

1.2 Classification.

1.2.1 Type and grade. Paint mitts covered by this specification shall be of one type and grade designated as thumb-style.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-665 - Boxes: Paperboard, Metal Edged and Components.
PPP-B-676 - Boxes, Set-Up.

Federal Standards:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).
Fed. Std. No. 311 - Leather, Methods of Sampling and Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza., Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Material. The material from which the paint mitt is made shall be chrome tanned, shearling lambskin, conforming to the requirements of table I, when tested as specified in 4.4.

TABLE I. Basic material

Requirement	Minimum	Maximum
Chromic oxide Cr_2O_3 (dry basis), percent.....	0.75	---
pH.....	3	4
Shrinkage temperature, ^oF.....	162	---

3.2 End item. The shearling mitt shall be of a clean, uniform color. There shall be no bare spots, cuts, holes, or hard spots in the shearling. The wool shall be uniformly clipped to the specified length (see 3.2.2).

3.2.1 Construction and design. The mitt shall be so constructed that the flesh side of the shearling is on the inside, with the wool remaining on the outside of the mitt. This arrangement permits the wool on the outside of the mitt to be used for applying paints to various surfaces. The paint mitt shall be designed with round corners, shall be made with a thumb sheath, and shall have an elastic wristlet. The tubing for the wristlet shall be made of a true 1 by 1 rib-knit, seamless cotton tubing. The whole mitt unit shall be pieced and sewn with not more than three pieces of skin on either side.

3.2.1.1 Liner. Each thumb-style mitt shall be provided with two polyethylene liners, packaged free of the mitt. The liners shall have approximately the same design as the mitt, and shall fit inside the mitt.

3.2.2 Dimensions. Unless otherwise specified, the wool on the outside of the mitt shall be 1/2 inch to 1 inch. The dimensions and contour of the paint mitt shall be in accordance with figure 1.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.2 Inspection of preparation for delivery requirements. An inspection shall be made to determine whether the packaging, packing and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with table II for inspection of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 4.0 defects per hundred units.

4.3 Sampling.

4.3.1 Size of lot. All paint mitts of the same classification presented for delivery at one time shall be considered a lot for the purpose of examination and tests.

4.3.2 Sampling for visual and dimensional examination (end item). A random sample of at least 3 mitts shall be selected from each lot of 500, or fraction thereof.

4.3.3 Sampling for tests (material). The material from which the paint mitt is made shall be sampled in accordance with Fed. Std. No. 311.

4.4 Examination.

4.4.1 Visual and dimensional examination of end item. Sample mitts, selected in accordance with 4.3.2, shall be examined for the defects listed in table II. Any mitt in the sample containing one or more visual or dimensional defects shall be considered a defective mitt. If there are any defective mitts in any one sample, the lot represented by the sample shall be rejected.

TABLE II. Classification of defects

Examine	Defects
Markings	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
Material	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, or distortion of container.
Contents	Quantity per container is more or less than required. Gross weight exceeds the requirements of the box specification.

4.5 Test procedures. Samples selected in accordance with 4.3.3, shall be subjected to the test methods of Fed. Std. No. 311 specified in table III.

TABLE III. Test methods

Test	Method
Chromic oxide (Cr_2O_3).....	6515
pH.....	6621
Shrinkage temperature.....	7011

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each mitt with two liners shall be furnished in a polyethylene bag and shall be further packaged in quantities of six in a close-fitting box conforming to PPP-B-566, PPP-B-665 or to PPP-B-676. The boxes shall be secured to prevent accidental opening.

5.1.2 Level C. The mitts shall be packaged to insure protection during shipment and safe delivery at destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Mitts packaged as specified in 5.1 shall be packed in quantities specified in the contract or order in a close-fitting box conforming to PPP-B-636, WSC. The box shall be closed and sealed in accordance with the appendix to PPP-B-636.

5.2.2 Level B. Twelve unit packages of mitts (72 mitts) packaged as specified in 5.1 shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The closure of the box shall be in accordance with method II of the appendix to PPP-B-636.

5.2.3 Level C. The mitts packaged as specified in 5.1 shall be packed to comply with the National Motor Freight Classification rules or the Uniform Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2, as specified (see 6.2).

5.3.1 Civil agencies. Marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Typical uses for paint mitts covered by this specification are: For painting heating and ventilating ducts, gutters, toys, deck furniture, basement pipes, fences, railings, tanks, machinery and equipment, cables, smoke stacks, and flag poles.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Length of wool on outside of mitt, if other than that specified is desired.
(c) Inspection responsibility if other than as specified herein; and administrative provisions for inspection records, when applicable (see 4.1).
(d) Level of packaging and packing required (see 5.1 and 5.2).
(e) Whether civil or military marking is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:57Z
Check the source to verify that this is the current version before use.

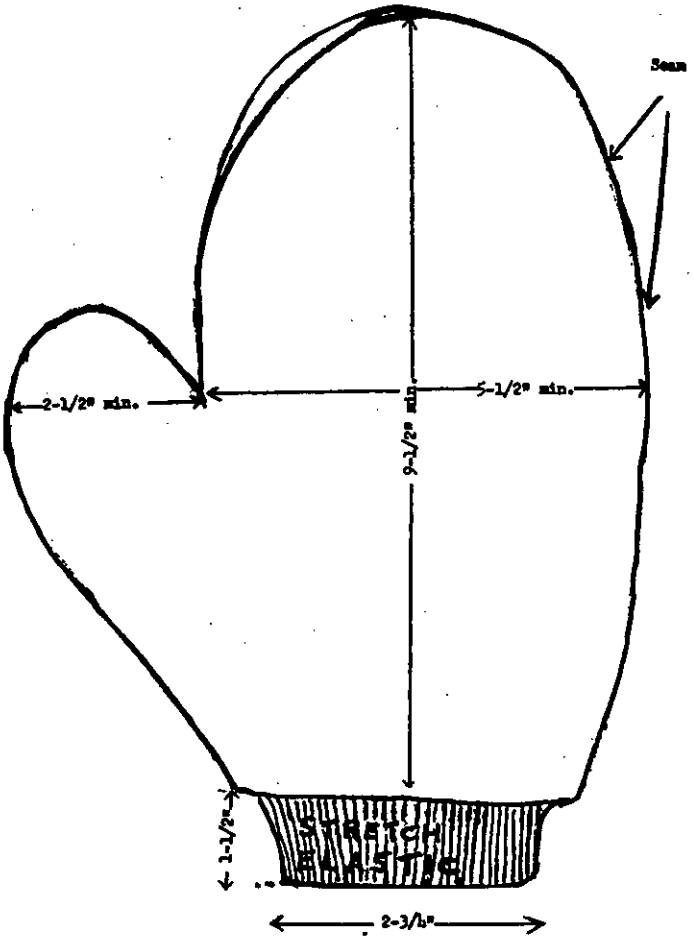


FIGURE I. Design of mitt (thumb-style)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:57Z
Check the source to verify that this is the current version before use.



FIGURE 2. Mitt

Preparing activity:
GSA - FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.