KK-S-151C
31 July 1989
SUPERSEDING
KK-S-151B
3 April 1967

FEDERAL SPECIFICATION

SATCHELS, PHYSICIAN'S

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers physicians' leather satchels suitable for use by medical personnel on the ground and in flight.

1.2 Classification. Physicians' satchels shall be of the following types as specified (see 6.1):

Type I - Boston style, 16 inch
Type II - Knickerbocker style, 18 inch

2. APPLICABLE DOCUMENTS

2.1 Government publications. The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

FEDERAL SPECIFICATIONS

V-T-285	Thread, Polyester
V-T-291	Thread, Linen
KK-L-154	Leather, Cattlehide (Bag and Case)
KK-L-271	Leather, Cattlehide, Strap, Vegetable-Tanned
NN-P-530	Plywood, Flat-Panel

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

FEDERAL SPECIFICATIONS (continued)

QQ-A-250\8	Aluminum Alloy, 5052 Plate and Sheet
QQ-B-626	Brass, Leaded and Non-Leaded; Rod, Shapes, Forgings, and Flat Products with Finished Edges (Bar, Flatwire, and Strip)
UU-P-268	Paper, Kraft, Untreated, Wrapping
CCC-C-443	Cloth, Duck Cotton; (Single and Piled Filling Yarns, Flat)
PPP-B-601	Boxes, Wood Cleated-Plywood
PPP-B-621	Box, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Shipping, Fiberboard

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

FEDERAL STANDARDS

FED. STD No. 123	Marking for Shipment (Civilian Agencies)
FED. STD No. 191	Textile Test Methods
FED. STD No. 151	Metal, Test Methods
FED. STD No. 751	Stitches, Seams, and Stitchings

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bi-monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:56Z
Check the source to verify that this is the current version before use.

(Single copies of this specification, and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

MILITARY SPECIFICATIONS

MIL-L-10547	Liner, Case and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

MILITARY STANDARDS

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-794	Part and Equipment, Procedures for Packaging and Packing of

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Except as specified herein, materials shall conform to the applicable portions of the specifications and standards referenced herein, and shall meet the requirements shown therein. In addition, the metals shall conform to the chemical requirements of their applicable specifications, when tested as specified in 4.4.2. When materials to be used are not specifically designated, those used shall be of the highest quality used for the purpose in commercial practice, and shall be entirely suitable for the purpose intended.

3.1.1 Type I, Boston style.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

3.1.1.1 Covering. Covering shall be genuine top-grain cattlehide, not less than 7/64 inch thick, finished in walrus grain, and conforming to type I, class 1, mildew resistant treated or class 2, untreated, of KK-L-154. Style A through D shall not apply. As an alternate, when constructed as specified in 3.2.1.2, the covering may be 3-4 oz. chrome tanned split leather, tweed grain, elongation 6.5 mm, breaking force 20 gram PSI.

3.1.1.2. Straps and loops. Straps for closing the bag shall conform to the requirements specified in 3.1.1.1. The inside straps and loops shall be smooth-finished cattlehide, not less than 4/64 inch thick, conforming to type I or II, class 2 of KK-L-271.

3.1.1.3. Lining. The interior lining of the satchel shall be vinyl-coated cloth weighing not less than 7 ounces per square yard. As an alternate, 30 to 32 ounces per linear yard (basic 54 inch width) shall be acceptable. The color of the lining shall be tan or beige.

3.1.1.4 Frame. The frame shall be electro-zinc coated steel.

3.1.1.5 Lock, dee-rings, rivets, and feet. Lock, dee-rings, rivets, and feet shall be nickel-plated half-hard brass, conforming to composition 22 of QQ-B-626. The following alternates are also permitted.

Component	Material
Lock	Brass, as above, but chromium-plated. Steel chromium-plated. Steel nickel-plated.
Dee-rings and rivets	Steel, nickel-plated.
Feet	Steel, finished in black oxidized finish.

3.1.1.6 Reinforcing wires or strips. The reinforcing wires or strips shall be steel, cadmium or zinc plated.

3.1.1.7 Plywood. The plywood shall conform to NN-P-530 and shall be group B, Douglas-fir, exterior type, grade A-B, 3-ply, bonded, and water-resistant, not less than 3/16 inch thick. As an alternate to plywood, a high quality fibre board (chipboard or binderboard) shall be acceptable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

3.1.1.8 Thread. The thread shall be linen, conforming to type B, lock-stitch twist, class 1 or 2, 5-ply, left-hand or "Z" twist, of V-T-291. As an alternate to linen thread, a 100 percent polyester thread conforming to type I, class 1, subclass A, number size 3 of V-T-285 shall be acceptable.

3.1.1.9 Carrying handles. The leather for the carrying handles shall be type I, class 2 (untreated) of KK-L-154, not less than 7/64 inches thick, except that it shall have a smooth finish.

3.1.1.10 Color. Unless otherwise specified, the satchel, including covering, straps, loops, handle, lining, and thread shall be black.

3.1.1.11 Reinforcements. Sideboards made of 0.080 inch thick minimum paperboard or chipboard, approximately 4 inches wide, shall be used to reinforce the walls of the "Boston Style" bag. The reinforcements shall be suitably fastened between the liner and outer covering.

3.1.1.12 Cardboard. When used with alternate covering specified in 3.1.1.1, leather backing shall be Dorine cardboard, natural color, .020 weight (see 6.2), and glued to the 32 oz. expanded vinyl lining, see 3.1.1.3, forming a sandwich.

3.1.2 Type II, Knickerbocker style.

3.1.2.1 Covering. The covering shall be top-grain, embossed cattlehide, not less than 2/64 inch thick conforming to type I, class 1, or class 2, style D of KK-L-154. Tensile and elongation requirements do not apply.

3.1.2.2 Binding. The binding shall conform to the requirements specified in 3.1.2.1, except that the thickness shall not be less than 4/64 inch.

3.1.2.3 Lining. The lining shall be a grained, chip-resistant, water-proof, alcohol-resistant, vinyl-coated, drill cloth. The weight of the unbleached, undyed, drill cloth (grey cloth) shall be not less than 5.33 ounces per square yard, and its thread count shall be not less than 68 by 40. The drill cloth shall be vat dyed. The vinyl coating with the color incorporated therein, shall be applied to one side of the dyed drill cloth. The weight of the coating shall be not less than 5.0 ounces per square yard when tested as specified in 4.4.3, and the total weight of the finished material shall be not less than 10 ounces per square yard. The thread count of the finished material shall be not less than 68 by 40.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

3.1.2.4 Cotton duck. Cotton duck shall have a weight of not less than 8.47 ounces per square yard, conforming to type I of CCC-C-443.

3.1.2.5 Insert. The insert shall be 0.0320 inch (No. 20, Brown & Sharpe (B & S) gage) thick aluminum alloy, 5052-H34, of QQ-A-250/8 except for reinforcing strips, linkage, and rivets for insert which shall be steel, heavily nickel-plated. Commercial tolerances shall apply.

3.1.2.6 Latches, locks, dee-rings, dee-ring loops, rivets, and feet. Latches, locks, dee-rings, dee-ring loops, rivets and feet shall be nickel-plated, half-hard brass, conforming to composition 22 of QQ-B-626. As an alternate, dee-rings, dee-ring loops, and rivets shall be fabricated of steel, nickel-plated; feet shall be fabricated of steel and finished in black oxidized finish.

3.1.2.7 Basswood or yellow poplar. The basswood or yellow poplar used for the ends and sides of wooden undercase shall be well-seasoned, free of knots and splits and shall be 3/16 inch thick.

3.1.2.8 Plywood. The plywood shall be as specified in 3.1.1.7.

3.1.2.9 Glue. The glue shall be water-resistant and suitable for the purpose intended.

3.1.2.10 Thread. Thread shall be as specified in 3.1.1.8.

3.1.2.11 Steel for undercase. The reinforcing angles for the wooden undercase shall be 0.0239 inch (No. 24, United States Standard Revised (U.S.S. Rev.) gage) thick steel. The strip of steel along the edge of the undercase cover shall be 0.0299 inch (No. 22, U.S.S. Rev. gage) thick steel. Commercial tolerances shall apply.

3.1.2.12 Carrying handle. The leather for the carrying handle shall be as specified in 3.1.1.9.

3.1.2.13 Reinforcing for handle. The reinforcing wires or strips for the handle shall be as specified in 3.1.1.6.

3.1.2.14 Color. Unless otherwise specified, the satchel, including covering, handle, lining, and thread shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2 Design and construction.

3.2.1 Type I, Boston style. The general design of type I satchel shall be as shown in figure I and shall consist of a leather-covered metal type frame, double drop handles, lock, metal feet, and name-plate. The inside of the satchel shall be lined with vinyl-coated cloth, fitted with a pocket, adjustable straps and loops for bottles and instruments.

3.2.1.1 Dimensions. The outside dimensions of the satchel shall be 16 inches long, 8-1/2 inches wide, and 10 inches high, with a tolerance of plus or minus 1/4 inch in each dimension.

3.2.1.2 Construction. The frame shall be sewed-in and shall open to full length and full width, providing easy access to the interior. The bottom of the satchel shall be reinforced with 3-ply plywood or fiberboard as specified in 3.1.2.8. The four lower corners shall be reinforced on the outside with leather as specified in 3.1.1.1. The outside of the body shall be made of three pieces of leather as specified in 3.1.1.1, one piece forming the bottom and one piece forming each side. As an alternate construction, the alternate covering specified in 3.1.1.1 shall be backed with Dorine cardboard. The lower and side edges of the side pieces shall overlap 1 inch onto the bottom, and the edges shall be attached by one continuous line of stitches. The inside of the satchel, opposite the pocket, shall be fitted with evenly spaced loops and adjustable straps as specified in 3.1.1.2. There shall be one horizontal row of not less than six loops for bottles and not less than two vertical rows of not less than four loops to each row for instruments. The inside pocket shall be not less than 12-1/2 inches long, 2-1/2 in wide, 4-1/2 in. deep to accommodate a blood pressure apparatus.

3.2.1.3 Carrying handles. The satchel shall be provided with two carrying handles, each 6 inches plus or minus 1/4 inch long. Each handle shall be fabricated of leather as specified in 3.1.2.12, and shall be shaped to fit the hand comfortably when the two handles are together as shown in figure 1. Each handle shall be reinforced with a wire or steel strip looped around two dee-rings attached to the ends of each handle. Each dee-ring shall be firmly attached to a leather ear of suitable shape securely sewn and riveted to the satchel. The leather ears shall be 2-1/2 inches plus or minus 1/4 inch long, 1-1/2 inches plus or minus 1/4 inch wide and, at the loop of the ear, 3/8 plus or minus 1/8 inch high.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the currentversion before use.

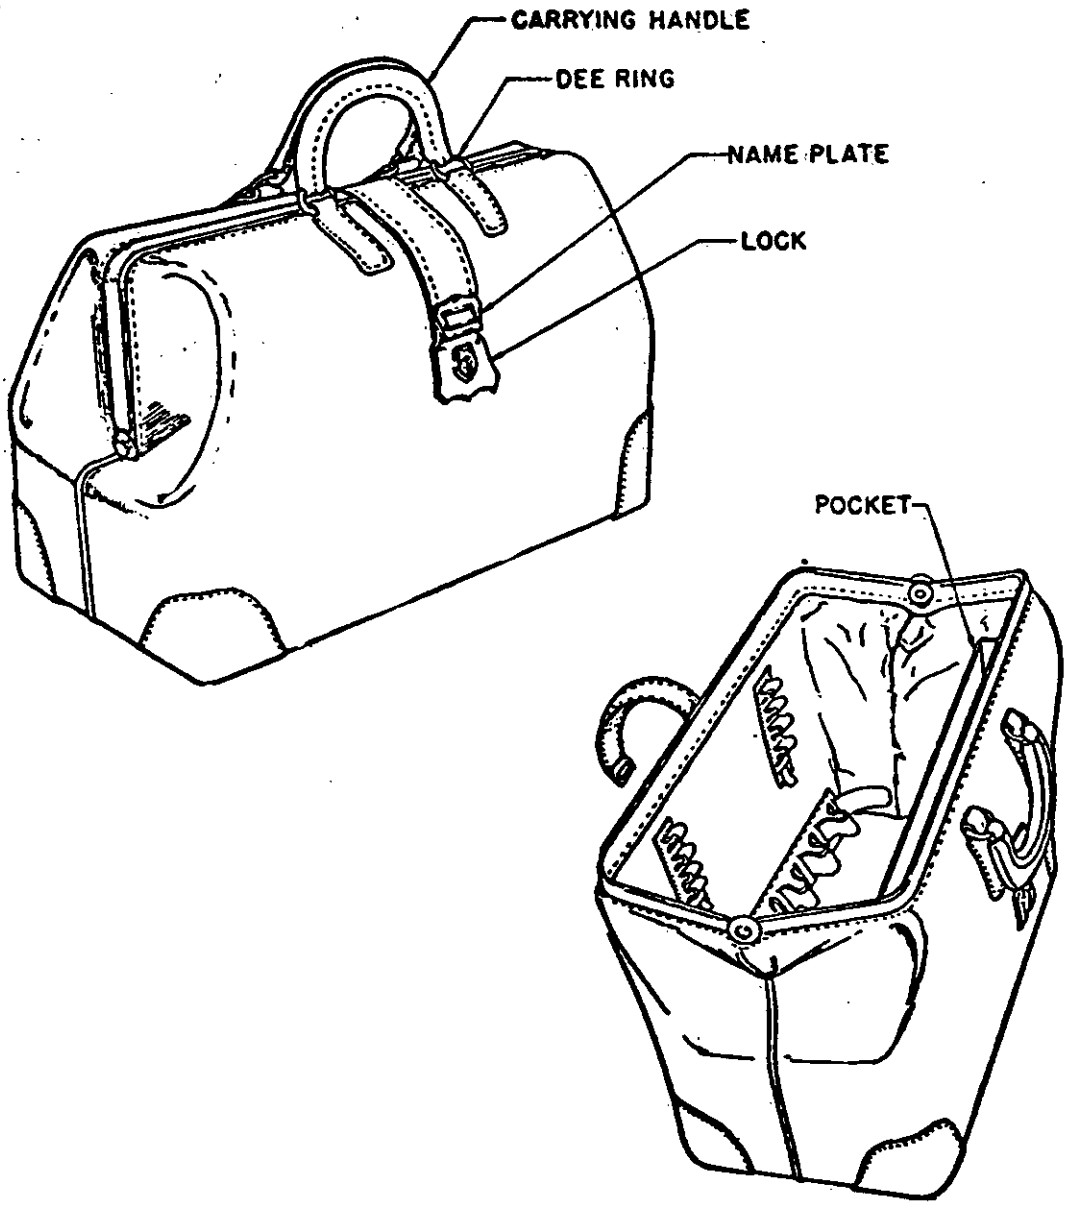


FIGURE 1. Type I, Boston style.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.1.4. Lock and nameplate. The lock shall be secured to the front side of the satchel. The back of the lock on the inside of the bag shall be covered with a piece of buffing leather 4 inches in diameter. The locking member shall be securely attached to a leather strap by riveting. A nameplate 2-3/16 plus or minus 1/16 inches in length by 1/2 plus or minus 1/16 inch in width shall be centered parallel to the long axis of the satchel and 1/2 plus or minus 1/16 inch below the lock. The nameplate shall be fastened securely to the leather by rivets or escutcheon pins. The rivets or pins shall be finished smooth or covered to protect user from injury. The leather strap shall be made of the body leather, of suitable size and shape to fit conveniently between the handles, and shall overlap the center top of the satchel. The opposite end of the leather strap shall be securely attached to the top frame of the satchel. Two keys shall be provided for the lock. The lock and nameplate shall be chromium-finished.

3.2.1.5 Feet. Metal feet shall be attached on each corner on the bottom of the satchel. In addition, one foot shall be attached at the middle of each side on the bottom.

3.2.1.6 Stitching. Stitch type shall be 101 or 301 conforming to Fed. Std. No. 751, with a minimum of five stitches per inch. Stitch type 301 stitches shall be used in all cases where stitching may be done before assembly. Stitch type 101 stitches shall be used for assembly. End seams shall be double-row stitched. All other stitching shall be single-row stitched. At the end of each row of stitches, there shall be at least three backstitches.

3.2.2. Type II, Knickerbocker style.

3.2.2.1 Design. The general design of type II satchel shall be as shown in figure 2 and shall consist of a leather-covered outer case, an aluminum insert, and sufficient spacers to prevent the insert from rattling within the case.

3.2.2.2. Dimensions. The outside dimensions of the satchel shall be 18 inches long, 9 inches wide, and 10 inches high, with a tolerance of plus or minus 1/4 inch in each dimension.

3.2.2.3 Construction.

3.2.2.3.1 Case. The case shall consist of a wooden undercase, covered with leather, lined with plastic covered fabric, and equipped with a carrying handle and hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

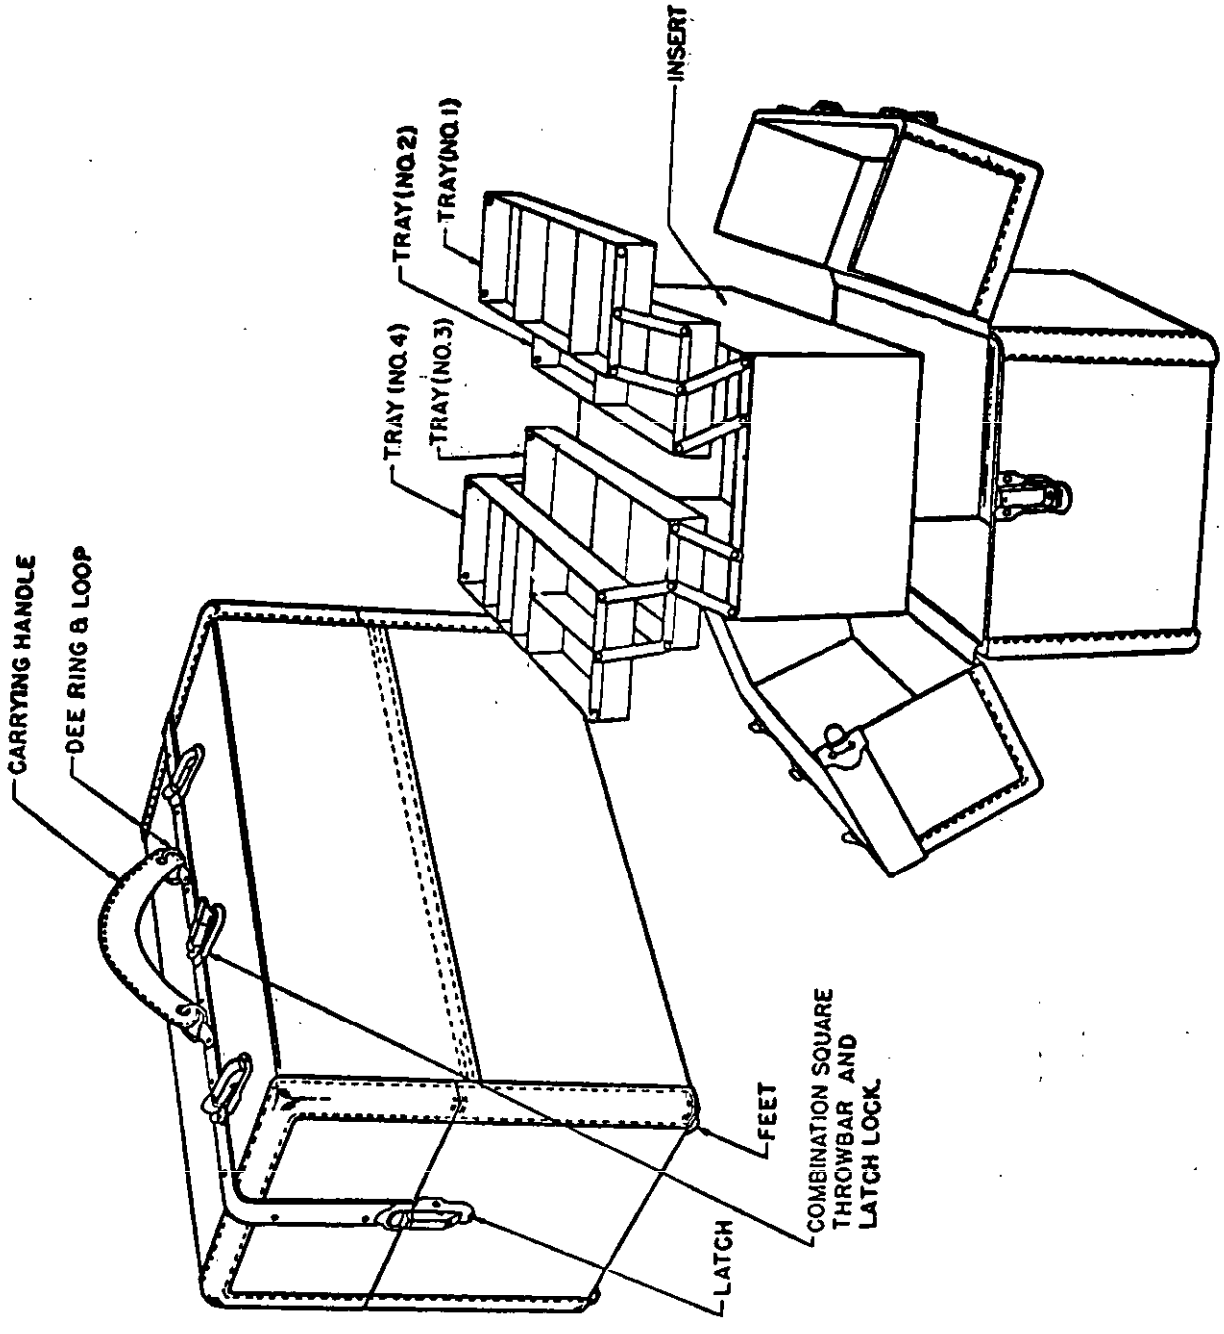


FIGURE 2. Type II, Knickerbocker style.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.2.3.2 Wooden undercase. The wooden undercase shall be fabricated of 3/16 to 1/4 inch plywood top and bottom, 3/16 inch basswood or yellow pine sides and ends, and shall be assembled by lock-cornering and gluing. The undercase shall consist of a body and a cover, the cover being fabricated in two parts. The outside dimensions of the body shall be 17-1/2 inches long., 8-3/4 inches wide, and 5-1/2 inches high; the cover shall consist of two identical sections, the outside of each measuring 17-1/2 inches long, 4-3/8 inches wide, and 4-1/8 inches high; the tolerance on each dimension shall be plus or minus 1/4 inch. Each joint formed by the meeting of two faces on each half of the cover, shall be reinforced with at least two angles, one at each end. The angles shall have 3/4 plus or minus 1/16 legs, by 1/2 plus or minus 1/16 inch long, and shall be fabricated of sheet steel as specified in 3.1.2.11. One leg of the angle shall be attached to each face.

3.2.2.3.3 Leather covering. The undercase shall be covered on the outside with leather. The covering shall be glued and carried over to the inside of the case for a distance of not less than 3/4 inch, wherever possible, and shall be skived at the undercase edges where carried over. The leather on the two sections of the undercase cover shall be carried past one edge and sewed to the body to form a hinge the full length of the case. That part of the covering of the top section of the case of which the hinge is formed shall extend down the body for a distance of at least 3/4 inch from the top edge of the body, and shall be stitched the full length of the case 5/8 plus or minus 1/8 inch down from the top edge of the body. A second row of stitching shall be carried the full length of the case at approximately the top edge of the body (that portion of the covering having the hinge action). The third row of stitching shall be carried in for a distance of at least 2 inches from each end of the case, and shall be located 1/4 plus 1/8, minus 0 inch below the top edge of the body of the case. Prior to stitching, the hinge shall be reinforced by carrying a piece of cotton duck as specified in 3.1.2.4 the full length of the case, from the outside of the body of the case over the top edge of the body and into the inside of each section of the undercase cover. The duck shall extend at least 1 inch down into the body and at least 1 inch into the cover. The duck shall be sewed to the body by the same stitching forming the hinge and shall be glued to the inside of the undercase cover sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.2.3.3 (continued)

The top and side edges of the ends of the case shall be reinforced with leather binding no less than 1-1/2 inches wide (3/4 inch minimum on each face of the case). The binding shall be carried over to the inside of the case, wherever possible, and shall be skived where turned over the edges of the case. All stitched portions shall be reinforced both under the leather covering and inside the case with cotton duck not less than 2-1/2 inches wide (1-1/4 inches minimum on each face). A strip of steel as specified in 3.1.2.11, not less than 1 inch wide shall be riveted to one section of the undercase cover (on the outer surface along the edge forming the closure) so that 1/2 plus or minus 1/8 inch extends beyond the edge, with not less than 10 rivets (six on top and two each side). The strip shall extend the full length and full depth of the cover section and shall be neatly covered with leather to match the case. The leather shall be skived where turned over the edges of the steel strip.

3.2.2.3.4 Hardware and carrying handle.

3.2.2.3.4.1 Hardware. The case shall be fitted with 4 feet, 4 latches, and 1 combination square throwbar and latch lock. Two of the latches shall be mounted on the top of the case equidistant from the center, 3-1/4 inches plus or minus 1/4 inch from the ends of the case to the centerline of the latches. The other two latches shall be mounted on the ends of the case, and shall serve to secure the cover sections of the case to the body. The combination square throwbar and latch lock shall be mounted on the top of the case and shall be centrally located. The male sections of the latches and combination square throwbar and latch lock shall be riveted to the steel strip with two rivets each. The female sections of the latches and combination square throwbar and latch lock shall be riveted to the case with three rivets each. Rivets securing the latches and combination square throwbar and latch lock to the steel strip shall be backed with washers and peened. The feet shall be riveted to the case, one in each corner of the bottom. Two keys shall be furnished for the combination square throwbar and latch lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.2.2.3.4.2 Carrying handle. The case shall be provided with a carrying handle 6 plus or minus 1/4 inches long. The carrying handle shall be fabricated of leather, shall be top stitched, and shall be shaped to fit the hand comfortably. The handle shall be reinforced from dee-ring to dee-ring with wire. The handle shall be secured to the case by means of two dee-rings and two dee-ring loops. Each dee-ring loop shall be riveted to the strip steel with two bur-backed peened rivets. The dee-ring loops shall be 1-3/8 inches plus or minus 1/8 inch long, 3/4 plus or minus 1/8 inch wide, and 3-1/16 inch high.

3.2.2.3.5 Lining. Prior to the insertion of the lining, all turned edges of the leather inside of the case shall be treated with a suitable waterproof sealer (varnish, etc.). The lining material shall then be securely glued into the interior of the case leaving the vinyl-coated side exposed. The lining material shall be so applied as to form reinforcement for the hinges.

3.2.2.3.6 Insert. The case shall be fitted with an insert 16-1/4 inches long, 7-3/4 inches wide, and 8-1/4 inches high with a tolerance of plus or minus 1/8 inch for each dimension. The insert shall consist of a body and four trays linked to the body.

3.2.2.3.6.1 Body. The body of the insert shall be 16-1/4 inches long, 7-3/4 inches wide, and 5-3/4 inches high with a tolerance of plus or minus 1/8 inch for each dimension. All seams shall be lapped (1/2 inch minimum) and spot welded with spot welds not more than 1-1/2 inches on centers. Top edges shall be crimped and hemmed (1/4 inch minimum) outward, except for long edges which shall be crimped and folded inward at an angle of 90° with the vertical.

3.2.2.3.6.2 Trays. Unless otherwise specified tolerances on all tray and compartment dimensions shall be 1/8 inch. Each insert shall be provided with four trays, measuring 16 inches long, 4 inches wide, and 1-1/4 inches high. All edges shall be crimped and hemmed inward (minimum of 1/4-inch hem). The trays shall be partitioned as follows:

Tray, No. 1. Two crosswise partitions dividing the tray into three compartments, one end compartment measuring 4-1/2 inches long and the other end compartment measuring 3-3/4 inches long.

Tray, No. 2. One crosswise partition dividing the tray into two compartments, each 8 inches long.

Tray, No. 3. One crosswise partition dividing the tray into two compartments, one measuring 9 inches long, and the other measuring 7 inches long.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

Tray, No. 4. Four crosswise partitions and one lengthwise partition dividing the tray into six compartments, as follows: End compartment 3 inches long; intermediate compartments, each 2-1/4 inches long, 1-3/4 inches long, and 1-3/4 inches long respectively, and two longitudinal end compartments 6-3/4 inches long by 2 inches wide. All partitions shall be spot welded to the sides of the tray and to the bottom of the tray with welds not less than one inch on centers. Top edges of partitions shall be crimped and hemmed downward (minimum of 1/4-inch hem).

3.2.2.3.6.3 Linkage and arrangement of trays. The ends of the body and the ends of the trays shall be reinforced across the top edge with not less than 1/4 inch-wide and 1/16-inch-thick strip steel. The strip shall be riveted to the body with not less than four rivets each, and to the trays with not less than two rivets each. The rivets shall have spun heads and shall be smoothly finished. The trays shall be linked to the body in such a manner that they may be swung out from the body to facilitate their use and be arranged in two rows of two tiers each. Arrangement of trays shall be as follows, when insert is placed in the case, the side of the insert which will be near the cover section that has the strip of steel along its edge shall arbitrarily be designated as the left side (see figure 2).

Tray No. 1. Upper right (3-3/4-inch compartment to the front).

Tray No. 2. Lower right.

Tray No. 3. Lower left (7 inch compartment to the front).

Tray No. 4. Upper left (6-3/4 inches by 2 inch compartments to the front).

3.2.2.3.7 Spacers. The spacers shall be basswood and shall be covered with lining material as specified in 3.1.2.3.

3.2.2.3.8 Stitching. Stitching shall be as specified in 3.2.1.6.

3.3 Identification markings.

3.3.1 Type I, Boston style. A metal plate, permanently etched or die-stamped with the manufacturer's name or registered trademark shall be secured to the outside surface of the bottom of the satchel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

3.3.2 Type II, Knickerbocker style. A metal plate, permanently and legibly etched or die-stamped with the manufacturer's name or registered trade-mark shall be secured to the inside surface of one of the two parts of the lined case cover. An outer surface of one of the top trays of the aluminum insert shall be permanently and legibly die-stamped with the manufacturer's name or registered trade-mark.

3.4 First Article. When required (see 6.1), prior to the start of production of the contract quantity, one sample of the physician's satchel shall be assembled, completely finished, and tested by the contractor. The sample shall be submitted, together with the contractor's inspection and test reports, to the procuring contracting officer for examination and testing to determine compliance with the requirements of this specification. Written approval of the materials, construction, and performance of the sample shall be obtained from the procuring contracting officer, or his authorized representative, prior to the manufacturer and assembly of the remaining quantity to be manufactured. Pending approval of the first article, either acquisition of materials or components, or commencement of production is at the sole risk if the contractor. Accepted sample shall become the property of the procuring activity and shall be included in the quantity called for in the contract or order. In the event that the sample is not approved, the contractor shall either submit a new sample for approval, or modify the existing sample to remove the deficiencies cited.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

3.6 Workmanship. Workmanship shall be first class throughout. Satchels shall be free from defects which detract from their appearance or may impair their serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Records. Records, examinations, and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the components, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contractor number, the name of the manufacturer or supplier, the FSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and specification requirements. Shall not be limited to the listing of par. 4.4.1.

4.1.3.1 Examination and testing of components and intermediate product. Examination and testing of components and intermediate product shall be done in accordance with paragraphs 4.3.2, 4.3.3, 4.3.3.1, 4.3.3.2, 4.4, 4.4.2 and 4.4.3, as applicable.

4.1.3.2 First article inspection. When required, the first article sample submitted in accordance with 3.5 shall be inspected, as specified in 4.3 for compliance with design, workmanship, and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection. The examinations and tests required to assure conformance of those items or list of items to be offered for acceptance are classified as specified in paragraphs 4.3.4, 4.3.4.1, 4.3.4.2, and 4.3.5.

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in par. 4.3.4.1, 4.3.4.2, and 4.3.5. Unit of production for examination purposes shall be one satchel.

4.2.2 Examination. The satchels shall be examined for defects including, but not limited to, those listed in par. 4.3.4.1.1 and 4.3.5.

4.3 Inspection for acceptance. Inspection shall be in accordance with MIL-STD-105, except where otherwise indicated by Civil agencies.

4.3.1 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.3.2 Examination of components. An examination of components shall be made in accordance with the applicable subsidary specifications referenced herein to the extent applicable, except that this specification shall govern in the event of conflict.

4.3.3 Examination of the intermediate product. An examination shall be made of the plywood lumber and assemblies for visual and dimensional defects. The unit of product for these examinations shall be one undercase immediately prior to the application of leather covering. The sample size shall be selected in accordance with inspection level of MIL-STD-105. The acceptable quality level shall be specified below:

Major - 2.5 defects per 100 units
Total (major and minor combined) - 6.5 defects per 100 units

4.3.3.1 Examination of the intermediate package for visual defects. Defects found during this intermediate examination shall be classified as indicated in table I. Defect designated with an asterisk (*) shall be classified as major when seriously affecting serviceability, and minor when affecting serviceability, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for intermediate package.

Examine	Defect	Classification Major	Classification Minor
Solid wood	Loosened grain, honeycomb, decay, wane, or larva channel	*	
	Not species specified		X
	Wrapped	*	
	Any loose or unsound knot	*	
	Any knot within 1/2 inch of any edge not forming a corner of case or lids		X
	Sound tight knot more than 1/2 inch in diameter		X
Plywood	Not species specified		X
	Any loose or unsound knot or a knot hole	*	
	Veneer splintered	*	
	Veneer delaminated		X
	Warped	*	
Undercase construction and workmanship	Any part missing or not as specified	*	
	Not assembled by lock-cornering or lock-cornering improperly performed	X	
	Gluing improperly performed	X	
	Any reinforcing angle improperly or inadequately attached	*	

4.3.3.2 Examination of the intermediate product for dimensional defects. Any measurement deviating from the nominal dimension and tolerances for the undercase shall be classified as a defect. The acceptable quality level for this examination shall be 4.0 (one class) defects per 100 units. The sample size shall be selected in accordance with inspection level S-3 of MIL-STD-105.

4.3.4 Inspection of the end item. An examination shall be made of the finished satchels for visual and dimension defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.3.4.1 Examination of the end item for visual defects. The defects found during this examination shall be classified in accordance with 4.3.4.1.1. The sample unit for this examination shall be one completely fabricated satchel. The lot size shall be expressed in terms of one satchel. The sample size shall be selected in accordance with inspection level II of MIL-STD-105. The acceptable quality levels shall be as specified below:

Major - 2.5 defects per 100 units
Total (major and minor combined) - 6.5 defects per 100 units

4.3.4.1.1 Classification of defects. The satchels shall be examined for defects in color, type, design, material, workmanship, and marking. Defects designated with an asterisk (*) in table II shall be classified as major when seriously affecting serviceability or appearance, and minor when affecting serviceability or appearance, but not seriously.

TABLE II. Classification of defects for end item.

Examine	Defect	Classification Major	Minor
Color and finish	Color not as specified	X	
Leather components	Color not uniform		*
	Finish of leather not as specified	X	
Thread	Color does not approximate color of case		X
Metal components	Not specified finish		X
	Color not as specified		X
Cleanness	Any nonpermanent spot or stain, i.e., cement or foreign matter, that is clearly noticeable, but can be readily removed with a cleaning agent		X
	Any permanent type stain or spot clearly noticeable, that cannot be removed with a cleaning agent		*
Design	Any characteristic not in accordance with the specified requirements	X	
Type	Not type specified	X	
Material			
General	Any component or assembly not fabricated of the specified material	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for end item - continued.

Examine	Defect	Classification Major	Minor
Quality of leather	Not full or corrected grain (N/A alt. matl. Type I)	X	
	Any hole, cut or rupture	X	
	Any of the following imperfections present to a degree where the condition will have a serious effect on serviceability or appearance: open grub or tick marks, open or badly healed scratches, brands, boney, loose or pipey leather, or otherwise defective, e.g., open satchel on exterior surface of satchel	X	
	Any of the following imperfections present to a degree where the condition will affect serviceability or appearance, but not seriously: Grub or tick marks, healed scratches, brands, boney, loose or pipey leather, or otherwise defective		X
	Flaky, spongy, or stretchy leather		*
	Fat wrinkles		*
Construction and workmanship General (applicable to all component and assemblies unless otherwise indicated herein)	Any component missing or not as specified	X	
	Any part fractured, ripped torn, punctured, malformed or otherwise damaged		*
	Any operation omitted, improperly performed, or not in accordance with acceptable commercial practice		*
	Any component misplaced or assembly malformed		*
	Satchels not fabricated with grain side of leather on exterior surfaces	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for end item. - continued

Examine	Defect	Classification Major	Minor
	Any functioning part that will not operate as intended or requires abnormal force to operate	*	
	Any leather edge not skived or finished as required	*	
Metal components General	Machine or die mark affecting appearance		X
	Finish not even or otherwise imperfect	*	
	Dented, damaged, or malformed	*	
	Any hole where hole is not required		X
	Any hole missing where required		X
	Component loose or insecurely fastened	X	
	Any rough or sharp edge, burr, fin, metal splinter, or sliver that may be injurious to user	X	
Workmanship and attachment of rivets, burrs and washers	Any rivet not securely set or clinched to a degree where it may become detached	X	
	Any rivet not securely set or clinched but is adequately retained to a degree where it is not expected to become detached		X
	Any rivet, burr, or washer not type or size specified or not suited for intended purpose		X
	Head of any rivet broken off or bent over		X
	Peening of any rivet producing a rough surface or unnecessarily high projection on interior of satchel or insert assembly		X
	Any rivet missing	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for end item. - continued.

Examine	Defect	Classification Major	Minor
Workmanship and attachment of rivets, burrs burrs and washers, Cont'd	Any rivet reversed, i.e., head of rivet is not on the side of the component as specified or in keeping with commercial practice		X
	Burr missing where required or necessary	X	
Lock	Lock does not function or both keys missing or both keys will not operate lock	X	
	One lock key provided which operates lock		X
	One lock key provided which does not operate lock	X	
Seams and stitching	Not specified stitch type	X	
	Gauge of stitching irregular	*	
	Loose stitch tension resulting in a loosely secured seam	X	
	More than three continuous stitch locks exposed on surface of leather but seam is tight		X
	Tight stitch tension, i.e., stitches rupture leather or may break in use of end item	X	
	Any restitched seam affecting appearance or serviceability	*	
	More than two continuous needle holes visible as a result of removal of threads		X
	Any row of stitching omitted	X	
	Five stitches per inch in lieu of 6 to 8 stitches per inch		X
	Four or less stitches per inch	X	
	More than eight stitches per inch damaging leather	X	
	Thread ends not trimmed		X
	Any open seam	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for end item. - continued.

Examine	Defect	Classification Major	Minor
Seams and stitching (Cont'd)	Note: When one or more stitches are broken, or two or more consecutive skipped stitches or runoffs occur on a single stitched seam, or on both rows of stitching on a double-stitched seam, it shall be classified as a major defect. When one or more stitches are broken, or two or more stitches are broken, or two or more consecutive skipped stitches or runoffs occur on only one row of a double stitched seam, it shall be classified as a minor defect.		
	Not backstitched where necessary to secure end of of seam or backstitched with less than three stitches		X
Assembly highlights	Frame warped, bent, or malformed preventing satisfactory closing of of satchel	X	
	Undue tension or looseness of leather strap in locking satchel	X	
	Carrying handles do not fit comfortably		*
	Lock sections not securely attached	X	
	Pocket, loops, or adjusting straps not arranged as specified	X	
Assembly highlights Type II satchel	Undue tension or looseness of latches or lock in closing satchel	X	
	Any area of leather covering not securely adhered to undercase		*
	Binding not neatly accomplished		*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for end item. - continued.

Examine	Defect	Classification Major	Minor
Assembly highlights type II satchel, continued	Any cotton duck reinforcing piece omitted under stitched areas		X
	Steel strip not placed or attached as specified	*	
	Leather covering of steel strip not neatly applied	*	
	Lining not applied as specified, or not completely adhered		
	Carrying handle does not fit the hand comfortably	X	
Assembly highlights insert assembly for type II satchel	Any defect of design or fabrication which causes difficulty in operation of moving parts	X	
	Any fault in assembly which may cause further damage or deterioration of moving parts, e.g., any spacer washer omitted in linkage of trays causing unnecessary wear between links and trays		
	Tray or body insert warped or bent out of shape	*	
	Assembly not connected or joined as specified	X	
	Trays or partitions within trays not arranged as specified	X	
	Edges of body or trays or partition not crimped or folded as specified	*	
	Any spot weld missing, inadequate, or unsightly		X
Marking	Missing, incomplete, incorrect, not legible not specified size, not in proper location, or not accomplished as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.4 Component testing. In addition to the quality assurance provisions of subsibiary specifications, testing shall be performed on the lining of type II satchel for the test characteristics listed in table III. The lot size shall be expressed in terms of full width yards. The requirement paragraph is 3.1.2.3. The requirements apply to the sample unit which is one yard full width. The sample size shall be selected in accordance with level S-1 of MIL-STD-105. The acceptable quality level shall be 6.5 (one-class) defects per 100 units.

Table III. Test methods.

Characteristic	Test method	No. determ per sample unit	Results reptd. as
Chip-resistance	Fed Test Method-191 Std Comm'l	1	pass or fail
Waterproofness	Std Comm'l	1	pass or fail
Alcohol resistance	Std Comm'l	1	pass or fail
Coating identification	Std Comm'l	1	pass or fail
Weight of drill cloth	CCC-T-191 5041	5	0.1 ounce per sq. yard
Thread count of drill cloth	5050	5	No. per inch
Drill cloth dye identification	Std. Comm'l	1	pass or fail
Weight of coating	See 4.4.3	3	0.1 ounce per sq. yard
Weight of finished material	5041	5	0.1 ounce per sq. yard
Thread count of material	5050	5	No. per inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

4.4.1 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

TABLE IV. Certificates of quality.

	Component	Charactertisic	Rqmt. para.
Type I satchel	Frame	Electro-zinc coating	3.1.1.4
	Dee-rings and rivets	Nickel-plating	3.1.1.5
	Feet	Black oxidized finish	3.1.1.5
	Steel wire or strips	Cadmium or zinc plating	3.1.1.6
Type II satchel	Dee-rings, dee-ring loops, and rivets	Nickel-plating	3.1.2.6
	Feet	Black oxidized finish	3.1.2.6
	Glue	Water-resistance and suitability	3.1.2.9

4.4.2 Chemical analysis of the metals. The samples selected in accordance with 4.4 shall be analyzed in conformance with methods 111 or 112 of Fed Test Method Std. No. 151. In case of dispute, method 111 shall be used for referee analysis.

4.4.3 Weight of vinyl coating. The weight of the vinyl coating on the lining specified in 3.1.2.3 shall be determined by removing the coating from the coated cloth as follows:

Soak the uncoated side of a weighed sample of the coated cloth with cyclohexanone or other solvent to assist in stripping the coating from the cloth. Immerse the cloth from which the coating has been removed in hot cyclohexanone (approximately 180° F.) for 2 to 5 hours and then rinse throughly in methyl ethyl ketone and dry and reweigh. The loss in weight of the sample will indicate weight of coating.

4.5 Inspection of packaging. The sampling and inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.1).

5.1.1 Level A.

5.1.1.1 Unit package. Each satchel shall be closed, latched and the keys securely tied to the carrying handle. Each satchel shall be wrapped in Kraft paper or shall be inserted into polyethylene bag of suitable weight. The Kraft paper or polyethylene bag shall be secured by the use of tape or other suitable means. Each wrapped or bagged satchel shall be further packaged in a close-fitting box conforming to PPP-B-636, type CF, class domestic. Closure shall be as specified in the applicable box specification.

5.1.2 Level C. The level C preservation for satchel shall conform to the MIL-STD-794 requirements for this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 Level A. Four satchels of one type only shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, overseas type or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall be as specified in the liner specification. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in PPP-B-636.

5.2.2 Level B. Four satchels of one type only shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-601, domestic type, PPP-B-621, class 1 or PPP-B-636, class domestic. CLosure shall be as specified in the applicable box specification.

5.2.3 Level C. The level C packing for satchels shall conform to the MIL-STD-794 requirements for this level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

5.2.4 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.2.5 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not exceed 43 inches in length, 52 inches in width, and 54 inches in height. Pallet shall conform to type IV or type V.

5.2.5.1 Levels A and B. Satchels of one type only packed as specified in 5.2.1 and 5.2.2 shall be unitized on pallets conforming to MIL-STD-147.

5.2.5.2 Level C. Satchels packed as specified in 5.2.3 shall be unitized as specified in 5.2.5.

5.3 Marking.

5.3.1 Civil agencies. Each unit package, exterior container and unitized load shall be marked as specified in FED-STD-123.

5.3.2 Military activities.

5.3.2.1 Level A, B, and C. Each unit pack, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

5.4.2 Packaging inspection. The inspection of these packaging requirements shall be in accordance with 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type required (see 1.2).
c. Color if other than specified (see 3.1.1.10 and 3.1.2.14).
d. When first article is required (see 3.5).
e. Where first article shall be sent, when required (see 3.5).
f. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 Dorine cardboard, natural color, .020 weight is available from the Montrose Paper Company.

6.3 The following National Stock Numbers are covered by this document:

Type I - 6532-00-308-8200
Type II - 6532-00-308-8225

MILITARY INTERESTS:

Custodians:
Army-MD
Navy-MS
Air Force-03

PREPARING ACTIVITY:

DOD-MD

Agent:

DLA-DM

Project No.: 6532-1164

Location:

FEDSP/SATCHELS/PHYSICANS/H15-27

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 704-034/14198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4956 WASHINGTON D C.
POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC- RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
KK-S-151C	SATCHELS, PHYSICIAN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 92 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:56Z
Check the source to verify that this is the current version before use.