INCH-POUND

MIL-P-52258C
6 April 1992
MIL-P-52258B
18 May 1981

MILITARY SPECIFICATION

PICKETS, STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel pickets to be used as ground anchor or holdfast.

1.2 Classification. The pickets shall be of the following types as specified (see 6.2).

Type I - 1-1/4 inch diameter by 36 inches long.
Type II - 1-1/4 inch diameter by 42 inches long.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5420

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:11Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-T-704	-	Treatment and Painting of Materiel.

STANDARDS

FEDERAL

FED-STD-595	-	Colors.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-889	-	Dissimilar Metals.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 108	-	Steel Bars, Carbon, Cold-Finished, Standard Quality.
D 4675	-	Selection and Use of Flat Strapping Materials.
D 3953	-	Strapping, Flat and Seals.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:11Z
Check the source to verify that this is the current version before use.

AMERICAN WELDING SOCIETY (AWS)

A5.1 - Covered Carbon Steel Arc-Welding Electrodes.
A5.18 - Carbon Steel Filer Metals for Gas Shield Metal-Arc Welding.
D1.1 - Structural Welding Code-Steel.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 N.W. 7th Street, Miami, FL 33125.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section Qualification Standard for Welding and Brazing Procedures, Welders, Brazers and Welding and Brazing Operators.

(Applications for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC. AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., ATTN: Traffic Order Section, 2200 Mill Rd, Alexandria, VA 22314.)

UNIFORM CLASSIFICATION COMMITTEE AGENT

Uniform Freight Classification Rules.

(Application for copies should be addressed to Uniform Classification committee, ATTN: Tariff Publishing Officer, RM 1106, 222 S. Riverside Plaza, Chicago, IL 60606.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The picket shall be as shown on the applicable figure and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.3 Material. Material shall be as shown on the applicable figure and as specified herein (see 6.4).

3.3.1 Material deterioration prevention and control. The item shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the item may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.3 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.4 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the item may be newly fabricated from recovered materials to the maximum extent practicable, provided the item produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the item.

3.4 Identification marking. The picket shall be metal-die stamped as shown on the figure. Die stamping shall be legible after painting.

3.5 Treatment and painting. The picket shall be cleaned, treated, and painted in accordance with MIL-T-704, type B. The color number designation shall be 34088 in accordance with FED-STD-595.

3.6 Type I, 1-1/4 inch diameter by 36 inch long picket. The type I picket shall be as shown in figure 1.

3.7 Type II, 1-1/4 inch diameter by 42 inches long. The type II picket shall be as shown on figure 2.

3.7.1 Welding electrodes. Welding electrodes shall conform to AWS A5.1 or A5.18, classification E60 or E70 Series, size as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

3.8 Workmanship.

3.8.1 Steel fabrication. Steel used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.8.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Unless otherwise specified (see 6.2), the welding process used in fabrication of the (pickets) shall be at the option of the contractor. All welded parts shall be free from cracks and other imperfections that may reduce the effectiveness of the part. Welding procedures shall be qualified in accordance with applicable ASME or AWS code, and all welding and welds shall be in accordance with ASME or AWS code.

3.8.3 Welders or welding operators. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall obtain certification that the welder or welding operator has passed qualification tests as prescribed by either of the following listed codes for the materials to be joined and for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

AWS D1.1, Structural Welding Code-Steel
ASME Boiler and Pressure Vessel Code, Section IX

In the event of evidence of poor welds, the Government reserves the right to require recertification of any welder or welding operator. The test results shall be made available for review by the contracting officer or the contracting officer's representative.

Contractors who make only horizontal welds need not qualify welders for "all position welding". The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS or ASME codes.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:11Z
Check the source to verify that this is the current version before use.

are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article picket shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling for examination. Sampling for examination shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I and table IIa. A lot shall be accepted when zero defects are found.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1.

4.5 Inspection procedure.

4.5.1 Examination. The picket shall be examined as specified herein for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

Major

101. Nonconformance to the dimensions shown on the applicable figure (see 3.1).
102. Material not as specified (see 3.3).
103. Workmanship not as specified (see 3.8).
104. Identification marking incorrect, missing, or illegible (see 3.4).
105. Treatment and painting not as specified (see 3.5).
106. Welding and welds not as specified (see 3.8.2).
107. Welders and welding operators not certified as specified (see 3.8.3).
108. Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment as specified (see 3.3.1).
109. Dissimilar metals as specified in MIL-STD-889 are not effectively insulated from each other as specified (see 3.3.2).
110. Contractor does not have documentation available for identification of material, material finishes, or treatments (see 3.3.3).
111. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the item (see 3.3.4).

4.6 Inspection of packaging.

4.6.1 Unit of product. For the purpose of inspection, a complete pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105. Sample size shall be determined by using MIL-STD-105, table I and table IIa. A lot shall be accepted when zero defects are found and rejected when one or more defects are found.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. A lot shall be accepted when zero defects are found and rejected when one or more defects are found.

112. Pickets of unlike description packed together, for the level A or B (see 5.1.1 and 5.1.2).
113. Boxes not in accordance with the referenced document for level A or B (see 5.1.1 and 5.1.2).
114. Boxes not reinforced as specified for level A or B (see 5.1.1 and 5.1.2).
115. Strapping not zinc coated for level A (see 5.1.1).
116. Gross weight of each box exceeds 250 pounds for level A or B (see 5.1.1 and 5.1.2).
117. Marking missing, illegible, incomplete or incorrect (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. The pickets of like description shall be packed in quantities not to exceed 250 pounds gross weight. The container shall be a close-fitting box conforming to PPP-B-621, class 2, style 2, for type 3 load. The ends of the box shall be reinforced by the addition of boards covering the entire inner face of each end. The reinforcing boards shall be the same thickness as the end boards, shall be placed with the grain direction at right angles to that of the end boards, and shall be nailed to them with nail clinched. The pickets shall be packed in layers with the ends alternated in each layer. The sides, top, and bottom of the box shall be nailed to the reinforcing boards in addition to the nailing required by the box specification. The boxes shall be closed in accordance with the appendix to the box specification. Strapping shall be in accordance with ASTM D 3953, type 1 or type 2, zinc coated, size as applicable and ASTM D 4675.

5.1.2 Level B. The pickets shall be packed as specified in 5.1.1 for level A except the box shall be class 1 and strapping shall not be required to be zinc coated.

5.1.3 Level C. The pickets shall be packed to ensure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.2 Marking. In addition to any special marking specified in the contract or purchase order (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pickets are intended for use in the ground anchorage or holdfast system of floating and fixed bridges. This item is a component of the following supply Catalogs: SC 3835-97CL-E05, SC 5420-97CL-E28, E35, E36, E41, E42, E46 and E51.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Type required (see 1.2).
d. Time frame required for submission of preproduction model (see 3.2).
e. Level of packing required (see 5.1).
f. Any special marking required (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

6.3 Level of preservation. Preservation is not included as the pickets do not require any additional preservation. For the purpose of marking, preservation shall be designated level A.

6.4 First article. When a first article inspection is required, the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Subject term (key word) listing.

Anchor
Post
Holdfast system

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
Navy - MC
DLA - CS

Project 5420-0198

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

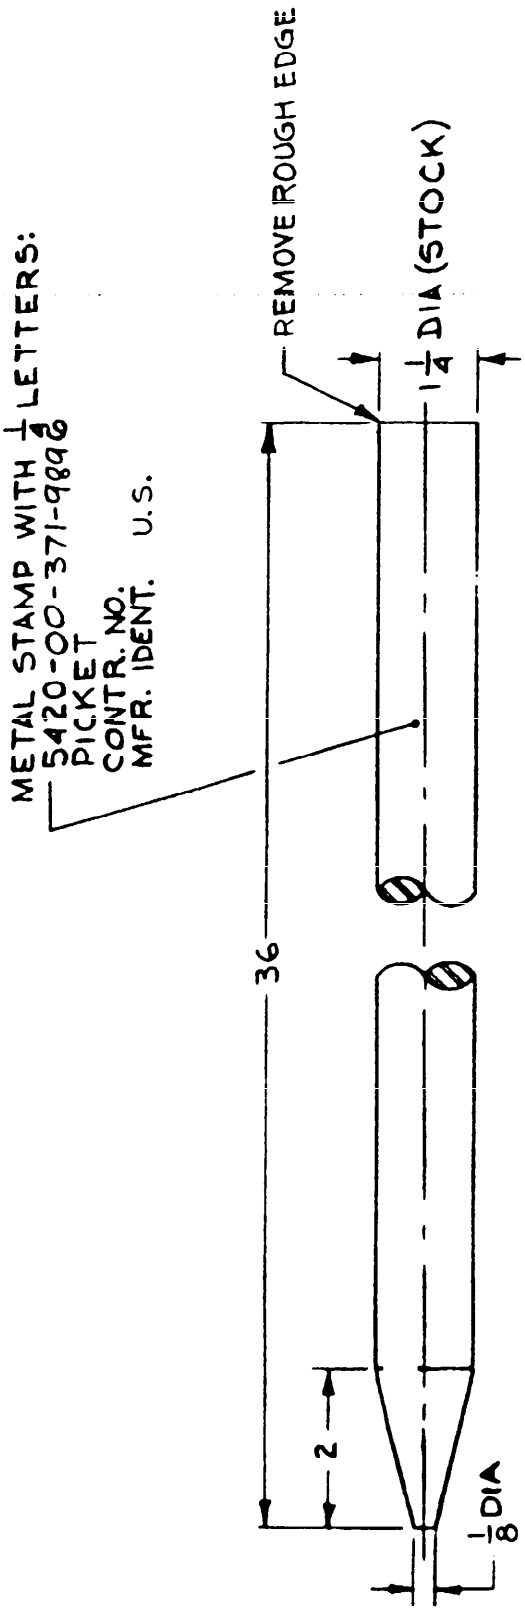

NOTE:
1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES $\pm \frac{1}{16}$

MATERIAL: STEEL, ASTM A108, UNS G 10180-G 10250

FIGURE 1. Picket, steel, Type I.

X-24528

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

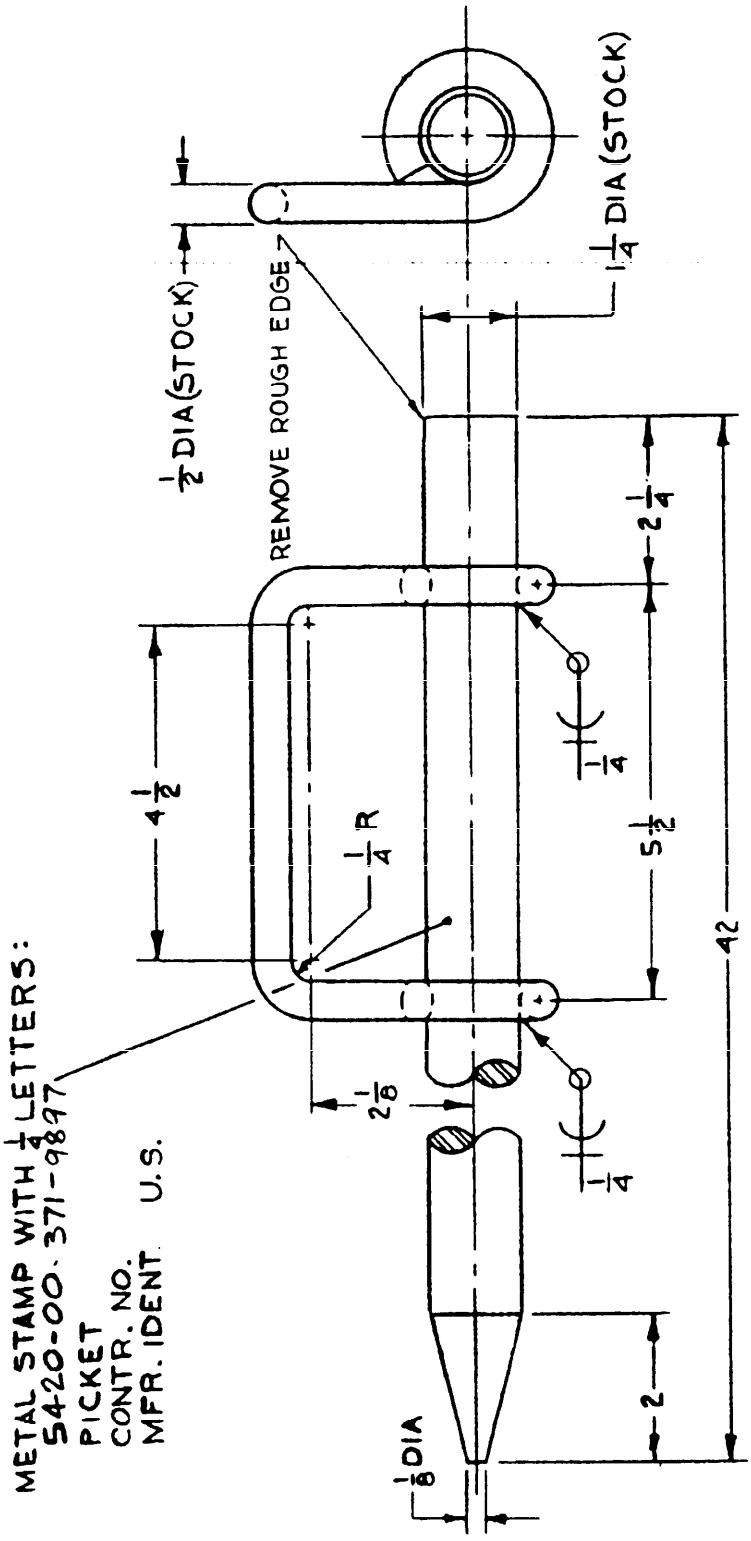


FIGURE 2. Picket, steel, Type II.

X-24453B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
   The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-P-52258C	2. DOCUMENT DATE (YYMMDD) 920406

3. DOCUMENT TITLE Pickets, Steel

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Gerry Harlow	b. TELEPHONE (Include Area Code) (1) Commercial (703) 704-3469	(2) AUTOVON 654-3469
c. ADDRESS (Include Zip Code) US Army Belvoir RDE Center ATTN: STRBE-TSE Fort Belvoir, VA 22060-5606	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.