A-A-1350A
January 18, 1989
SUPERSEDING
A-A-1350
January 14,1980

COMMERCIAL ITEM DESCRIPTION

WRENCH, FLARE NUT, SINGLE HEAD, MODIFIED 12-POINT

The General Services Administration has authorized the use of this Commercial Item Description in preference to Type XIV, of Federal Specification GGG-W-636.

This commercial item description covers a single head wrench suitable for use with hexagonal flare nuts.

Salient characteristics:

Material:	Forged steel, Rockwell C hardness of 42 minimum, 52 maximum.
Torsion Load:	Wrenches shall be tested to determine the capability of meeting the test loads in the table herein.
Finish:	Shall be chromium plated. Head peripheral shall not be more than 63 microinches. All other surfaces shall not be more than 125 microinches, as specified in ANSI B46.1, and shall be capable of passing surface adhesion test herein.
Marking:	Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to the head as practicable and with manufacturer's name or trademark, and country of origin.
Wrench Opening:	Wrench opening shall be a standard 12 point (double hexagon) except that it shall be provided with a slotted opening to fit over tubing. Sharp edges shall be chamfered or rounded to eliminate burrs. Sized to pass the gaging requirements of ANSI B107.17M for the size specified for the National Stock Number (NSN) as shown in the table below.


Stock Number	Wrench opening (distance across flats) (Inches)	Diameter of head (max.) (Inches)	Circumferential opening B (min.) (Inches)	Thickness of head (max.) (Inches)	Length overall (max.) (Inches)	Test loads (min.) (In.-lbs)
5120-00-224-3155	3/8	13/16	9/32	5/16	6-1/2	-
5120-00-224-3156	7/16	7/8	11/32	11/32	6-1/2	150
5120-00-224-3157	1/2	15/16	3/8	7/16	6-7/8	200
5120-00-224-3158	9/16	1-1/32	7/16	7/16	6-7/8	275
5120-00-224-3159	5/8	1-1/8	1/2	15/32	7-1/8	325

FSC-5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Stock Number	Wrench opening (distance across flats) (Inches)	Diameter of head (max.) (Inches)	Circumferential opening B (min.) (Inches)	Thickness of head (max.) (Inches)	Length overall (max.) (Inches)	Test loads (min.) (In.-lbs)
5120-00-224-3160	11/16	1-13/64	9/16	1/2	7-1/8	400
5120-00-224-3161	3/4	1-9/32	5/8	9/16	7-1/2	500
5120-00-224-3162	13/16	1-3/8	5/8	5/8	7-1/2	625
5120-00-224-3163	7/8	1-7/16	11/16	5/8	7-3/4	800
5120-00-224-3164	15/16	1-17/32	3/4	5/8	7-3/4	1,000
5120-00-224-3103	1	1-19/32	3/4	11/16	7-7/8	1,200
5120-00-224-3104	1-1/16	1-11/16	13/16	3/4	9	1,450
5120-00-224-3105	1-1/8	1-25/32	7/8	25/32	10	1,450
5120-00-224-3106	1-3/16	1-7/8	15/16	13/16	11	1,725
5120-00-277-2696	1-1/4	1-15/16	1	27/32	12	1,900
5120-00-277-2697	1-3/8	2-3/32	1-1/16	29/32	13-1/16	2,050
5120-00-277-5071	1-7/16	2-3/16	1-1/8	15/16	13-1/8	2,200
5120-00-277-5072	1-1/2	2-9/32	1-1/8	31/32	13-1/8	2,550

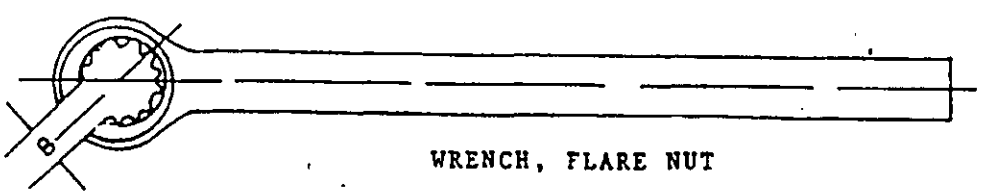

WRENCH, FLARE NUT

Illustration. The illustration herein is descriptive and not restrictive and is not intended to preclude the purchase of Wrench, Flare Nut, Single Head, Modified 12-Point otherwise conforming to this Commercial Item Description.

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair serviceability, durability or appearance. The edges and corners of the wrench shall be clearly defined and smoothly finished with no evidence of broaching tears on the working surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Quality assurance provisions. Sampling for inspection and testing. Sampling shall be in accordance with MIL-STD-105 ,Sampling Procedures and Tables for Inspection by Attributes. The lot size shall consist of all wrenches offered for acceptance at one time. The sample unit is one wrench.

A. Visual examination. The inspection level shall be S-4 with an acceptable quality level (AQL) of 4.0 percent defective.

B. Dimensional examination. The inspection level shall be S-3 with an acceptable quality level (AQL) of 4.0 percent defective.

C. Testing for hardness. The inspection level shall be S-3 with an AQL of 4.0 percent defective. Testing shall be performed in accordance with ASTM E18.

D. Torsion test load. Wrenches shall withstand the test loads specified in applicable table herein without failure or permanent deformation which might effect the durability and serviceability of the wrenches. The inspection level shall be S-3 with an AQL of 4.0 percent defective.

E. Surface coating adhesion test. The wrenches shall be examined for surface adhesion as specified in paragraph 9, Heat Quench Test, of ASTM B571-84, Standard Test Methods for Adhesion of Metallic Coatings. The inspection level shall be S-3 with an AQL of 1.5 percent defective.

F. Examination for preparation for delivery. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers in the inspection lot. Inspection level shall be S-2 with an AQL of 2.5 expressed in terms of defects per hundred units.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order. (For use by GSA; optional for other agencies.) DoD may use Commercial Packaging Standard ASTM D3951.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:13Z
Check the source to verify that this is the current version before use.

Notes: The issue of referenced documemts in effect on the date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by the Contracting Officer.

ANSI standards are available from the American National Standards Institute, 1430 Broadway, New York, NY 10018.

ASTM test method is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

Military Standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS

Military Coordinating Activity

Army-GL

Custodians

Army-GL
Air Force-99

Review Activity

Air Force-84

User Activities

Army-MB, ER
Navy-MC

PREPARING ACTIVITY

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:13Z
Check the source to verify that this is the current version before use.