COMMERCIAL ITEM DESCRIPTION

WRENCH, BOX (NONSPARKING AND NONMAGNETIC)


The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers box wrenches made of a nonferrous alloy having a low sparking hazard and a low magnetic permeability.

Salient characteristics:

Design. The box wrenches shall be of the 12-point (double hexagon) design with 15 degree (plus or minus 5 degrees) offset wrench heads on each end and shall be capable of withstanding a torsion load as shown in the table below without formation of a permanent set exceeding 5 degrees, formation of cracks, or fracture of heads or handles, and without perceptible indentation or gouging of the bearing surface of the serrations.

Dimensions shall be as follows:

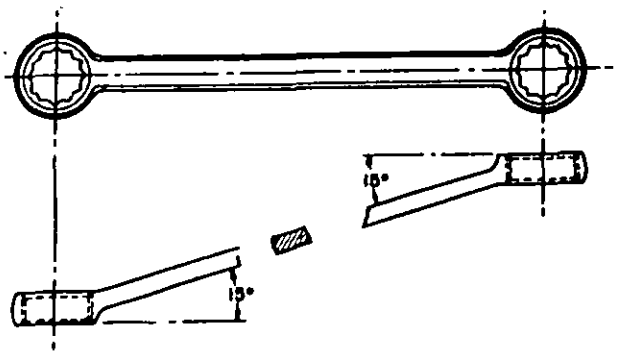

National Stock Number (NSN)	Wrench Opening Sizes (Inches) Small head Nom.	Small head Min.	Small head Max.	Large head Nom.	Large head Min.	Large head Max.	Minimum Overall Length
5120-00-277-5781	7/16	0.440	0.446	1/2	0.503	0.509	7 inches
5120-00-274-9653	1/2	0.503	0.509	9/16	0.566	0.573	8 inches
5120-00-274-9655	9/16	0.566	0.573	5/8	0.629	0.636	9 inches
5120-00-274-9657	11/16	0.692	0.699	25/32	0.786	0.794	10 inches
5120-00-274-9658	3/4	0.755	0.763	7/8	0.880	0.888	12 inches
5120-00-293-0083	13/16	0.817	0.825	7/8	0.880	0.888	12 inches
5120-00-274-9661	1	1.006	1.015	1-1/8	1.132	1.142	14 inches

Minimum torsions loads shall be as follows:

National Stock Number (NSN)	Minimum Torsion Load (In.-Lb.) Small Head	Large Head
5120-00-277-5781	420	660
5120-00-274-9653	660	1220
5120-00-274-9655	1220	1400
5120-00-274-9657	1400	2025
5120-00-274-9658	1700	2510
5120-00-293-0083	2210	2510
5120-00-274-9661	3570	4890

FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; disstribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:23Z
Check the source to verify that this is the currentversion before use.

Material. The wrenches shall be forged or cast of beryllium copper or aluminum bronze alloy having an iron content not over five percent, and when present, it shall be well diffused throughout the alloy. When tested with a magnetic permeability indicator conforming to Military Specification MIL-I-17214, the magnetic permeability shall not be above 1.2 on the indicator scale.

Workmanship. Wrenches shall be smoothly finished and free from burrs and rough edges. Wrench openings shall be smooth and well defined.

Marking. Each wrench shall be marked in a plain and permanent manner with the wrench sizes, name, abbreviation, or chemical symbol of the alloy, the manufacturer's name or identifying symbol, part number, and the country of origin.

Quality assurance provisions. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all wrenches offered for acceptance at one time. A sample unit shall be one wrench.

A. Examination for design, dimensions and workmanship. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective.

B. Material. Material shall be ascertained by manufacturer's certification.

C. Torsion moment test. Torsion moment testing shall be in conformance with commercially accepted procedures. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for referenced documents may be determined by contacting the Contracting Officer.

MILITARY INTERESTS:

NONE: DoD has determined that no military activity has an official interest in this commercial item description.

PREPARING ACTIVITY:

GSA=FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.