A-A-2491
August 15, 1988

COMMERCIAL ITEM DESCRIPTION


WRENCH, BOX AND OPEN END, COMBINATION
(NONSPARKING AND NONMAGNETIC)

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers one size combination wrench assigned National Stock Number (NSN) 5120-00-542-2425 made of a nonferrous alloy having a low sparking hazard and a low magnetic permeability.

Salient characteristics:

Design and dimensions: Shall be of the combination configuration similar to the illustration below with an open end wrench opening on one end and a 12 point box opening on the opposite end. Both openings shall be a nominal 3/8 inch size with tolerances such as to insure acceptance when gaged with "GO" and "NO-GO" hexagonal-shaped gages with widths across flats of 0.3770 and 0.3843 inch, respectively. Overall length shall be 4-3/16 inches, minimum.

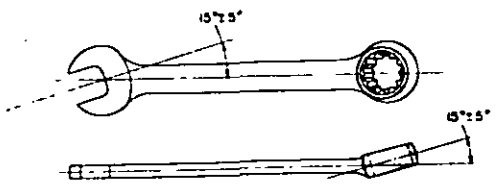

Material. The wrench shall be made of beryllium copper or aluminum bronze alloy having an iron content not over five percent, and when present, it shall be well diffused throughout the alloy. When tested with a magnetic permeability indicator conforming to Military Specification MIL-I-17214, the magnetic permeability shall not be above 1.2 on the indicator scale.

Torsion load. The box end of the wrench shall be capable of withstanding a torsion load of 275 inch-pounds, and the open end capable of withstanding a torsion load of 160 inch-pounds without formation of a permanent set exceeding 5 degrees, formation of cracks, or fracture of heads or handles, and without perceptible indentation or gouging of the wrenching surfaces.

Workmanship. The wrench shall be smoothly finished and free from burrs and rough edges or other imperfections which may impair the appearance, serviceability, or durability.

Marking. Each wrench shall be marked in a plain and permanent manner with the with the wrench size, name, abbreviation, or chemical symbol of the alloy, the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined, and the country of origin.

FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; disstribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

Quality assurance provisions. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all wrenches offered for acceptance at one time. A sample unit shall be one wrench.

A. Examination for design, dimensions and workmanship. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective.

B. Material. Material shall be ascertained by manufacturer's certification.

C. Torsion moment test. Torsion moment testing shall be in conformance with commercially accepted procedures. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

MILITARY INTERESTS:

NONE: DoD has determined that no military activity has an official interest in this commercial item description.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.