A-A-2525
January 5, 1987

COMMERCIAL ITEM DESCRIPTION

CHALK LINE AND REEL (SELF-CHALKING)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification GGG-C-291.

This commercial item description covers a chalk line and reel of the self-chalking type used for marking construction lines, assigned National Stock Number (NSN) 5210-00-273-9793

Salient characteristics:

Material. The material used in the manufacture of chalk lines and reels, self-chalking, shall be of a good quality and shall conform to the requirements hereinafter specified. The material shall be free from defects and imperfections that may affect the serviceability of the finished products.

Marking. Each chalk line and reel shall be marked in a plain and permanent manner with the manufacturer's name or identifying symbol, part number, and country of origin.

Finish. All exposed metal parts, except those of corrosion-resistant material, shall be plated with zinc or nickel, or provided with a baked enamel coating, or oxidized finish suitable for resisting corrosion. All corners and edges shall be rounded or chamfered to prevent injury to the user.

Component parts. The major components are the chalk line, reel assembly, and chalk powder. The component parts of the reel assembly are the case, reel, locking device and handle. The chalk line and reel shall be similar to figure 1.

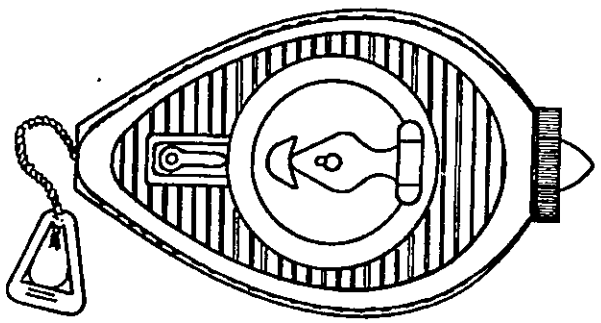


FIGURE 1. Chalk line and reel, self-chalking.

Case. The case shall be of a corrosion-resistant metal, or provided with a corrosion-resisting finish as specified. It shall be not less than 0.025 inch thick, shall hold not less than 1 ounce of chalk powder that will continually impregnate the line with powder, and shall be capable of being refilled whenever necessary. It shall be constructed to prevent the loss of any chalk powder under normal working conditions and shall conform to the drop test.

Reel. The reel shall be made either of a corrosion-resistant metal, plastic, or corrosion-resistant metal and plastic, shall be substantially constructed, rotate freely, and shall be capable of holding the full length of line.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:23Z
Check the source to verify that this is the current version before use.

Handle. The handle shall be made of corrosion-resistant metal or provided with a corrosion-resisting finish as specified above. The handle shall be suitable for winding the line on the reel, and shall have a crank length of not less than 1 inch.

Line. The line shall be number 12, three-strand, medium seine twine conforming to T-T-881, or nylon line. Line shall be 50 feet in length. Additional lines for replacement shall be furnished when specified.

Hook-ring. The hook-ring shall be made of a corrosion-resistant metal or nickel plated steel, and shall provide a positive means for holding one end of the line to the object to be marked, permitting one-man operation of the chalk line.

Locking device. When in the "Off" position, the locking device shall allow a free running line; when in the "On" position, the locking device shall prevent the line from being pulled from the reel.

Chalk powder. Unless otherwise specified, the chalk powder shall be white in color. Chalk powder shall be finely powdered, nonhardening and noncaking. Additional chalk powder for replacement shall be furnished in 1-, 4-, 8-, or 12-ounce containers when specified.

Inspection.

Examination. Sample reels shall be selected at random in accordance with MIL-STD-105 at inspection level II and acceptable quality level (AQL) shall be 1.5 percent. Reels shall be examined to verify conformance to all the requirements of this CID. Any sample containing one or more defects shall cause rejection of the defective reel, and if the number of defective reels in any sample exceeds the acceptance number for that sample shall cause rejection of the lot represented by the sample.

Drop test. Sample reels shall be selected from each lot in accordance with inspection level L-4. Each sample reel with chalk line shall be dropped by hand at least 10 times in various positions from a height of 5 feet onto a solid foundation, such as concrete, or a solid flat steel plate, after which it shall show no breaks or cracks and shall perform in a normal manner. If any reel is damaged by the test, this shall cause rejection of the entire lot.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Federal Specifications, Standards and Commercial Item Descriptions (CIDs) are available from General Services Administration, Specifications Unit (WFSIS), 7th and D Street SW, Washington, DC 20407.

Military Specifications and Standards are available from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

NOTE:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements.

MILITARY INTERESTS:

NONE: DoD has waived coordination on this commercial item description until further notice.

PREPARING ACTIVITY:

GSA/FSS

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:23Z
Check the source to verify that this is the current version before use.