A-A-2531
February 19, 1987

COMMERCIAL ITEM DESCRIPTION

MARLINESPIKE (MANILA ROPE)

The General Services Administration, has authorized the use of this commercial item description in preference to GGG-M-00100.

This description covers marlinespike with eye for use in opening and separating strands of manila rope for splicing.


Salient characteristics.

Material used in the construction of the marlinespike shall be made from a minimum of 10/40 carbon steel. The marlinespikes shall be hardened to approximately two thirds of the length from the point and shall all show a Rockwell hardness of not less than 45 nor more than 55 on the C scale. Hardness shall be tested in accordance with ASTM E 18.

The issue of the ASTM test method in effect on the date of solicitation shall be used to determine compliance with these requirements.

The pointed end of the spike shall be oval wedge shaped to assist in loosening and opening rope strands. The head shall be beveled to provide a comfortable grip in the palm of the hand. The eye shall be smooth and edges rounded to prevent cutting or chafing the lanyard used for hanging the spike.

Dimensions. The marlinespike shall conform to the dimensions specified in the figure below:

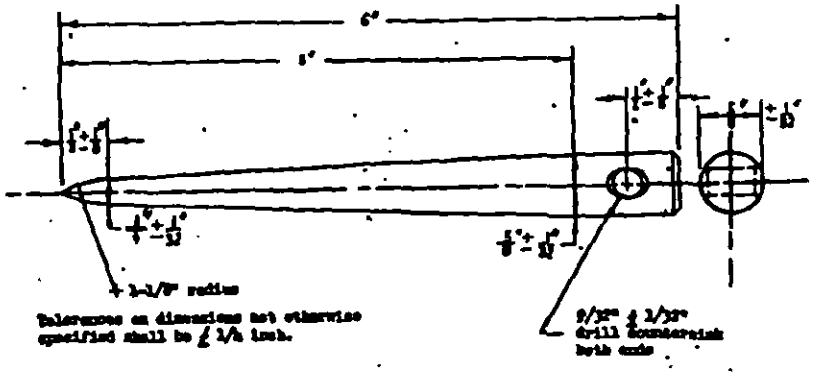


Finish on the marlinespike shall be smoothly polished and free from burrs.

Each marlinespike shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacturer may be readily identifiable.

Workmanship. The marlinespike shall be free from any defects that would affect appearance or serviceability or durability.

Examination of the end item for defects in dimensions and workmanship. The sample unit for this examination shall be one marlinespike. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 expressed in terms of percent defective in accordance with MIL-STD-105.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

Inspection for testing hardness. The sample unit for this inspection shall be one marlinespike. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective in accordance with MIL-STD-105.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Note. The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements.

ASTM test method is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

PREPARING ACTIVITY

GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.