MILITARY SPECIFICATION

ARRESTING HOOK INSTALLATION, RUNWAY ARRESTING SYSTEM, AIRCRAFT, EMERGENCY

1. SCOPE

1.1 This specification covers the basic requirements for the design and installation of an aircraft emergency arresting hook intended for use with runway arresting systems. Design requirements for fully operational hooks and installations are contained in specification MIL-D-18717.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-D-1000	Drawings, Engineering and Associated Lists
MIL-A-8860	Airplane Strength and Rigidity; General Specification for
MIL-D-18717	Design; Aircraft Arresting Hook Installations
MIL-H-21594	Hook Point; Aircraft Arresting, Forged Corrosion-Resistant Steel

STANDARDS

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-203	Cockpit Controls, Location and Actuation of, for Fixed Wing Aircraft.

PUBLICATIONS

Air Force - Navy Aeronautical Bulletin

No. 143	Specifications and Standards; Use of
AFSCM 80-1	Handbook of Instructions for Aircraft Design

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, publications and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provision for preproduction testing.

3.2 Materials. Materials shall be as specified herein. When materials are used which are not covered by specifications, they shall be completely defined in detail specifications, or drawings furnished by the contractor.

3.2.1 Protective treatment. When materials are used for components of the installation that are subject to deterioration when exposed to environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification.

3.2.2 Selection of specifications and standards. Specifications and standards describing necessary systems, commodities, materials and processes not specified herein, shall be selected in accordance with ANA Bulletin No. 143. Parts, materials, or processes which are not covered by these documents shall be completely described on the manufacturer's drawings or detail specifications.

3.3 Design

3.3.1 Function

a. The arresting hook installation shall be designed and constructed to successfully engage a runway arresting system pendant and decelerate the aircraft to a stop.

b. The particular runway arresting system and its characteristics, for which the aircraft arresting hook installation is to be designed, shall be prescribed by the procuring activity. In the event that such a designation is not made, it shall be assumed that the installation is designed for use with a BAK-13 system.

3.3.2 Retraction

a. There is no requirement for retraction of the hook in flight since the installation is intended for emergency use only.

b. The hook shall be capable of being retracted manually on the ground without the use of special tools.

c. The hook must be capable of being extended either prior to or after landing touchdown, however, the system need not be designed for fly-in engagements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

3.3.3 Loads

a. The arresting hook system shall be designed to withstand the loads resulting from engagement during aborted takeoff and emergency landings. A minimum of Vspa engagement velocities and maximum takeoff aircraft weights shall be as defined in MIL-A-8860 and in the detail aircraft performance specification.

b. It is assumed that the arresting system is engaged after landing impact has been completed and the aircraft is in a stabilized roll with all wheels on the runway.

c. Approximate maximum runout loads can be obtained from Fig. 1.

d. Side loads shall equal the maximum load obtained in Fig. 1, applied at angle of ±20° from the aircraft centerline in a horizontal plane.

3.3.4 Geometry (ref. fig. 2). The arresting hook geometry shall be such that the following parameters are satisfied:

a. The hook attach point shall be located such that aft arresting force does not cause directional instability during the arrestment.

b. The hook shall be located so that the aft arresting force causes the minimum amount of increase in nose gear vertical reaction.

c. The aft arresting force shall not cause the nose wheel to be lifted from the runway during any portion of the arrestment.

d. The hook length and down stop shall allow positive contact of the hook point on the runway at a maximum nose down condition (Line N Fig. 2).

e. The hook point shall be so located when up and locked that the point clears the runway by minimum of fourteen (14) inches at the maximum tail down landing attitude with the aft struts and tires compressed to the design sinking speed deflection as shown in Fig. 2, Line (T). If this is incompatible with the aircraft basic design, suitable guards shall be installed which will prevent inadvertent hook-up under these conditions.

f. For other than laterally rigid ("V" type) hooks, the hook shall be free to swing laterally not less than 20 degrees each side of center to allow alignment during an off center or yawed engagement. A spring or other suitable device shall be provided to maintain aft trail prior to cable engagement.

g. The in-flight maximum down angular position of the hook shall be 80° or less when measured relative to the airplane landing approach line (A) or to the airplane max. tail down line (T) (See Fig. 2), whichever is critical.

h. The arresting hook shall be designed to insure engagement after the cable has been displaced by the nose gear and/or main gear and/or tail bumper where applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T07:37Z
Check the source to verify that this is the current version before use.

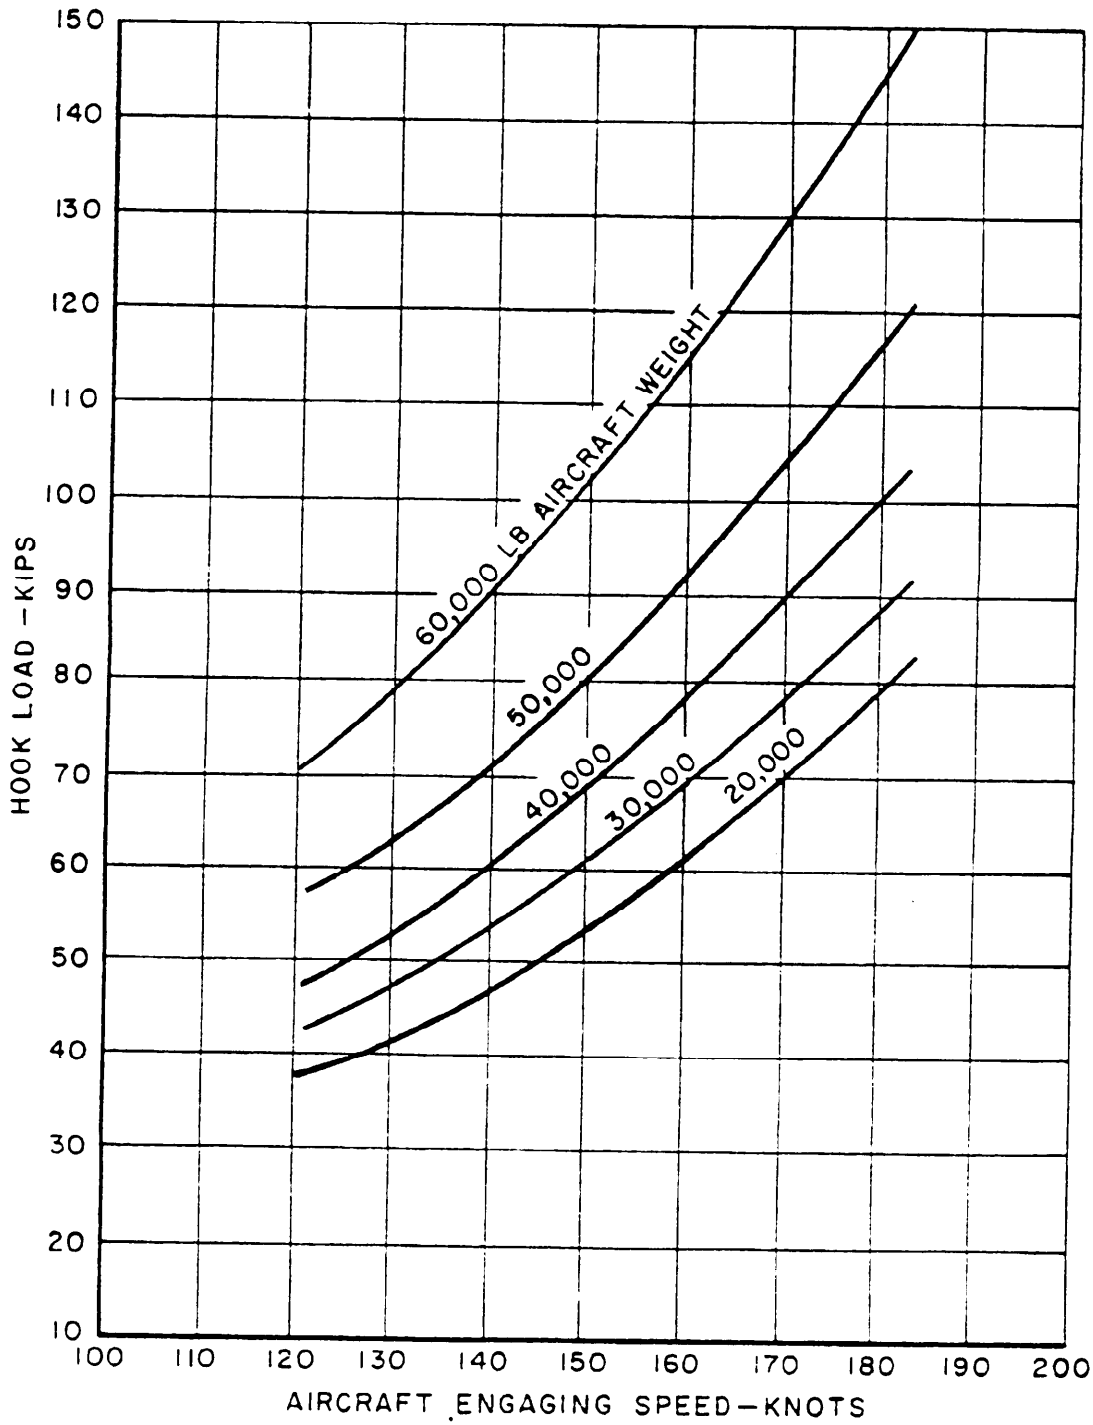


FIGURE 1. BAK-13 System - Hook Load Vs Engaging Speed

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

Definition of ground lines

Static ground line S	The ground line with the aircraft at rest, in the basic mission take-off configuration.
Design landing ground line L	The ground line at the aircraft landing attitude for the design landing configuration (as defined in the detail aircraft specification) with the shock struts & tires deflected to the corresponding landing loads.
Landing approach line A	A theoretical line determined by increasing the angle of line L by vectorially adding the design sinking speed, V_s to the design landing speed, V_f.
Maximum tail down ground line T	The maximum tail down attitude possible, limited by either aircraft structure or the tail bumper (if installed) compressed to maximum working stroke. The shock struts fully compressed and tires deflected corresponding to design landing loads.
Maximum nose down ground line N	The maximum nose down ground line caused by either of the following: 1) Brake drag of .31 times the main gear reaction for the weight and C.G. location causing the most nose down attitude. 2) A flat nose strut and a flat nose tire for the weight and C.G. location causing the most nose down attitude.

NOTE: In determining N , consider the condition where the shock struts and tires are deflected for aircraft weight after having been serviced at aircraft maximum gross weight.

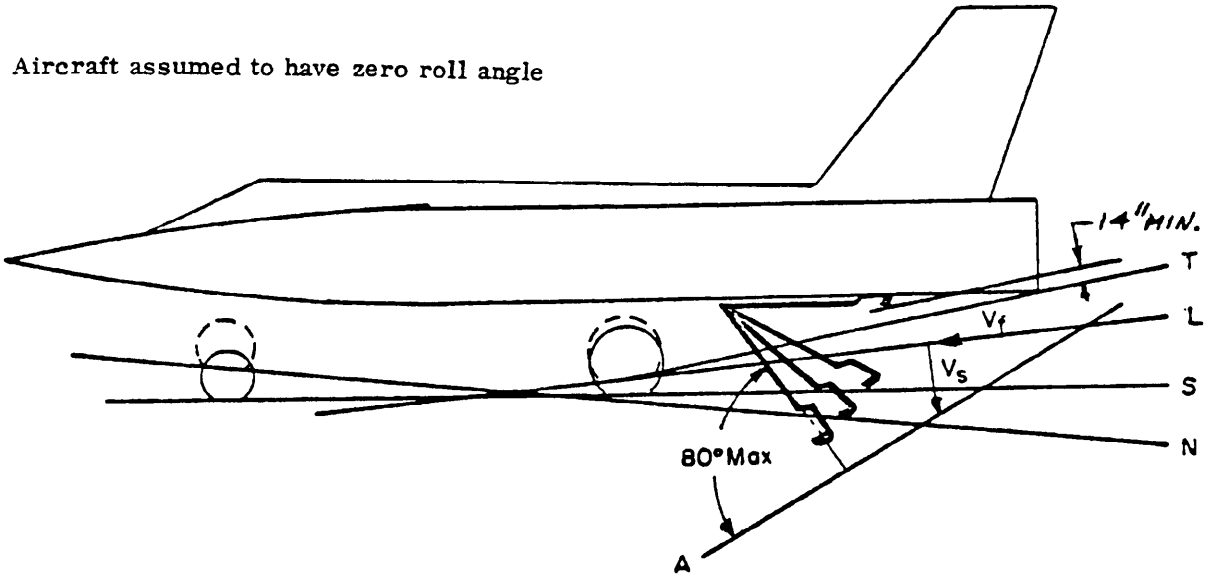


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

3.3.5 Components. Design of the various components of the installation shall comply with the following requirements:

a. The hook point contour shall be designed in accordance with MIL-H-21594 and dimensioned as in Fig. 3 unless otherwise specified by the procuring activity.

b. The hook point shall be easily removable from the shank to allow for replacement in the field.

c. A force shall be provided to lower and maintain the hook extended against air loads equivalent to the gear down placard speed. This force may or may not be from the same source as the "hold down" moment.

d. The hook shall be fully extended and stabilized ready for arrestment within 2 seconds after the cockpit release control has been actuated.

e. A "hold down" moment about the hook attach point shall be provided to load the hook point against the runway. The following minimum values of hold down moment at various hook positions shall be provided; and shall not be less than 100 pounds:

Hook on runway, A.C in 3 point attitude	$M = I/15$
Hook full up	$M = I/15$

Where I = weight moment of inertia of hook about the pivot point in pound-inches squared.

If air is used to provide the hold down and extension moment, a pressure gauge which can be readily observed during normal pre-flight shall be incorporated. Any air system shall be designed to provide proper load when subjected to the required extreme changes in temperature between servicing and actual use.

f. An energy absorbing device to prevent hook bounce in excess of 2 1/4 inches on a smooth surface shall be provided. The device shall absorb the energy generated by the hook point contacting normal runway discontinuities, such as expansion joints and concrete slab mismatch, so that hook bounce is held to a minimum. The energy absorber shall incorporate a load relief device which will allow the necessary rapid movement of the hook during cable pick-up without overloading the hook assembly or back-up structure. The energy absorber may be eliminated if analytical and operational test data can be presented indicating that the hook can be made stable by other means. This data must be approved by the procuring activity prior to release for manufacture of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

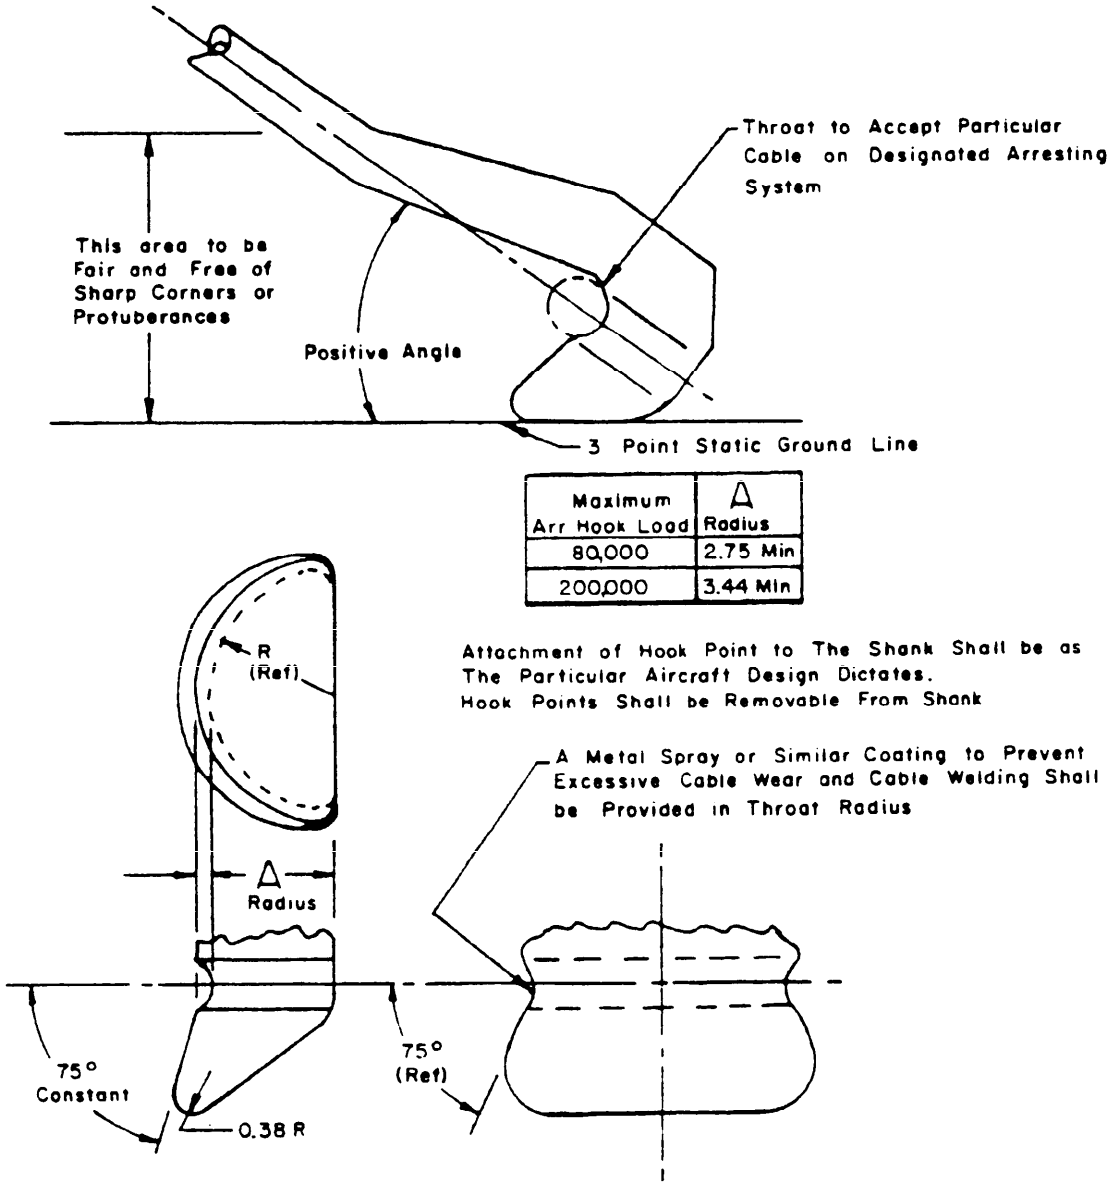


FIGURE 3. Hook Point Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

g. An uplock mechanism shall be provided to retain the arresting hook in the up position during all required aircraft flight and landing conditions and which releases the hook upon command of the pilot. The cockpit controls shall be located in accordance with the requirements of AFSCM 80-1 and MIL-STD-203. A manually operated mechanical system independent of the proper function of any other aircraft system is desired. A powered system is acceptable provided the source of operating force is not adversely affected by the failure of any single airplane power source. The uplock shall be readily released and re-set from the ground without special tools.

h. A suitable removable ground safety lock with appropriate flag shall be provided to prevent accidental actuation of the uplock.

i. An indicator shall be provided in the cockpit which indicates after release when the arresting hook is in the proper position for barrier engagement.

j. If necessary, an up-stop bumper or energy absorber shall be provided to prevent damage to the aircraft during overshoot of the hook from initial cable pick-up loads or from cable wave loads during runout. The device shall prevent the hook from causing any damage to the aircraft structure or internal equipment under the most adverse required barrier engagement. It is required that, in the location of internal and external aircraft equipment aft of the hook point, the possibility of damage from cable contact be considered.

k. A down-stop which limits the maximum down position of the hook as described in paragraph 3.3.4g) is required. The down-stop shall function properly after hook release with or without airload present.

3.4 Drawings

3.4.1 Preliminary drawings showing the following shall be submitted to the procuring activity for approval in accordance with the aircraft data submittal requirements document:

a. A profile, plan and front view drawing of the aircraft with an envelope of extreme center of gravity locations shown. The hook shall be shown at full down, full up, and at pertinent intermediate positions. The various ground lines as required in paragraph 3.3.4 and Fig. 1 shall be shown.

b. A preliminary installation drawing showing the hook point, shank, uplock assembly, snubber, attach fittings and other significant pieces of hardware. Intended materials, heat treatments, and finish processes shall be indicated for major structural components.

c. A schematic of the uplock release and indication system.

3.4.2 Engineering drawings shall be in accordance with MIL-D-1000 and submitted per the requirements of the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

3.5 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements of Specification MIL-STD-100 shall govern changes in the manufacturer's part number.

3.6 Performance. The arresting installation shall be capable of satisfactorily completing the ground, flight, and inspection tests specified in Section 4.

3.7 Marking. Assemblies and components shall be identified in accordance with MIL-STD-130.

3.8 Workmanship. The components shall be uniform in quality and free from irregularities or defects which could adversely affect performance, reliability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility. Unless otherwise specified in the procurement document, the contractor is responsible for the inspection requirements as specified herein under the surveillance of the government inspector. Records of tests performed shall be kept complete and available to the government inspector.

4.2 Classification of tests. Tests shall be classified as:

a. Preproduction - Preproduction tests are those tests required on initial installations to prove the suitability and integrity of the basic design of the installation.

b. Quality Assurance - Tests are those tests required on each component or assembly to prove and maintain the quality of the installation and its components on a production basis.

4.3 Preproduction tests

4.3.1 Structural static tests. The contractor shall conduct structural static tests on the arresting hook installation as prescribed in MIL-A-8860, except the repeated load tests. Repeated load test requirements, if any, will be specified by the procuring activity.

4.3.2 Development tests - runway. The contractor shall conduct a series of runway taxi tests to determine that the hook system is stable and the hook point will not bounce over the cable during the actual arresting tests. These tests may be conducted at Air Force facilities made available upon request. An actual test aircraft may be used or a substitute moving vehicle capable of simulating the required runway speeds may be used. Data shall be recorded to determine height of hook bounce and magnitude of bounce loads incurred at various velocities.

4.3.3 Operational tests. A series of actual barrier engagements shall be conducted to prove the adequacy of the complete design to meet the intended performance requirements. These tests may be conducted by the manufacturer at an Air Force

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

facility or may be conducted by the Air Force with support provided by the manufacturer, whichever type of program is specified in the procurement document. The test program shall determine the following minimum basic parameters:

4.3.3.1 Maximum hook load and barrier load as a function of aircraft weight and contact velocity for on-center engagements and for off-center engagements up to 20 percent of the barrier span.

4.3.3.2 Maximum allowable engagement velocity for on-center and off-center engagements as a function of aircraft weight.

4.3.3.3 Proper function of the complete installation and detail components during above tests.

4.3.3.4 Type of aircraft damage incurred from cable contact and hook overshoot for various types of engagements. Determine the inspection procedures necessary for service aircraft after various types of engagements.

4.4 Quality assurance tests

4.4.1 Examination of product. The arresting hook installation and each component shall be thoroughly examined to determine conformance with this specification and all applicable drawings.

5. PREPARATION FOR DELIVERY

5.1 Not applicable

6. NOTES

6.1 Intended use. The requirements specified herein are intended for use in the design and installation of an aircraft emergency arresting hook for use with runway arresting systems for land based aircraft.

Custodian:
Air Force - 11

Review activities:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 1710-F002

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:37Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

AFLC-WPAFB-OCT 67 2M

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:37Z
Check the source to verify that this is the current version before use.

ASD(ASNPS)
WRIGHT-PATTERSON AFB, O 45433

POSTAGE AND FEES PAID

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

ASD(ASNPS)
Wright-Patterson AFB, O 45433

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-511/A-1084

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:37Z
Check the source to verify that this is the current version before use.