INCH-POUND

MIL-C-82141A(MC)
20 February 1990
SUPERSEDING
MIL-C-82141(MC)
4 January 1967

MILITARY SPECIFICATION

COVER, MUSIC CARRYING POUCH: EMBROIDERED

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for one type and size scarlet wool broadcloth music carrying pouch cover, embroidered with the United States Marine Corps emblem.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specification and Standards (DoDISS) and supplement thereto, cite in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	-	Thread, Cotton
UU-P-268	-	Paper, Kraft, Wrapping

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development and Acquisition Command, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7720

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-G-16491	-	Grommet, Metallic
MIL-B-17757	-	Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29405	-	Cloth, Broadcloth, Wool and Wool/Nylon

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Navy Publications and Forms Center (Attn: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Laws and Regulations

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of the Documents, U. S. Government Printing Office, Washington, DC 20402).

2.2 Non-Government publications. The following documents(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

DEPARTMENT OF DEFENSE STANDARD SHADES FOR HERALDRIC YARNS

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREADS

(Application for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Ave., New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection and approval (see 4.4 and 6.3).

3.3 Materials

3.3.1 Basic material. The basic material shall be cloth, broadcloth, wool, scarlet, shade 2501, 14-15.5 ounce, conforming to type I of MIL-C-29405 except the finished cloth shall show fair fastness to crocking, perspiration, wet (dry) cleaning and light.

3.3.2 Buckram. The buckram for embroidery backing shall be of good commercial quality, as used in the industry.

3.3.3 Rayon thread. The embroidery thread shall be continuous filament, regenerated cellulose (viscose or cuprammonium) type of rayon, 600 ± 30 denier, single ply, and minimum breaking strength of 2.3 pounds.

3.3.3.1 Color and colorfastness. Embroidery thread shall match the approved standard shades (see 6.4), conforming to the following cable numbers for rayon thread (see DoD Standard Shades for Heraldric yarns):

White	Cable No. 67101
Scarlet, HL	Cable No. 67111
Silver Gray, HAM	Cable No. 67137
Light Blue, HU	Cable No. 67120
Old Gold, HE	Cable No. 67105

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

The dyed threads shall show good fastness to wet (dry) cleaning and light when tested as specified in Table II.

3.3.4 Cotton thread.

3.3.4.1 Bobbin thread. Bobbin thread used in the embroidery shall be a good commercial grade of two-ply cotton yarn.

3.3.4.2 Sewing thread. The thread for seaming and stitching shall be cotton, soft finish, ticket No. 40, 3-ply, conforming to type IA3 of V-T-276. The color of the thread shall be scarlet cable No. 66040, except when dyed thread shall show fair fastness to wet (dry) cleaning and light when tested as specified in V-T-276. The thread for basting shall be a good commercial grade.

3.3.5 Eyelet. Eyelet shall be brass, bright finish, conforming to type III, class 1, size 0 of MIL-G-16491.

3.4 Design. The cover shall be the Marine Corps design, as shown on Figures 1 and 2.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide for a 1/4 inch seam allowance.

3.5.1 List of pattern parts. Covers shall be cut from the specified material in accordance with the pattern parts indicated:

Material: Cloth, Broadcloth, Wool

Item	Pattern Nomenclature	No. of Cut Parts
1.	Front part	1
2.	Lower backpart	1
3.	Upper backpart	1

3.6 Construction. The construction shall conform in all respects to Figure 2 and as specified herein. The cover, consisting of three pieces of basic material, shall have a one piece front embroidered with the Marine Corps emblem, a two piece back with a horizontal, straight type buttonhole in the lower backpart, and a brass eyelet near the top end of the cover. All raw edges, including edges of seams, shall be overedge stitched.

3.6.1 Manufacturing requirements. The cover shall be manufactured in strict accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

3.6.1.3 Tacking and backstitching. Ends of seams or stitching, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch; thread breaks shall be secured by stitching back of break not less than 1/2 inch. All thread ends shall be trimmed and loose ends shall be removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting.					
	a. Cut covers in strict accordance with patterns furnished by the Government.					
	b. Cut fabric in direction indicated by directional lines on pattern.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting the component part containing damages such as holes or serious weakening defects, such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace component part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, mends or burns.					
3.	Make front part of cover.					
	a. The Marine Corps emblem shall be embroidered in accordance with the standard sample. The stitch types, texture, density of the embroidered emblem shall conform in all respects to the standard sample. Embroidery work shall not be stiff, but shall be soft and flexible in finish. The thread colors of the emblem shall be as specified in 3.3.3.1. The buckram specified in 3.3.2 shall be used as backing for reinforcing the stitches of the embroidered emblem.					
4.	Overedge stitch ends.					
	a. Overedge stitch the bottom edge of the upper backpart and the top edge of the lower backpart as shown in Figure 2.	504	EFd-1	12-16	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make buttonhole.					
	a. The buttonhole shall be of a horizontal straight type, 1 1/2 to 1 5/8 inches long with a minimum of 96 stitches per buttonhole and securely tacked at both ends. The buttonhole shall be made at the center of the lower backpart 1 1/2 + 1/4 inches above the raw bottom edge, in accordance with mark on the pattern.	Button-hole		96 per button-hole includ-ing tack	40/3	40/3
6.	Assemble cover and stitch parts.					
	a. Position the lower backpart face to face with the front part, and with the sides and bottom edges even.					
	b. Position the upper backpart face to face with the front part and with the side and upper edges even, and the lower edge of the upper backpart overlapping the upper edge of the lower backpart.					
	c. Overedge stitch the three plies together at side, bottom and upper edges as shown in Figure 2.	301 or 401 and 506 (com-bined)	SSa-2	18-22	40/3	40/3
7.	Turn cover.					
	a. Turn cover right side out, with the face of fabrics and emblem on the outside of cover, and complete-ly working out all the corners.					
	b. Baste cover along seamed edges.	101 or Hand				
	c. Press the cover smooth and flat with a heated pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
8.	Attach eyelet. a. The eyelet shall be securely clinched to the cover through front and upper backpart without cutting or otherwise damaging the fabric, at location shown by the mark on the pattern. The flange of the eyelet shall be on the front of the finished cover.					
9.	Clean cover. a. Pull any basting thread, trim and remove any loose ends of thread and remove any spots or stains.					
10.	Press cover. a. Press the cover smooth and flat with a heated pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished cover shall conform to the shown in Figure 2.

3.8 Workmanship. The finished cover shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 3.2 and 6.3), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The present of any defect may be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Component and material testing. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. The method of testing shall be as specified in FED-STD-191, wherever applicable. Testing shall be performed on components listed in Table II for characteristics noted. All test reports shall contain the individual values used in

Source: https://assist.dla.mil Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following.

Component	Lot size expressed as	Sample unit for testing
Rayon thread	Bobbins	Sufficient number of bobbins to total a minimum of 360 yards

The sample size shall be as shown below. The lot shall be unacceptable if one or more units of product fail to meet any specified requirements.

Lot Size	Sample Size
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE II - Test methods

Components	Characteristics	Rqmt. para.	Test method	No. Det. per S/U	Results reported as
Rayon thread (Embroidery)	Material identification	3.3.3	Std. Comm'l	1	Pass or fail
	Ply	3.3.3	Visual	1	To nearest number
	Denier	3.3.3	4021	1	To nearest denier
	Breaking strength (lbs)	3.3.3	4100	20	Avg. of 20 det. to nearest 0.1 lbs.
	Color	3.3.3.1	Visual	1	Pass or fail
	Colorfastness to: wet (dry) cleaning	3.3.3.1	5620	1	Good, fair or poor
	Light	3.3.3.1	5660	1	Good, fair or poor

4.5.2 Inspection of the end item. The classification of defects found during examination shall be in accordance with the list shown in 4.5.2.1 and 4.5.2.2. The lot size and sample unit shall be expressed in units of one finished cover. Inspection level shall be II (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

4.5.2.1 Classification of defects. All defects shall be classified as indicated below.

Examine	Defect	Classification Major	Classification Minor
Basic fabric	Any hole, cut, tear, smash or weak place.	101	
	Streak or shade bar.	102	
	Any mends or burns.	103	
Open seams	On stitch type 301:		
	-One inch or less.		201
	-More than one inch.	104	
	On stitch type 401:		
	-any open seam.	105	

Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or runoffs occur. On double stitches seams, a seam shall be considered open when either one or both sides of the seam are open.

Run-off.	(See classification of open seam).		
Seam and stitch type	Wrong seam or stitch type.	106	
Gage of stitching stitching margin	Irregular, i.e., unevenly gaged or corresponding stitches not uniformly gaged.		202
Stitch tension	Loose tension resulting in a loosely secured seam.		203
	Tight tension (stitches break) when normal strain is applied to seam or stitching).		204

Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.

Stitches per inch	One or two stitches less than minimum specified.		205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Three or more stitches less than minimum specified	107	
	Stitches in excess of maximum specified.		206
Thread breaks	Not backstitched or overstitched as specified.		207
Eyelet	Not type and size specified.	108	
	Broken or malformed, failing to serve purpose.	109	
	Split, burr, sharp edge or corroded area.	110	
	Not properly clinched, i.e., cutting surrounding fabric; loose, exposing teeth of washer.	111	
Buttonhole	Not horizontal straight type.	112	
	Number of stitches less than specified.		208
	Stitching not securely caught in fabric causing stitching to pull away.	113	
	Not securely tacked at each end.	114	
	Broken stitch.		209
	Length not within specified range.	115	
Embroidery	Not in conformance with standard sample with respect to design, color arrangement, stitch type or density.	116	
	Embroidery work stiff.		210
	Thread colors not as specified.	117	
	Shift affecting appearance.	118	
	Loose or tight tension affecting appearance.	119	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Bunched or tangled yarns	120	
	Stitching incomplete.	121	
	Broken or skipped stitches affecting appearance.	122	
	Bobbin thread showing on face of embroidery affecting appearance.	123	
	Embroidery misshaped or distorted.	124	
	Buckram omitted or entire design not reinforced by buckram.	125	
Assembly	Edges of cover not properly forced out resulting in uneven or irregular edges.		211
	Impression of basting stitches remaining in finished item.		212
Cleanness	Spots or stains not removed.		213
	Thread ends not trimmed throughout.		214

4.5.2.2 Examination for dimensions. Any measurement not conforming to the specified dimension and tolerance shall be considered a defect. The inspection level shall be S-3 (see 6.5).

4.5.3 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of case liner, container flaps; loose strapping, and inadequate stapling. Bulging or distortion of containers.
Weight and content (exterior and interior)	Number per container is more or less than required; net weight exceeds requirement.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cover shall be placed in an individual polyethylene bag fabricated from polyethylene film 0.0015 inch thick. The size of the bag shall be approximately 18 by 10 inches with a 1 inch lip along the open end of the 10-inch dimension. All seams and closures shall be effected by heat sealing except where the 1 inch lip is tucked in for closure. Prior to or during the final heat sealing operation, excess air shall be expelled in order to insure that the maximum number of covers be packed in the shipping container. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. Covers shall be packaged in accordance with the industry's normal practice.

5.2 Packing. Packing shall be level B or commercial as specified (see 6.2).

5.2.1 Level B. Thirty (30) covers, packaged as specified in 5.1, shall be packed in a shipping container conforming to type CF, class domestic, variety SW, grade 200, size 1A of MIL-B-17757.

5.2.2 Commercial. The covers packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be placed in each polyethylene bag in order to permit ready identification.

Nomenclature
Stock number
Contract number
Name of contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. The cover described herein is intended for use by Marine Corps Band and the Drum and Bugle Corps.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of specification.
(b) Whether first article is required (see 3.2).
(c) Number of covers in the first article.
(d) Selection of applicable levels of packaging and packing (5.1 and 5.2).
(e) Acceptance criteria required (see 6.5).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first articles, preproduction samples, first production of sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Standard samples and shade samples. For information regarding the availability of standard samples and standard shades specified, address inquiry to acquiring activity issuing the invitation for bids.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless other specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 6.5 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.


6.5.3 For packing examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Subject term (keyword) listing.

Ornamental, Scarlet, Wool

6.7 Figures. Figures 1 and 2 show the design, dimensions, and details of the music pouch cover. In the event of conflict between the figures and the text of this specification, the text shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

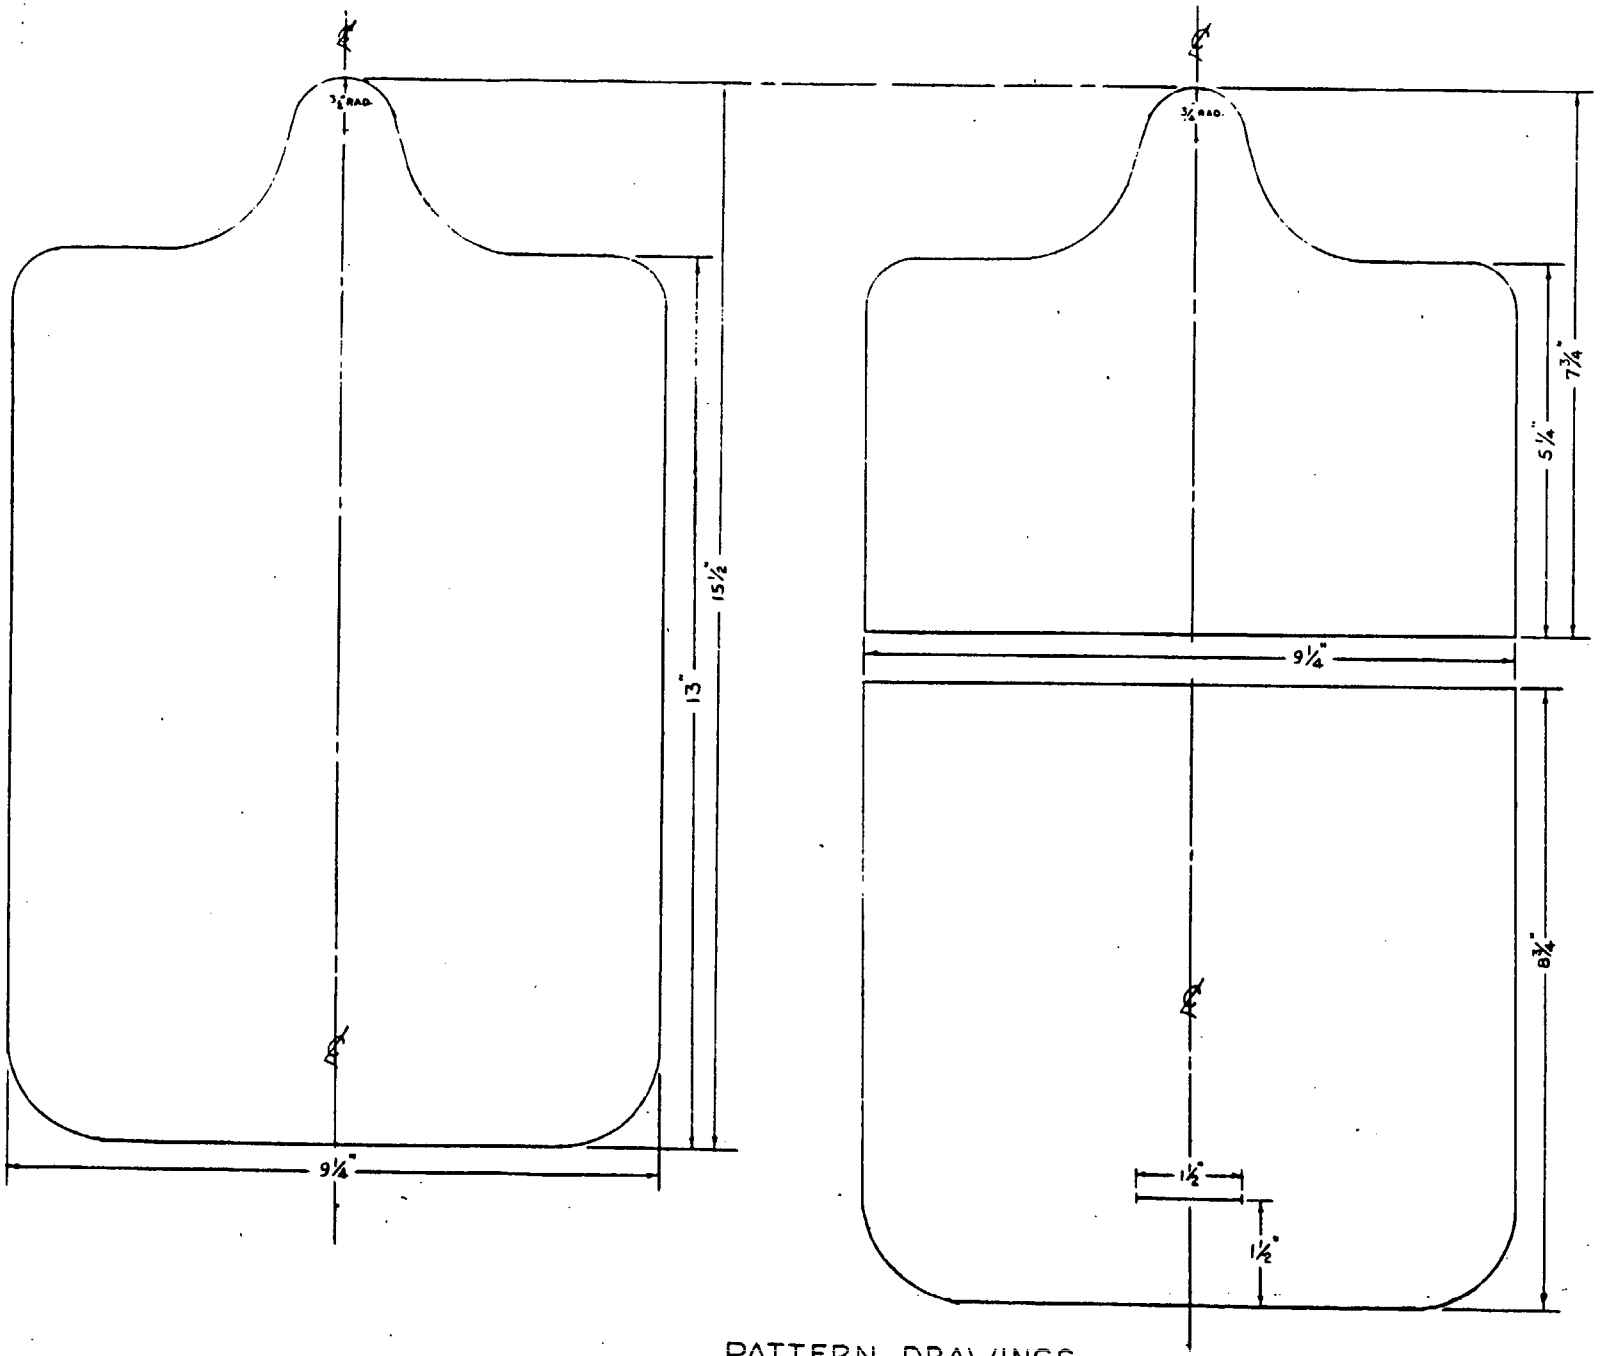

PATTERN DRAWINGS

FIGURE 1. MUSIC POUCH COVER, U.S.M.C. BAND EMBROIDERED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 16:44:04
Check the source to verify that this is the current version before use.

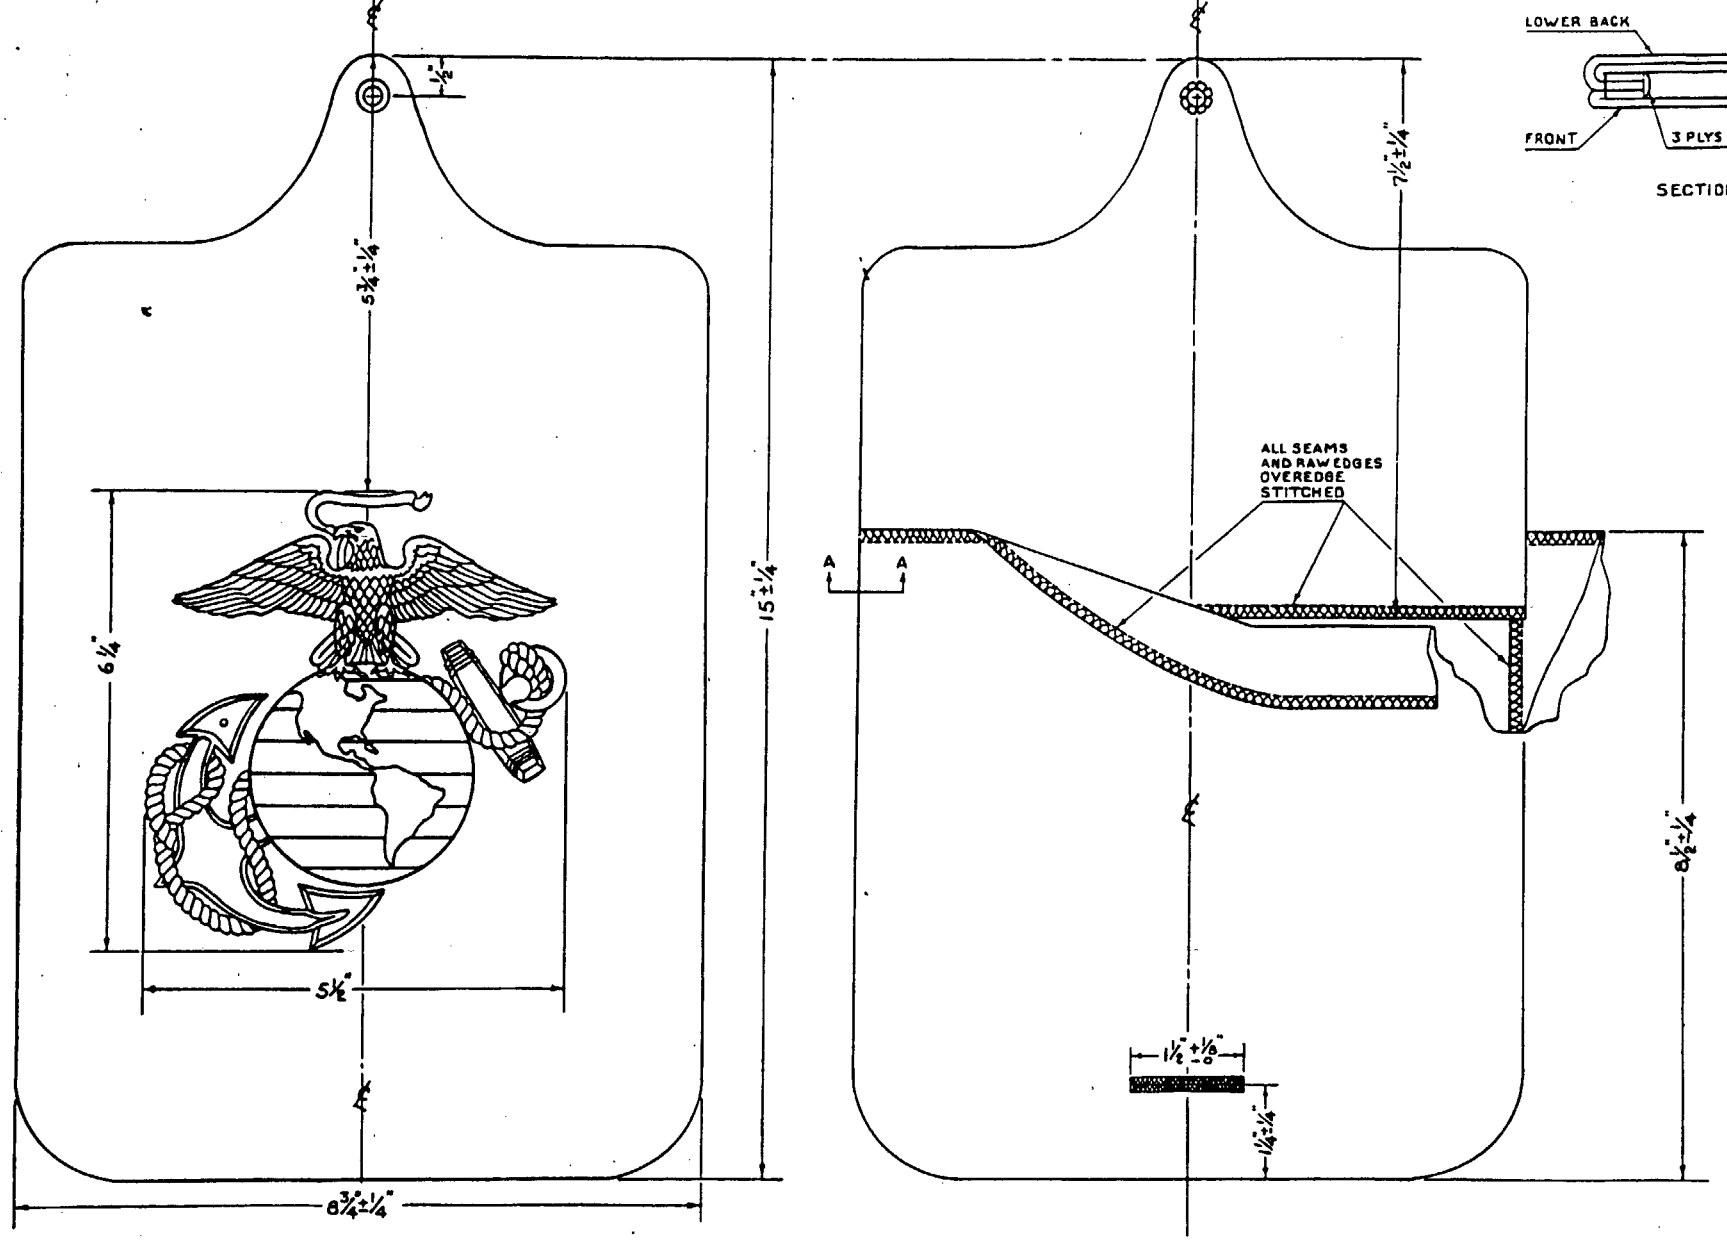


FIGURE 2. MUSIC POUCH COVER, U.S.M.C. BAND
EMBROIDERED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-82141A(MC)	COVER, MUSIC CARRYING POUCH: EMBROIDERED

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:45Z
Check the source to verify that this is the current version before use.