INCH-POUND

MIL-C-82899(OS)
4 January 1994

MILITARY SPECIFICATION

CARTRIDGE, FIRE EXTINGUISHER, CCU-122/A

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the manufacture and acceptance of the CCU-122/A Fire Extinguisher Cartridge, referred to herein as "cartridge".

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-T-60	Tape: Packaging, Waterproof

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Branch (Code 8420), 101 Strauss Avenue, Indian Head, MD 20640-5035 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by sending a letter.

AMSC N/A FSC 1377
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-8660	Silicone Compound NATO Code Number S-736
MIL-C-10464	Cans, Hermetic Sealing, Metal, Light Gage, Tear-Strip Type
MIL-B-81705	Barrier Materials, Flexible, Electrostatic Protective, Heat Sealable

STANDARDS

MILITARY

MIL-STD-129-1	Marking for Shipment and Storage - Ammunition and Explosives
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1168	Ammunition Lot Numbering

(Unless otherwise indicated, copies of Federal and military specifications and standards are available from: Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation (see 6.2).

DRAWINGS

NAVAL AIR SYSTEMS COMMAND (CAGE Code 30003)

DL 838AS209	Cartridge, Fire Extinguisher, CCU-122/A

PUBLICATIONS

NAVSUPINST 4030.28	Logistics, Packaging Of Material

(Application for copies should be addressed to the Commanding Officer, Naval Aviation Supply Office, Cog I Support Branch (Code 03441), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

CODE OF FEDERAL REGULATIONS (CFR)

49 CFR 100-199 Transportation

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 **Non-Government publications.** The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 545 Standard Method for Determining Image Quality In Direct Thermal Neutron Radiographic Examination

(Application for copies of ASTMs should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 **Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 **First article.** Unless otherwise specified in the contract or purchase order (see 6.2), a first article sample (see 6.3) of 27 cartridges conforming to DL 838AS209 shall be produced using the same procedures and methods proposed for production. The sample shall be tested as specified in 4.2.1 (see table I).

3.2 **Primary components.** The ignition charge and the output charge are primary components. Only one lot of each primary component shall be used in a cartridge lot. One primary lot may be used in more than one cartridge lot.

3.3 **Cartridge production.** The cartridges shall be manufactured in accordance with DL 838AS209 and the documents listed thereon. Each production cartridge shall meet the requirements of 3.3.1 through 3.3.6 as outlined in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

TABLE I. First article test plan.

Test Sequence	Test Paragraph	Requirement Paragraph	Sample Group			
			I	II	III	IV
1. Visual	4.3.1	3.3.1, 3.5 & 5	6	6	6	6
2. Bridge circuit resistance	4.3.2	3.3.2	6	6	6	6
3. Radiographic	4.3.3	3.3.3	6	6	6	6
4. Leakage	4.3.4	3.3.4	6	6	6	6
5. Power current[1]	4.3.7	3.4.1	6			
6. Static Discharge[1]	4.3.8	3.4.2	6			
7. Stray Voltage[1]	4.3.9	3.4.3	6			
8. Vibration[2]	4.3.10	3.4.4		6		
9. Thermal Cycle[2]	4.3.11	3.4.5			6	
10. Ballistic test: -65 ± 5°F +70 ± 5°F +200 ± 5°F	4.3.12	3.4.6	 2 2 2	 2 2 2	 2 2 2	 2 2 2

[1] A bridge circuit resistance test shall be conducted following the specified test.

[2] A visual, bridge circuit resistance test, leakage, and radiographic inspection shall be conducted following the specified test.

3.3.2 Bridge circuit resistance. Each cartridge's bridge circuit resistance shall be 1.00 ± 0.10 ohm when measured in accordance with 4.3.2.

3.3.3 Radiographic examination. When radiographically examined, the cartridge shall show proper assembly, presence of parts, proper crimping, sealing and proper electrical connections, proper thread form, presence of the propellant, non-metal parts, no foreign hydrogenous materials, no voids in the epoxy insulation, and the proper assembly of pyrotechnic/non-metallic materials when inspected in accordance with 4.3.3.

3.3.4 Leakage. The leakage rate of each cartridge shall not exceed 1.0×10^{-5} cc/sec of air when tested in accordance with 4.3.4.

3.3.5 Insulation resistance. The cartridge insulation resistance shall be 2 megohms minimum. The insulation resistance test shall not dud or adversely affect the cartridge, or

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

cause the cartridge to fire, arc-over, flash-over, or breakdown when tested in accordance with 4.3.5.

TABLE II. Production inspections.

Test Sequence	Test Paragraph	Requirement Paragraph
1. Visual	4.3.1	3.3.1, 3.5 & 5
2. Bridge circuit resistance	4.3.2	3.3.2
3. Radiographic	4.3.3	3.3.3
4. Leakage	4.3.4	3.3.4
5. Insulation resistance[1]	4.3.5	3.3.5
6. Dielectric strength[1]	4.3.6	3.3.6

[1] Bridge circuit resistance test required after noted test.

3.3.1 Visual inspection. Cartridges shall be free of the following defects: illegible, missing or inaccurate identification markings, damaged or insufficient surface coatings, burrs, dents, sharp edges, or other defects which may prevent entry of the cartridge into the firing chamber, or affect the resistance of the cartridge to moisture. Each cartridge shall meet the requirements of 3.2, 3.5 and Drawing 828AS209.

3.3.6 Dielectric strength. The test current applied in 4.3.6 shall not dud, adversely affect, or cause the cartridge to fire, arc-over, flash-over, or breakdown. The cartridge leakage current shall not exceed 0.1 milliampere when tested in accordance with 4.3.6.

3.4 Cartridge performance. Cartridges shall be capable of meeting all requirements of 3.4.1 through 3.4.6. Applicable first article tests are defined in table I and applicable lot acceptance tests are defined in table III.

3.4.1 Power current. The cartridge shall not fire when subjected to the power current test in accordance with 4.3.7.

3.4.2 Static discharge. The cartridge shall not fire or dud the when static discharge test is applied in accordance with 4.3.8.

3.4.3 Stray voltage. The cartridge shall not fire or dud when a stray voltage of 100 ma is applied in accordance with 4.3.9.

3.4.4 Vibration. The cartridge shall not incur damage nor deformation when a vibration cycle is applied in accordance with 4.3.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

TABLE III. Lot acceptance inspections and tests.

Inspection/Test	Test Paragraph	Requirement Paragraph	Quantity
1. Visual inspection	4.3.1	3.3.1, 3.5 & 5	Test and retain sample
2. Bridge circuit resistance test	4.3.2	3.3.2	Test and retain sample
3. Radiographic inspection	4.3.3	3.3.3	Test and retain sample
4. Leakage test	4.3.4	3.3.4	Test and retain sample
5. Ballistic test: -65 ± 5°F +70 ± 5°F +200 ± 5°F	4.3.12	3.4.6	 1/3 Sample[1] 1/3 Sample 1/3 Sample

[1] Odd cartridges shall be conditioned at -65°F.

3.4.5 Thermal cycle. The cartridge shall not fire, incur degradation or damage when a thermal cycle is applied in accordance with 4.3.11.

3.4.6 Ballistic. The cartridge shall meet the requirements of 3.4.6.1 and 3.4.6.2 when fired in accordance with 4.3.12.

3.4.6.1 Ignition delay. The maximum ignition delay shall be 10 milliseconds.

3.4.6.2 Indent depth. The minimum indent depth shall be 0.017 inches.

3.5 Workmanship. The cartridge shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be directed to dimensions, finishes, sealing, and assembly operations.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2), the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contractor. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1)

b. Production inspection (see 4.2.2)

c. Lot acceptance inspection (see 4.2.3)

4.2.1 First article inspection. Unless otherwise specified in the contract or purchase order (see 6.2), a first article sample of 27 cartridges shall be subjected to first article testing. Twenty four of these cartridges shall be expended in the tests listed in table I and three cartridges shall be retained for investigative purposes. Any damage inflicted by the environmental treatments, which would adversely affect the performance of the item in service application shall be cause for rejection of the first article sample. Any further production prior to notification by the contracting agency of first article sample acceptability shall be at the contractor's risk. Failure of any cartridge to comply with the requirements of section 3 shall be cause for rejection of the first article represented.

4.2.2 Production inspection. All production cartridges manufactured under the contract shall be inspected and screened for the defects specified in table II. Cartridges failing to meet the requirements that are listed in table II shall be rejected and removed from the lot.

4.2.3 Lot acceptance inspection. Lot acceptance inspection shall consist of the examinations and tests specified in table III. Failure of any sample cartridge to comply with the requirements listed in table III shall be cause for rejection of the lot represented. Packaging defects shall be corrected before acceptance.

4.2.3.1 Sample size. A random sample from each production lot, including the retained sample for investigative purposes, shall be selected in accordance with table IV for lot acceptance inspection. Test sample cartridges and cartridges retained for investigative purposes shall not be applied as part of the quantity specified for delivery by the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

TABLE IV. Lot acceptance sampling.

Lot Size	Test Sample Size	Retained Sample Size
2 thru 50	8	2
51 thru 90	13	6
91 thru 150	20	10
151 thru 280	32	10
281 thru 500	50	10

4.3 Inspections and tests.

4.3.1 Visual inspections.

4.3.1.1 Cartridge inspection. The external condition and appearance of the cartridges shall be determined by comparison to Drawing 838AS209. Specific inspections of the electrical connector, shunt device, threads, stainless steel case, output closure and identification label shall be conducted at a minimum. Each cartridge shall meet the requirements of 3.3.1 and 3.5.

4.3.1.2 Packaging inspection. The condition of the packaging (inner and intermediate containers), packing (outer container), and markings shall be determined by comparison to the requirements of section 5.

4.3.2 Bridge circuit resistance test. The resistance of each cartridge, measured from pin A to pin B, shall be measured with an accuracy of one percent using an apparatus which subjects the bridge circuit to a current of 25 milliamperes maximum. Each cartridge shall meet the requirements of 3.3.2.

4.3.3 Radiographic examination. Radiographic examination shall include x-ray in accordance with MIL-STD-453 and n-ray in accordance with ASTM E 545. The cartridges shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiographic plate shall contain one identified inert cartridge to be used as a comparison aid. All cartridges shall be identified with serial numbers beginning with 001 prior to examination. The cartridges shall be arranged on boards or trays in consecutive order with any missing serial numbers identified on the radiographic plate. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6 inch region maximum. The radiographic identification shall include the NAVAIR drawing number, the complete lot number in accordance with MIL-STD-1168, the contract number, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the tests. Any observable imperfections as outlined in 3.3.3 shall be cause for rejection of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

cartridge. Defective cartridges found during radiographic review are to be marked on the radiographic plate and removed from the production lot.

4.3.4 Leakage test. Leakage shall be measured after bombing in Helium gas for 60 $^{+1.0}_{-0.0}$ minutes at a pressure of 2 $^{+0.1}_{-0.0}$ atmospheres absolute and venting with air for 10 $^{+2}_{-0}$ minutes or washed with dry nitrogen. The cartridges shall then be tested in a dry gas leak tester. Each cartridge shall meet the requirements of 3.3.4.

4.3.5 Insulation resistance test. The insulation resistance between shorted pins, A and B, and the cartridge body shall be measured by applying a potential of 100 ± 5 VDC for a minimum of 60 seconds. Each cartridge shall meet the requirements of 3.3.5.

4.3.6 Dielectric strength test. Dielectric strength shall be evaluated by applying 500 VDC for 60 $^{+15}_{-0}$ seconds in accordance with the requirements of MIL-STD-202, Method 301. Each cartridge shall meet the requirements of 3.3.6.

4.3.7 Power current test. Power current shall be evaluated by conditioning the cartridge at +200 ± 5°F for 4 hours minimum and then applying a direct current of not less than 1 ampere supplying a minimum of 1 watt from pin A to pin B for a period of 5 $^{+0.25}_{-0.00}$ minutes. The test current shall be regulated to within 2 percent. Each cartridge shall meet the requirement of 3.4.1.

4.3.8 Static discharge test. Static discharge shall be evaluated by connecting a 500 ± 5 percent picofarad capacitor, charged to 25,000 ± 500 volts, and a 5,000 ± 5 percent ohm resistor, between the shorted pins A and B and the case of the cartridge in a 5 microhenry total inductance series. The series connection shall be maintained for 60 $^{+15}_{-0}$ seconds. Each series test shall constitute a separate test. Cartridges shall be conditioned at 70 ± 5°F for 4 hours minimum prior to testing. Each cartridge shall meet the requirements of 3.4.2.


4.3.9 Stray voltage. Stray voltage shall be evaluated by applying 100 ± 5 milliamperes in 300 ± 10 millisecond pulses at a rate of two pulses per minute for a total of 2,000 pulses. Cartridges shall be conditioned at 70 ± 5°F for 4 hours minimum prior to testing. Each cartridge shall meet the requirements of 3.4.3.

4.3.10 Vibration test. Vibration shall be evaluated by mounting cartridges on a plate which duplicates aircraft installation. The vibration tests of 4.3.10.1 and 4.3.10.2 shall be conducted at -65 ± 5°F, +70 ± 5°F, and +200 ± 5°F. Each cartridge shall meet the requirements of 3.4.4.

4.3.10.1 Sinusoidal vibration. One sinusoidal sweep shall be conducted in all three axes at all three temperatures utilizing curve AR of figure 514.2-2 of MIL-STD-810C. This sweep will define and record resonant frequencies and associated amplification factors.

4.3.10.2 Random vibration. Perform random vibration for one hour in all three axes at the three temperatures at the level outlined in figure 1. The overall G RMS level shall be 38.97.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

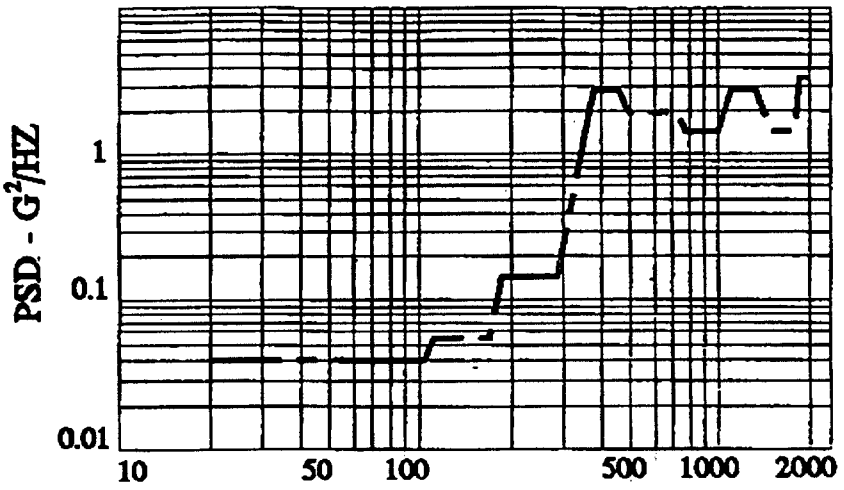

ENDURANCE LEVELS

Freq. (Hz)	PSD (G^2/Hz)	Freq. (Hz)	PSD (G^2/Hz)	Slope (DB/Oct)	G^2
20.0	0.0400	104.0	0.0400	0.0	3.36
104.0	0.0400	113.0	0.0556	11.9	0.43
113.0	0.0556	164.0	0.0556	0.0	2.84
164.0	0.0556	187.0	0.1390	21.0	2.11
187.0	0.1390	275.0	0.1390	0.0	12.23
275.0	0.1390	375.0	2.7800	29.1	94.22
375.0	2.7800	465.0	2.7800	0.0	250.20
465.0	2.7800	490.0	1.9460	-20.5	58.37
490.0	1.9460	720.0	1.9460	0.0	447.58
720.0	1.9460	770.0	1.3900	-15.1	82.47
770.0	1.3900	1000.0	1.3900	0.0	319.70
1000.0	1.3900	1080.0	2.7800	27.1	161.14
1080.0	2.7800	1320.0	2.7800	0.0	667.20
1320.0	2.7800	1415.0	1.3900	-30.0	189.75
1415.0	1.3900	1725.0	1.3900	0.0	430.90
1725.0	1.3900	1886.0	3.2248	28.4	353.19
1886.0	3.2248	2000.0	3.2248	0.0	367.63
Total G^2 equals					3443.30
Overall G RMS equals					58.68

FIGURE 1. Vibration acceptance test level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

4.3.11 Thermal cycle. Thermal cycling shall be conducted by stabilizing cartridges (see 6.6.1) at -65°F and then holding for 55 minutes. The temperature shall then be raised to +200°F within 5 minutes and maintained for a period of 40 minutes. The temperature shall then be lowered to -65°F within 5 minutes and maintained for a period of 10 minutes. The change in temperature from -65°F to +200°F and return to -65°F shall constitute one cycle of 105 minutes duration, nominal. The test shall subject the cartridges to 20 cycles. Tolerance for temperatures shall be ± 5°F. Tolerance for conditioning times shall be +5 minutes with the transition time a maximum of 5 minutes. Each cartridge shall meet the requirements of 3.4.5.

4.3.12 Ballistic tests. Ballistic testing shall be conducted by separating the sample and conditioning the cartridges at -65, +70, and +200°F. The cartridge shall be taped, using pressure sensitive tape per PPP-T-60, Type IV, to the 2024 aluminum dent block. Conditioning time shall range between 4 hours minimum and 24 hours maximum. The tolerance for conditioning temperatures shall be ± 5°F. The cartridge shall be fired within 5 minutes after removal from the conditioning oven or it shall be reconditioned. The cartridge may be fired in a protective chamber or in a text fixture per Drawing 838AS185 as shown in figure 2, by applying a current of 5.0 amperes at 28 volts to the circuit using pins A and B.

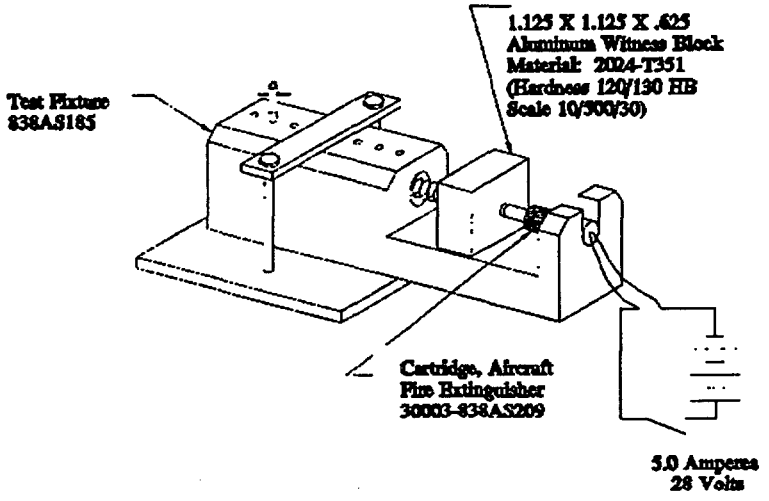


FIGURE 2. Overall dent block test setup.

4.3.12.1 Ignition delay. The ignition delay shall be measured from the first application of firing current until the first sign of loss of circuit continuity. Each cartridge shall meet the requirements of 3.4.6.1.

4.3.12.2 Indent depth. The witness block material shall be 2024-T351 aluminum. The witness block shall only be used once. The indent depth shall be measured from the pristine surface area of the witness block to the deepest part of the indent. Each cartridge

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

shall meet the requirements of 3.4.6.2.

4.3.12.3 Test failure. If a test failure is attributable to an assignable cause, excluding the test cartridges, the original test results shall be discarded and the test reconducted.

5. PACKAGING

5.1 Preservation, packaging, and packing. Preservation, packaging, and packing shall be Level A and shall be in accordance with 49 CFR 100-199 and NAVSUPINST 4030.28. The contractor shall also comply with all applicable transportation regulations.

5.1.1 Level A packaging. Level A preservation and packing (see 6.6), as specified in 5.1.1.1 through 5.1.1.3, shall be used for packaging of all production lot for service use. Unless otherwise specified in the contract or purchase order (see 6.2), the number of inner containers per pack is optional.

5.1.1.1 Inner pack. A conductive rubber shorting device shall be inserted over the cartridge connector pins. A protective cap shall be installed on the output end of the fire extinguisher cartridge. Special preservatives and lubricants shall not be applied to either end. Each cartridge shall be individually sealed in a heat sealed anti-static plastic bag in accordance with MIL-B-81705, Type I or II.

5.1.1.2 Intermediate pack. Four (4) cartridges, packaged in accordance with 5.1.1.1, shall be tightly packed in a hermetically sealed container which meets the requirements of MIL-C-10464, Type 1. Adequate support and cushioning shall be provided for the packaged item.

5.1.1.3 Outer pack. Cartridges packaged in accordance with 5.1.1.1 and 5.1.1.2 shall be packaged in a nailed wood box conforming to PPP-B-621, Class 2, Style 4 or 4 1/2 or in a cleated plywood box conforming to PPP-B-601, Overseas Type, Style A or B.

5.2 Marking.

5.2.1 Special marking. Marking of outer containers shall be in accordance with Code of Federal Regulations 49 CFR 100-199.

5.2.2 Normal marking. Unless otherwise specified in the contract or purchase order (see 6.2), the marking on the inner, intermediate, and outer containers shall be as specified below. The specified markings shall be applied to the containers in accordance with the applicable provisions of MIL-STD-129-1.

a. Inner Container Marking

(1) NSN
(2) DODIC
(3) Cartridge, Aircraft Fire Extinguisher, CCU-122/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

(4) 30003-838AS209
(5) Lot number (assigned in accordance with MIL-STD-1168)

b. Intermediate Container Marking

(1) NSN
(2) DODIC
(3) Cartridge, Aircraft Fire Extinguisher, CCU-122/A
(4) 30003-838AS209
(5) Quantity
(6) Lot number (assigned in accordance with MIL-STD-1168)
(7) DOT Explosive Class 1.4S

c. Outer Container Marking

(1) NSN
(2) DODIC
(3) Cartridge, Fire Extinguisher, CCU-122/A
(4) NAVAIR Drawing No. 30003-838AS209
(5) Quantity
(6) Gross weight and cube
(7) Lot number in accordance with MIL-STD-1168
(8) Contract/purchase order number
(9) WARNING: CARTRIDGES, POWER DEVICES
(10) DOT Explosive Class 1.4S
(11) UN Number 0323
(12) UN proper name
(13) Performance oriented pakaging (POF) identification

5.2.3 Bar Coding. Unless otherwise specified in the contract or purchase order (see 6.2), the outer container shall be bar coded in accordance with MIL-STD-129-1, Part 2.

5.3 Explanation of terms. For the purpose of this specification NAVSUPINST 4030.28, Paragraphs 1-4, 2-2, and 2-3, and Appendix A, when applicable, shall be used to clarify packaging terms.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended Use. The cartridge is intended for use in releasing fire extinguishing agent into the area surrounding an aircraft engine in the event of fire. This cartridge is used in the EA-6B fire extinguishing system.

6.2 Acquisition requirements. Acquisition documents must specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.1.2).

c. Production test activity (see 4.1 and 4.2.2).

d. Whether first article inspection is required and, if so, specify the test activity (see 4.2.1).

e. Number of inner containers per pack if not optional (see 5.1.1).

f. Marking if other than as specified (see 5.2.2).

g. If bar coding is not required on outer container (see 5.2.3).

h. That the safety requirements of the "Contractor's Safety Manual for Ammunition, Explosives and Related Dangerous Material" (DOD 4145.26M) are applicable (see 6.5).

6.3 First article. When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, standard production item from the contractor's current inventory (see 3.1) and the number of items to be tested as specified in 4.2.1. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Loaded assembly hazard information.

DOD, DOT, NATO Hazard Classification -	Class 1, Division 4
United Nation Serial Number -	0323
Storage Compatibility Grouping -	S
DOD Markings -	Cartridges, Power Device

6.5 Safety precautions. The safety precaution requirements of the "Contractor's Safety Manual for Ammunition and Explosives" (DOD 4145.26M), are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

NOTE: When this specification is used as part of the description of work to be accomplished by a Government activity, the safety requirements of "Ammunition and Explosives Ashore" OP 5 are applicable.

6.6 Definitions.

6.6.1 Stabilized. A stabilized cartridge is the same temperature throughout.

6.6.2 Level A packaging. The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration, and physical damage during shipment, handling, indeterminate storage, and world-wide redistribution.

6.6.3 Level A packing. The degree of packing which will afford adequate protection during shipment, handling, indeterminate storage, and world-wide distribution.

6.7 Subject term (key word) listing.

Aircraft engine compartment
Cartridge activated devices
Electric initiator
Fire extinguishing system
Ignition charge

Preparing Activity:
Navy - OS
(Project 1377-NE51)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-82899(OS)	940104

3. DOCUMENT TITLE

CARTRIDGE, FIRE EXTINGUISHER, CCU-122/A

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
COMMANDER, INDIAN HEAD DIVISION NAVAL SURFACE WARFARE CENTER (CODE 8420)	(1) Commercial 301-743-4358/4510	(2) AUTOVON 354-4358/4510
c. ADDRESS (Include Zip Code) 101 STRAUSS AVENUE INDIAN HEAD, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:30Z
Check the source to verify that this is the current version before use.