INCH-POUND

MS22058E
06 March 2017
SUPERSEDING
MS22058D
21 March 2005

DETAIL SPECIFICATION SHEET

CONNECTOR, OXYGEN HOSE TO REGULATOR

Reactivated after 21 March 2005 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-19064.

CLASSIFICATION:

- 1 ASSY - Type I (Figure 1)

- 2 ASSY - Type II (Figure 2)

Part or Identifying Number (PIN):

MS22058-1 - Connector, Oxygen Hose to Regulator, Type I

MS22058-2 - Connector, Oxygen Hose to Regulator, Type II

Unless otherwise specified, tolerances: decimals ± 0.010; angles ± 1 degree.

AMSC N/A FSC 1660

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

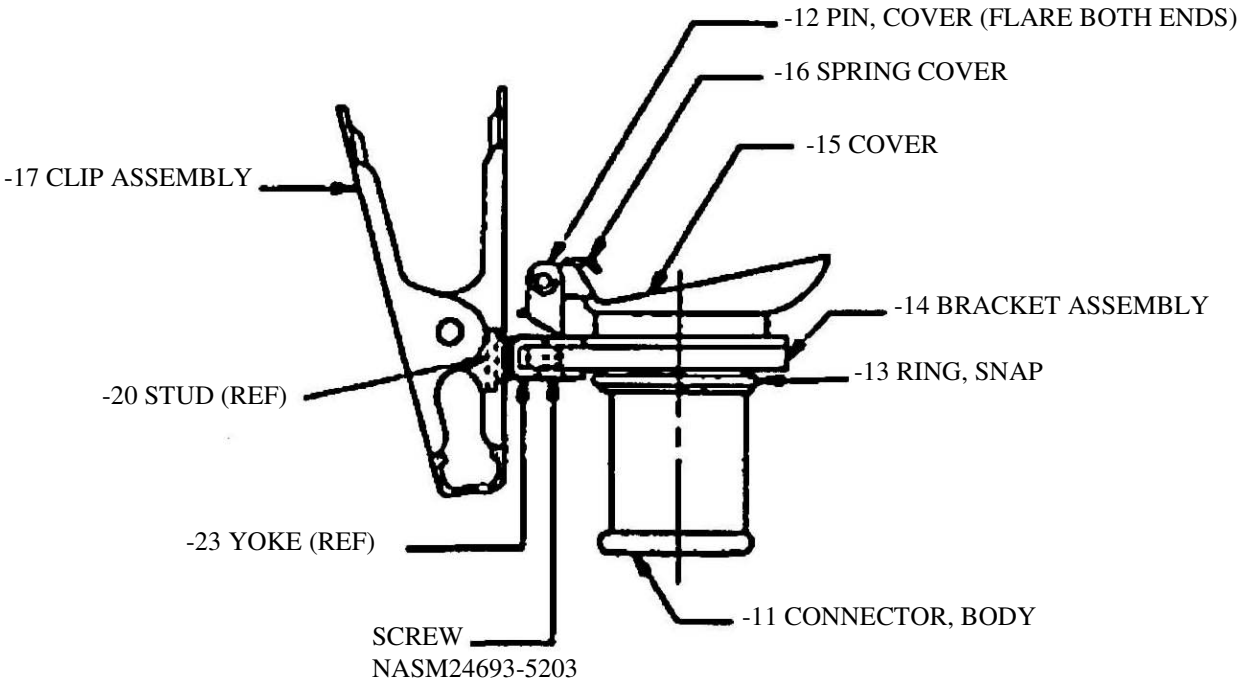


FIGURE 1. -1 ASSY.


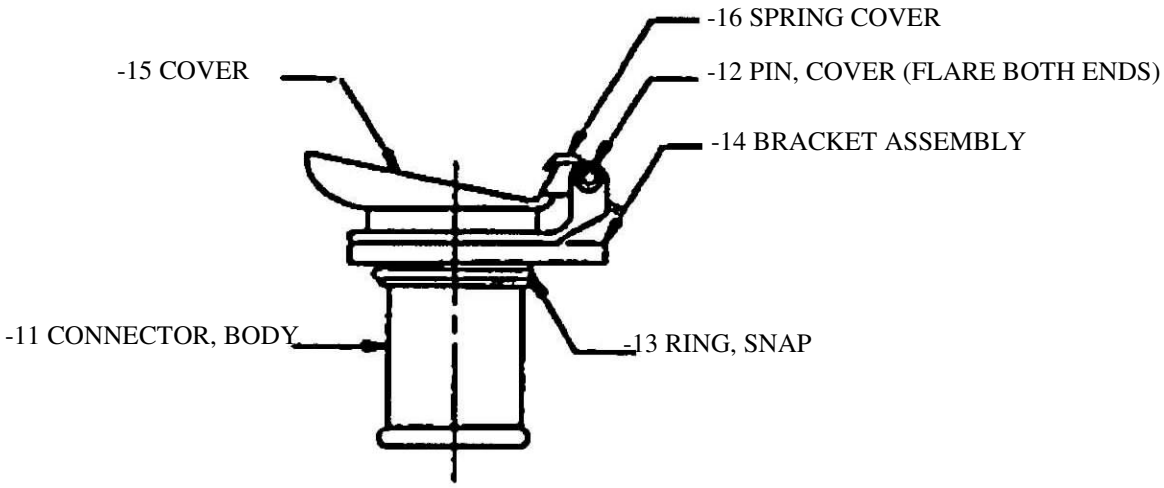


FIGURE 2. -2 ASSY.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

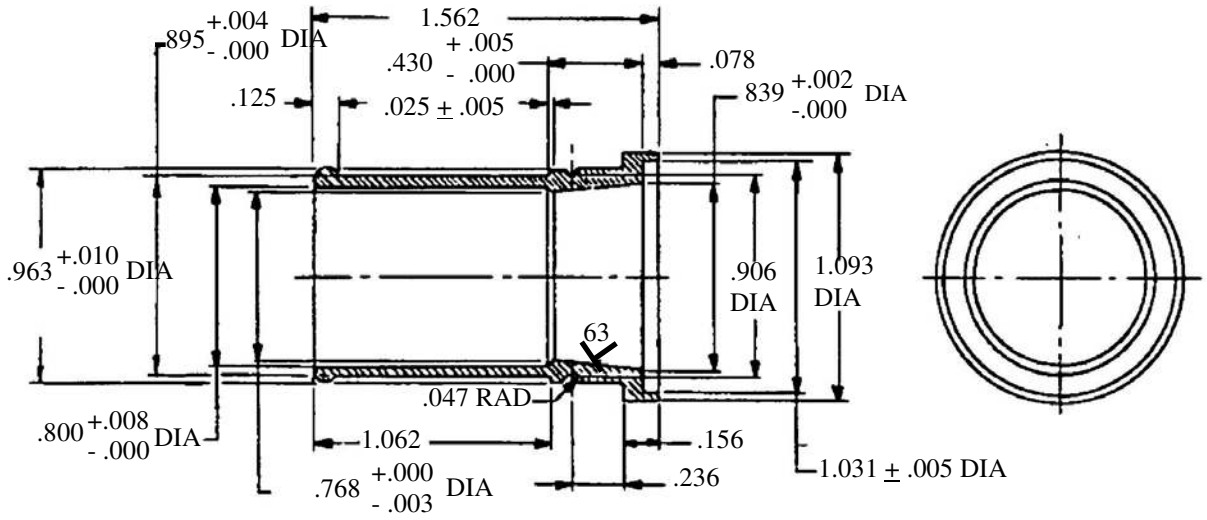

NOTES:

1. Material: Brass, ASTM B16/B16M, ½ hard, UNS C36000.
2. Finish: Nickel plate per SAE AMS-C-26074, class I, grade B.
3. Break sharp edges, 0.005 max radius.
4. Surface texture in accordance with ASME B46.1.

FIGURE 3. -11 Connector, body.

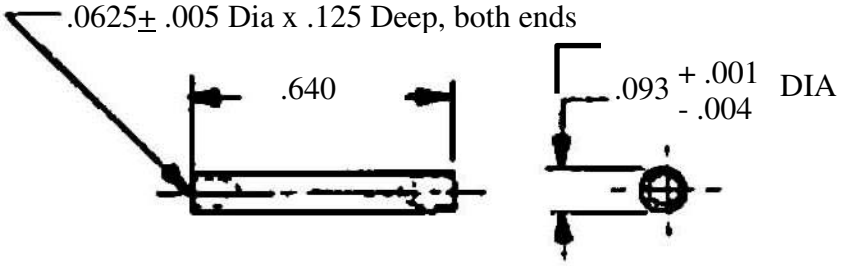


NOTES:

1. Material: Brass, ASTM B16/B16M, ½ hard, UNS C36000.
2. Optional Material: Brass Tubing, ASTM B135.
3. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
4. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.

FIGURE 4. -12 Pin, cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

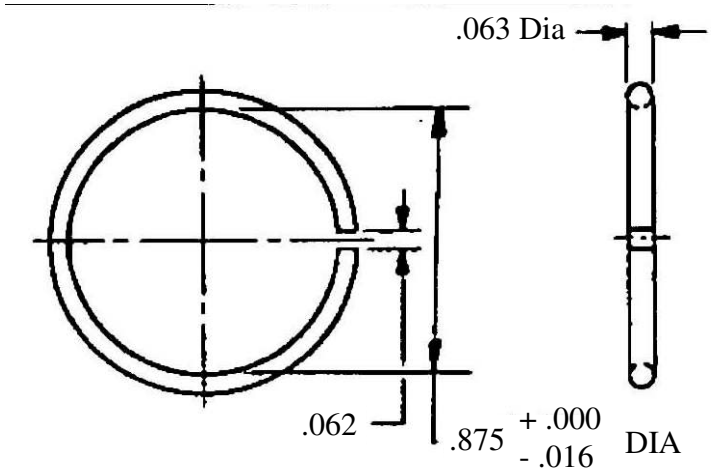


NOTES:

1. Material: Music/spring wire, ASTM A228/A228M, ASTM A313/A313M.
2. Finish: Passivate ASTM A313/A313M in accordance with ASTM A967/A967M.
3. Heat ring 500 to 550 °F for 20 minutes after forming.

FIGURE 5. -13 Ring, snap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

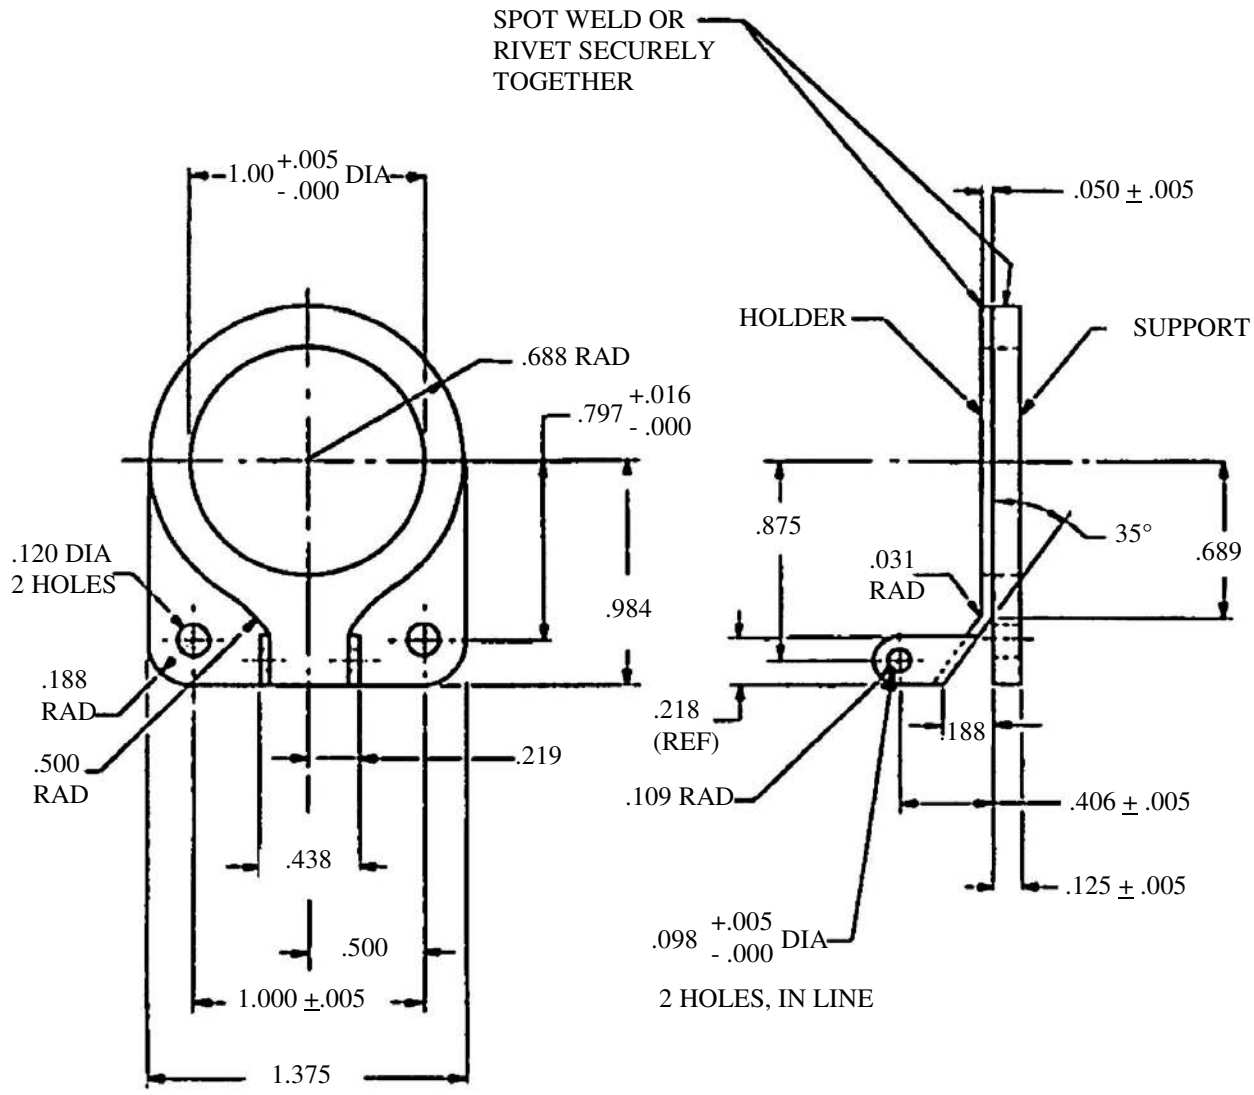


NOTES:

1. Material: Steel sheet, ASTM A1008/A1008M (AISI 1008/1010), cold rolled.
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
4. Remove all burrs and sharp edges.

FIGURE 6. -14 Bracket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

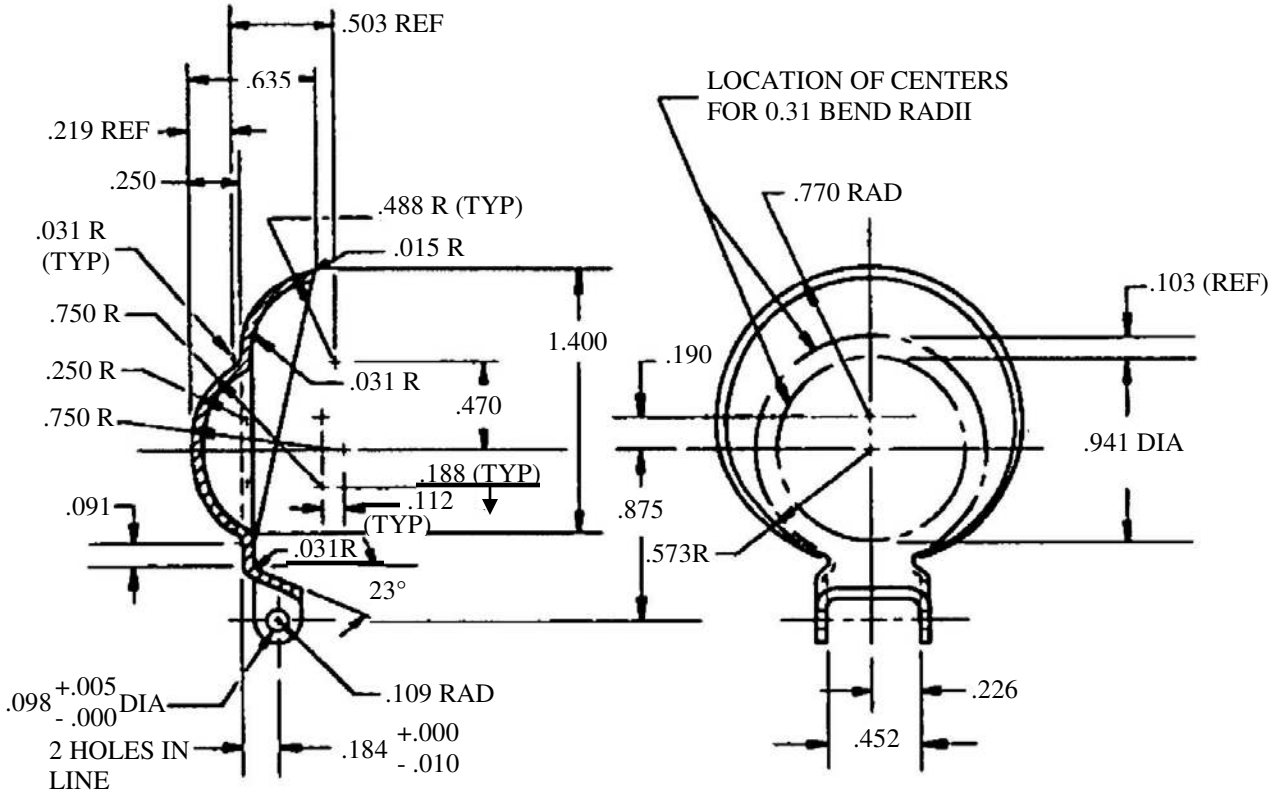


NOTES

1. Material: Aluminum alloy, SAE AMS-QQ-A-250, temper O, 0.051 thick.
2. Finish: Anodize, MIL-A-8625, Type I.
3. Heat treat after forming to SAE AMS-2772.
4. Remove all burrs and sharp edges, 0.010 min radius.

FIGURE 7. -15 Cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

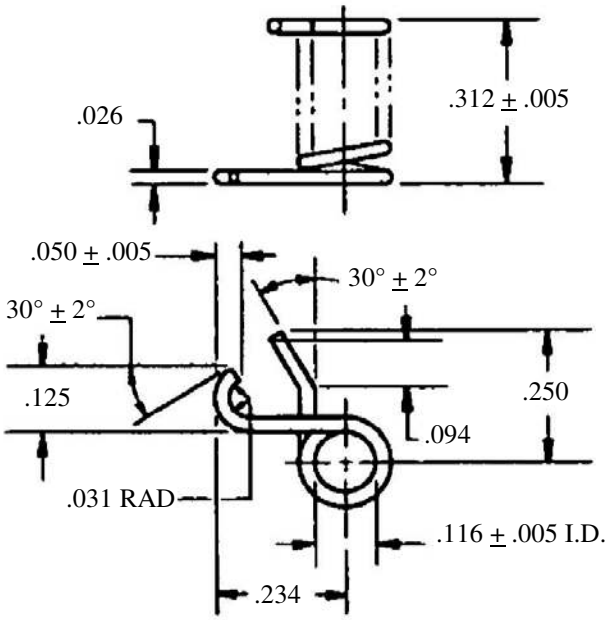

NOTES:

1. Material: Music wire, ASTM A228/A228M.
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
4. Number of coils: 7
5. Load not critical: Heat spring 500 to 550 °F for five minutes after forming.

FIGURE 8. -16 Spring, cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.


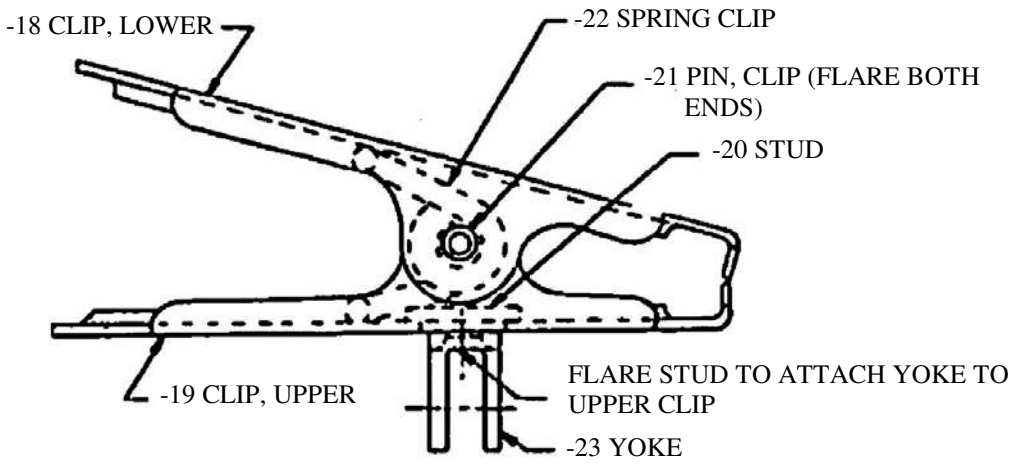


FIGURE 9. -17 Clip assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

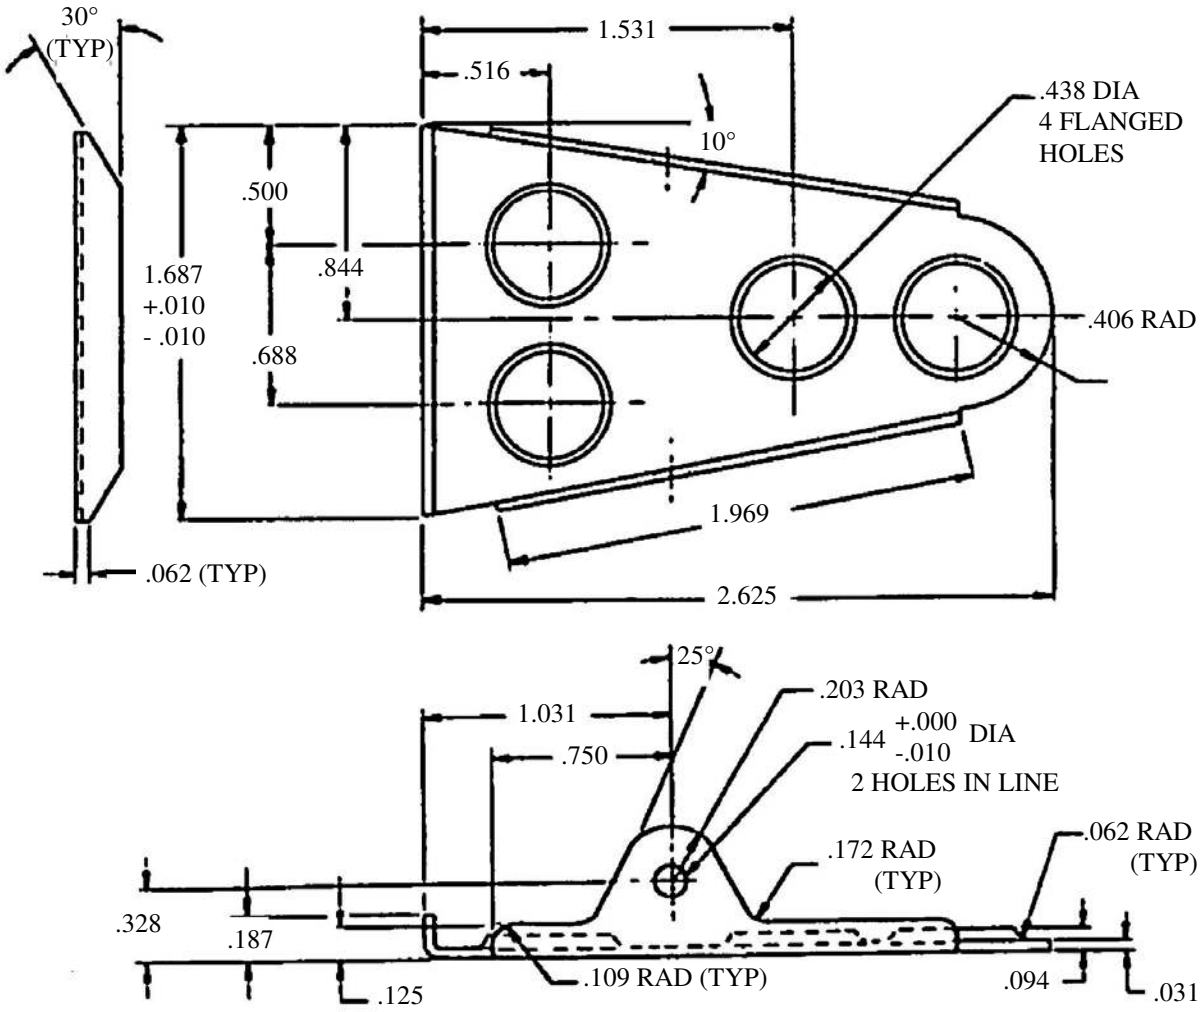


NOTES:

1. Material: Steel sheet, ASTM A1008/1008M (AISI 1008/1010), cold rolled.
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
3. All bends 0.016 radius unless otherwise specified.
4. Remove all burrs.

FIGURE 10. -18 Clip, lower.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

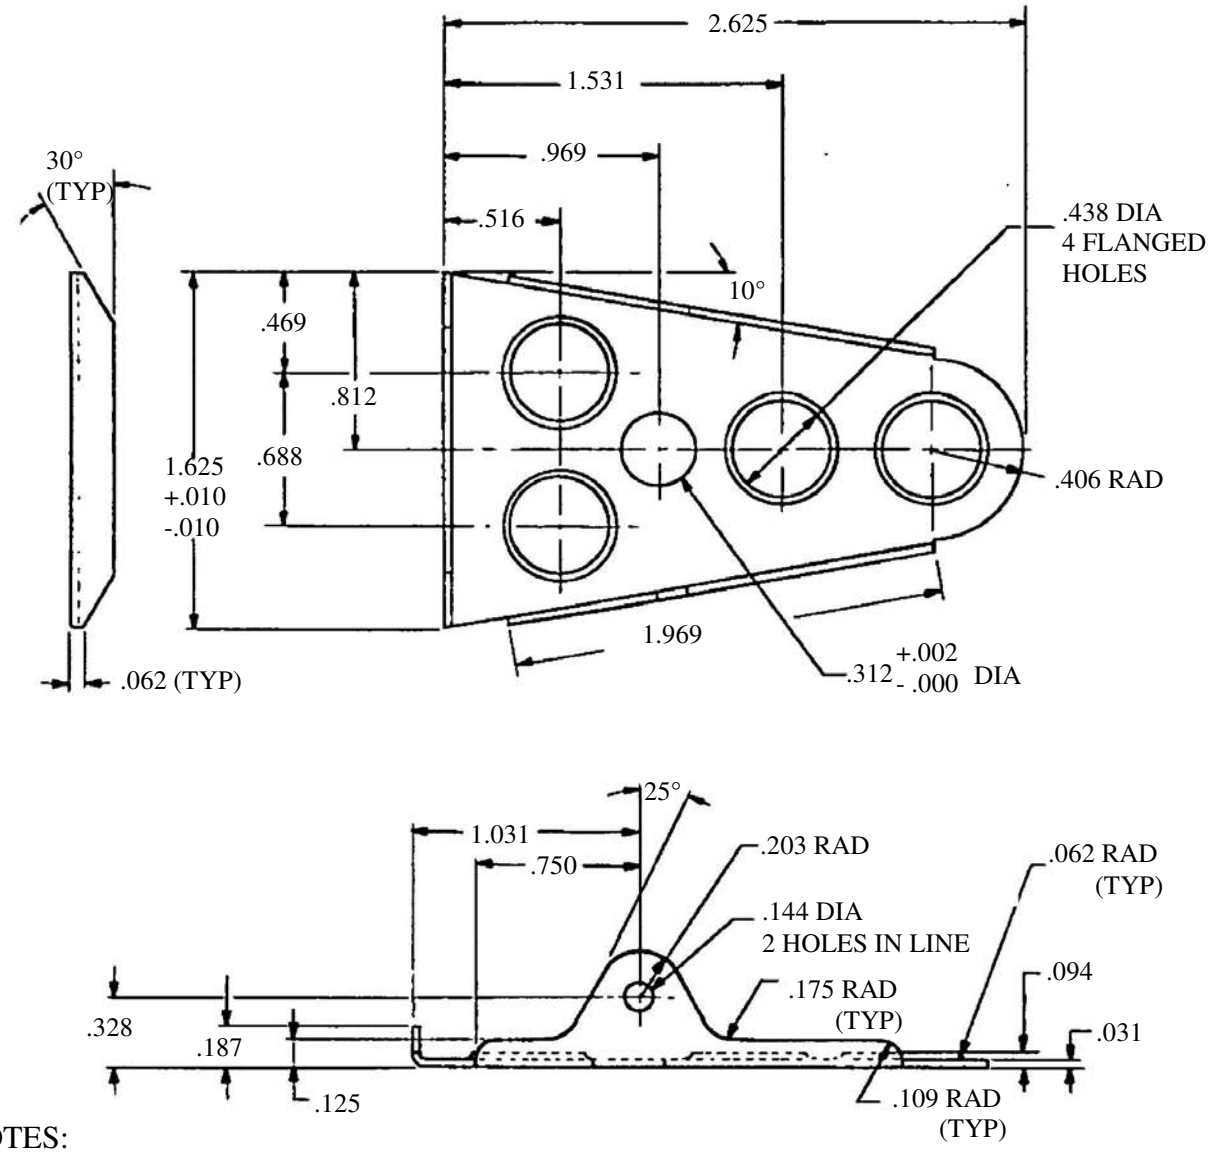


NOTES:

1. Material: Steel sheet, ASTM A1008/1008M (AISI 1008/1010), cold rolled.
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
4. All bends 0.016 radius unless otherwise specified.
5. Remove all burrs.

FIGURE 11. -19 Clip, upper.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

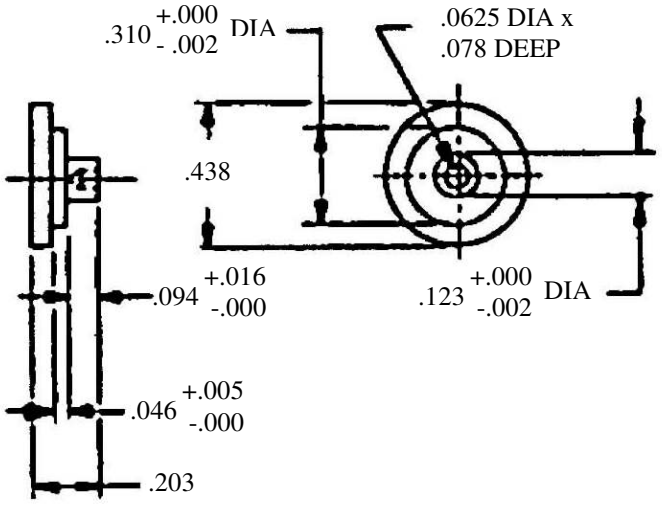

NOTES:

1. Material: Steel bars, ASTM A108, grade 1018/1020, cold rolled;
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
4. Break sharp edges, 0.005 max radius.

FIGURE 12. -20 Stud.

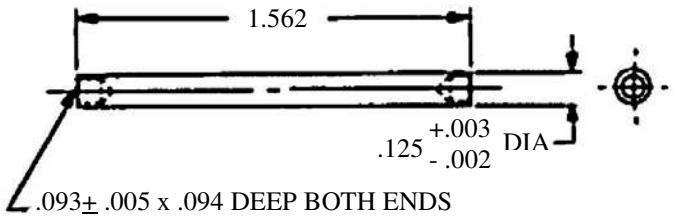


NOTES:

1. Material: Brass, ASTM B16/B16M, ½ hard, UNS C36000.
2. Optional material: Brass tubing, ASTM B135.
3. Finish: ASTM B633, FE/ZN 13, Type I.

FIGURE 13. -21 Pin, clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

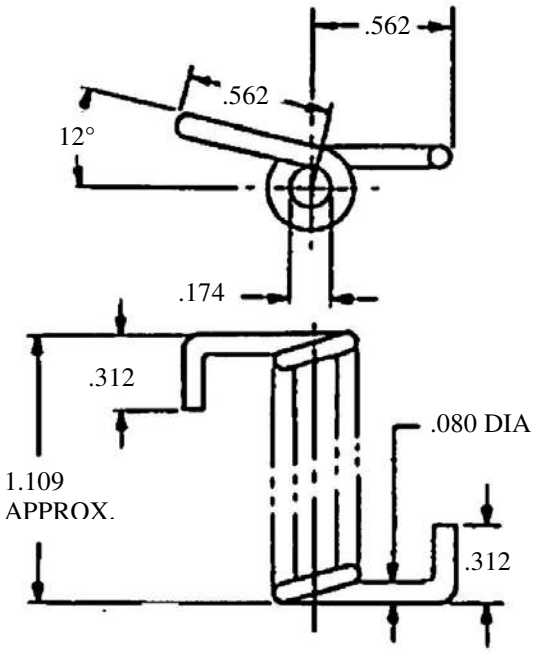


NOTES:

1. Material: Music wire, ASTM A228/A228M.
2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.
3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.
4. Heat spring 500 to 550 °F for 20 minutes after forming.
5. Thirteen turns, close wound; load not critical.

FIGURE 14. -22 Spring clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

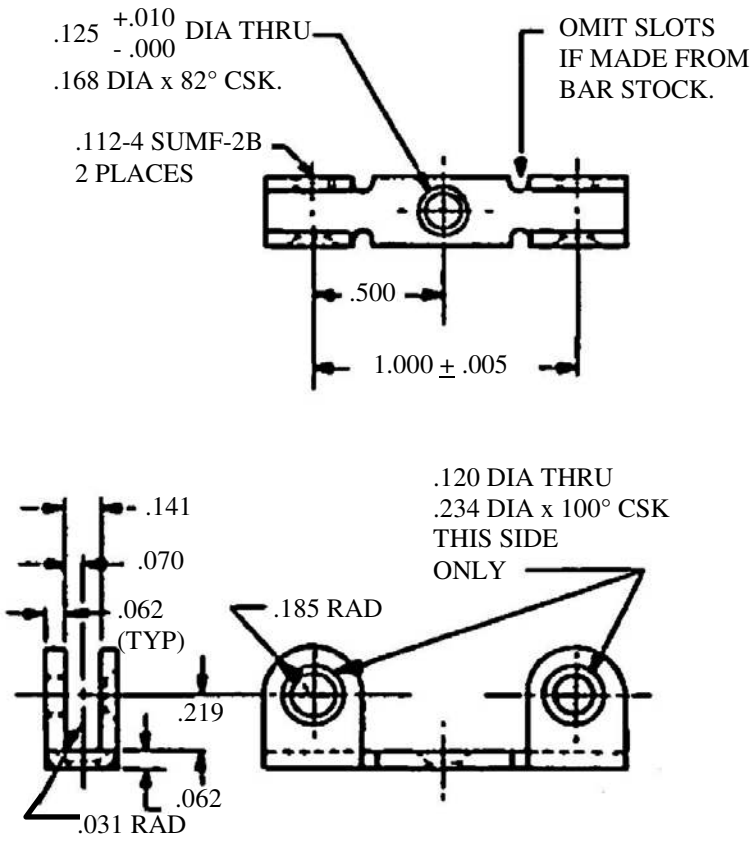

NOTES:

1. Material: Steel sheet, ASTM A1008/A1008M (AISI 1008/1010), cold rolled; steel bars, ASTM A108, grade 1020.

2. Finish: Zinc plating, ASTM B633, FE/ZN 12, Type I.

3. Optional Finish: Zinc plating, ASTM B633, FE/ZN 12, Type III.

4. Break sharp corners, 0.005 max radius.

5. Threads shall be in accordance with FED-STD-H28.

FIGURE 15. -23 Yoke.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS

(Project 1660-2017-001)

Review activities:
Army - GL
Air Force - 11, 71
DLA - GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.