
METRIC

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, COILED, LIGHT DUTY, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63477.

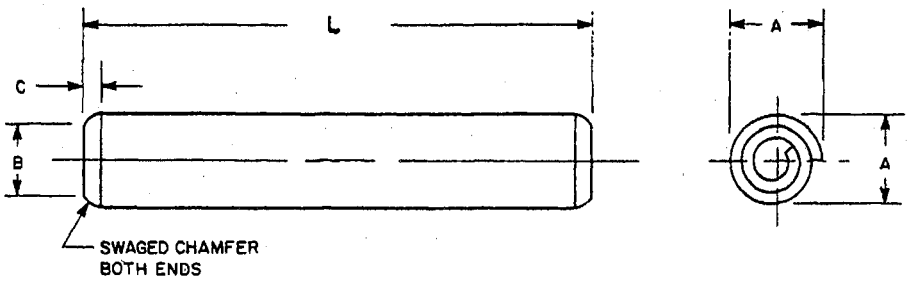

NOTE:

Unless otherwise specified, dimensions are in millimeters.

FIGURE 1. Pin, spring, tubular, coiled, light duty.

REQUIREMENTS

1. Material: Carbon steel, 1070 thru 1095.
2. Protective finish: Cadmium plating (code C); Phosphate coating (code P).
3. Part number: Consists of the letter "D" the basic number of this specification sheet, the dash number taken from table I and a finish code identifier.

Example: D63477/3-43C

- finish code identifier
- dash number
- specification sheet number

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Nominal size		1.5	2	2.5	3	4	5	6	8
A Diameter	max	1.75	2.28	2.82	3.35	4.45	5.50	6.55	8.65
	min	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30
B Chamfer diameter	max	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80
C Chamfer length	ref	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0
Recommended hole size	max	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00
Min double shear force (kN)		0.0	0.0	1.7	2.8	4.9	7.8	11.2	19.3

L - Length	Tol	Dash numbers							
4	+0.5 0	3	33						
6	+0.5 0	4	34	64					
8	+0.5 0	5	35	65	95				
10	+0.5 0	6	36	66	96	126			
12	+1.0 0	7	37	67	97	127	157	187	
14	+1.0 0	8	38	68	98	128	158	188	
16	+1.0 0	9	39	69	99	129	159	189	
18	+1.0 0	10	40	70	100	130	160	190	220
20	+1.0 0	11	41	71	101	131	161	191	221
22	+1.0 0	12	42	72	102	132	162	192	222
24	+1.0 0	13	43	73	103	133	163	193	223
26	+1.0 0	14	44	74	104	134	164	194	224
28	+1.0 0	15	45	75	105	135	165	195	225
30	+1.0 0		46	76	106	136	166	196	226
32	+1.0 0		47	77	107	137	167	197	227
36	+1.0 0		48	78	108	138	168	198	228

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers. - Continued

Nominal size		1.5	2	2.5	3	4	5	6	8
A Diameter	max	1.75	2.28	2.82	3.35	4.45	5.50	6.55	8.65
	min	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30
B Chamfer diameter	max	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80
C Chamfer length	ref	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0
Recommended hole size	max	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15
	min	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00
Min double shear force (kN)		0.0	0.0	1.7	2.8	4.9	7.8	11.2	19.3
L - Length	Tol	Dash numbers							
40	+1.0 0		49	79	109	139	169	199	229
45	+1.0 0			80	110	140	170	200	230
50	+1.0 0					141	171	201	231
55	+1.5 0						172	202	232
60	+1.5 0						173	203	233
65	+1.5 0								234
70	+1.5 0								235
75	+1.5 0								236
80	+1.5 0								237
85	+1.5 0								238
90	+1.5 0								239
95	+1.5 0								240
100	+1.5 0								241

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - ER, MI
DLA-IS
NSA-NS

User activities:
Army - AV, CE, ME
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA-IS

(Project 5315-0344)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.