
INCH-POUND
MIL-PRF-55514/4E
22 March 1999
SUPERSEDING
MIL-C-55514/4D
9 October 1997

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC DIELECTRIC, DC, IN NONMETAL CASES, ESTABLISHED RELIABILITY AND NON-ESTABLISHED RELIABILITY, STYLES CFR05 AND CFR06

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-55514.

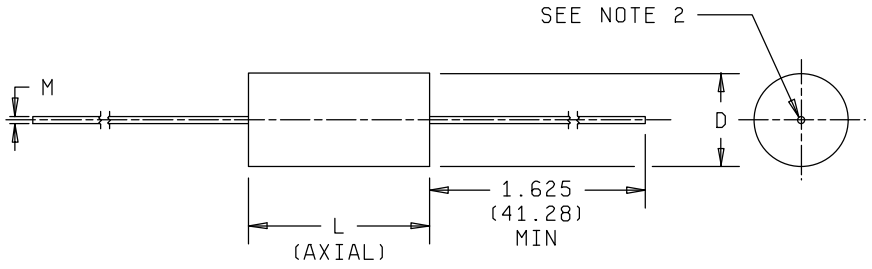


NOTES:
1. Dimensions are in inches.
2. Leads shall be of solid wire and located on centerline within ±.062 (1.57) but not less than .03 (.76) from edge of capacitor.
3. Millimeters are in parentheses.
4. Metric equivalents are given for general information only.

FIGURE 1. Style CFR05 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

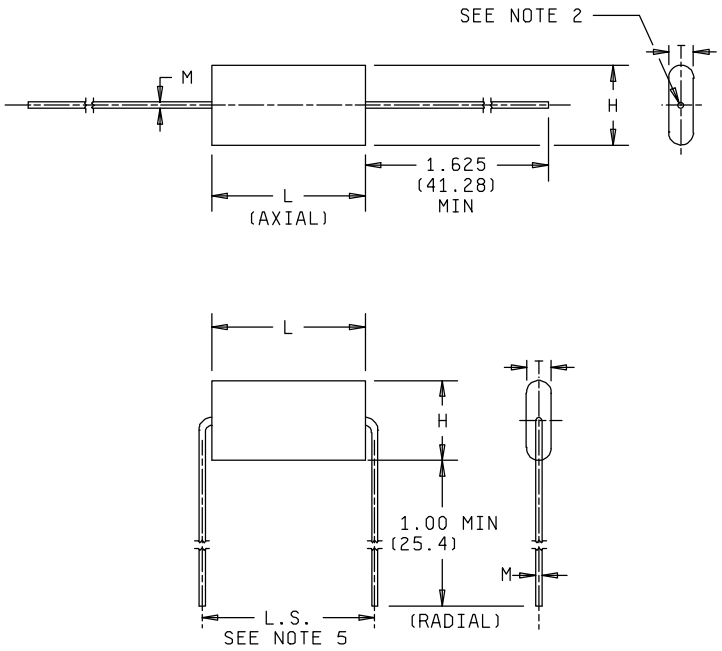

NOTES:
1. Dimensions are in inches.
2. Leads shall be of solid wire and located on centerline within ±.062 inch (1.57 mm) but not less than .03 inch (0.76 mm) from edge of capacitor.
3. Millimeters are in parentheses.
4. Metric equivalents are given for general information only.
5. L. S. shall be (L +2M) ±.030 inch (0.76 mm).

FIGURE 2. Style CFR06 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE 1. Capacitor characteristics.

CHARACTERISTIC R - STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions (in inches)		
				D 3/	L ±.050 (1.27)	M 2/ Axial
CFR05ARA102- -	.0010	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA122- -	.0012	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA152- -	.0015	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA182- -	.0018	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA222- -	.0022	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA272- -	.0027	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA332- -	.0033	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA392- -	.0039	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA472- -	.0047	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA562- -	.0056	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA682- -	.0068	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA822- -	.0082	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA103- -	.010	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA123- -	.012	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA153- -	.015	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA183- -	.018	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA223- -	.022	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA273- -	.027	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA333- -	.033	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA393- -	.039	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA473- -	.047	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA563- -	.056	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA683- -	.068	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA823- -	.082	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA104- -	.10	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA124- -	.12	50	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARA154- -	.15	50	F, G, J, K	.160 (4.06)	.400 (10.16)	.020 (.51)
CFR05ARA184- -	.18	50	F, G, J, K	.150 (3.81)	.530 (13.46)	.020 (.51)
CFR05ARA224- -	.22	50	F, G, J, K	.150 (3.81)	.530 (13.46)	.020 (.51)
CFR05ARA274- -	.27	50	F, G, J, K	.160 (4.06)	.530 (13.46)	.020 (.51)
CFR05ARA334- -	.33	50	F, G, J, K	.180 (4.57)	.530 (13.46)	.020 (.51)
CFR05ARA394- -	.39	50	F, G, J, K	.190 (4.83)	.530 (13.46)	.020 (.51)
CFR05ARA474- -	.47	50	F, G, J, K	.200 (5.08)	.530 (13.46)	.020 (.51)
CFR05ARA564- -	.56	50	F, G, J, K	.220 (5.59)	.530 (13.46)	.020 (.51)
CFR05ARA684- -	.68	50	F, G, J, K	.240 (6.10)	.530 (13.46)	.020 (.51)
CFR05ARA824- -	.82	50	F, G, J, K	.260 (6.60)	.530 (13.46)	.020 (.51)
CFR05ARA105- -	1.0	50	F, G, J, K	.280 (7.11)	.530 (13.46)	.020 (.51)
CFR05ARA125- -	1.2	50	F, G, J, K	.260 (6.60)	.680 (17.27)	.020 (.51)
CFR05ARA155- -	1.5	50	F, G, J, K	.280 (7.11)	.680 (17.27)	.020 (.51)
CFR05ARA185- -	1.8	50	F, G, J, K	.290 (7.37)	.780 (19.81)	.020 (.51)
CFR05ARA205- -	2.0	50	F, G, J, K	.300 (7.62)	.780 (19.81)	.020 (.51)
CFR05ARA255- -	2.5	50	F, G, J, K	.340 (8.64)	.780 (19.81)	.020 (.51)
CFR05ARA305- -	3.0	50	F, G, J, K	.370 (9.40)	.780 (19.81)	.025 (.64)
CFR05ARA355- -	3.5	50	F, G, J, K	.400 (10.16)	.780 (19.81)	.025 (.64)
CFR05ARA405- -	4.0	50	F, G, J, K	.370 (9.40)	.950 (24.13)	.025 (.64)
CFR05ARA455- -	4.5	50	F, G, J, K	.390 (9.91)	.950 (24.13)	.025 (.64)
CFR05ARA505- -	5.0	50	F, G, J, K	.360 (9.14)	1.170 (28.73)	.025 (.64)
CFR05ARA605- -	6.0	50	F, G, J, K	.390 (9.91)	1.170 (28.73)	.025 (.64)
CFR05ARA805- -	8.0	50	F, G, J, K	.450 (11.43)	1.170 (28.73)	.025 (.64)
CFR05ARA106- -	10.0	50	F, G, J, K	.500 (12.70)	1.170 (28.73)	.032 (.81)
CFR05ARA126- -	12.0	50	F, G, J, K	.540 (13.72)	1.170 (28.73)	.032 (.81)
CFR05ARA156- -	15.0	50	F, G, J, K	.600 (15.24)	1.170 (28.73)	.032 (.81)
CFR05ARA186- -	18.0	50	F, G, J, K	.580 (14.73)	1.450 (36.33)	.032 (.81)
CFR05ARA206- -	20.0	50	F, G, J, K	.610 (15.49)	1.450 (36.33)	.032 (.81)
CFR05ARA256- -	25.0	50	F, G, J, K	.580 (14.73)	1.900 (48.20)	.032 (.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE 1. Capacitor characteristics - Continued.

CHARACTERISTIC R - STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions (in inches)		
				D 3/	L ±.050 (1.270)	M 2/ Axial
CFR05ARA306- -	30.0	50	F, G, J, K	.610 (15.49)	1.900 (48.20)	.032 (.81)
CFR05ARA356- -	35.0	50	F, G, J, K	.660 (16.76)	1.900 (48.20)	.032 (.81)
CFR05ARA406- -	40.0	50	F, G, J, K	.700 (17.78)	1.900 (48.20)	.032 (.81)
CFR05ARA506- -	50.0	50	F, G, J, K	.780 (19.81)	1.900 (48.20)	.032 (.81)
CFR05ARB102- -	.0010	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB122- -	.0012	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB152- -	.0015	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB182- -	.0018	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB222- -	.0022	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB272- -	.0027	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB333- -	.0033	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB392- -	.0039	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB472- -	.0047	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB562- -	.0056	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB682- -	.0068	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB822- -	.0082	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB103- -	.010	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB123- -	.012	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB153- -	.015	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB183- -	.018	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB223- -	.022	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB273- -	.027	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB333- -	.033	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB393- -	.039	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB473- -	.047	100	F, G, J, K	.150 (3.81)	.400 (10.16)	.020 (.51)
CFR05ARB563- -	.056	100	F, G, J, K	.160 (4.06)	.400 (10.16)	.020 (.51)
CFR05ARB683- -	.068	100	F, G, J, K	.180 (4.57)	.400 (10.16)	.020 (.51)
CFR05ARB823- -	.082	100	F, G, J, K	.150 (3.81)	.530 (13.46)	.020 (.51)
CFR05ARB104- -	.10	100	F, G, J, K	.160 (4.06)	.530 (13.46)	.020 (.51)
CFR05ARB124- -	.12	100	F, G, J, K	.170 (4.32)	.530 (13.46)	.020 (.51)
CFR05ARB154- -	.15	100	F, G, J, K	.190 (4.83)	.530 (13.46)	.020 (.51)
CFR05ARB184- -	.18	100	F, G, J, K	.200 (5.08)	.530 (13.46)	.020 (.51)
CFR05ARB224- -	.22	100	F, G, J, K	.220 (5.59)	.530 (13.46)	.020 (.51)
CFR05ARB274- -	.27	100	F, G, J, K	.240 (6.10)	.530 (13.46)	.020 (.51)
CFR05ARB334- -	.33	100	F, G, J, K	.260 (6.60)	.530 (13.46)	.020 (.51)
CFR05ARB394- -	.39	100	F, G, J, K	.290 (7.37)	.530 (13.46)	.020 (.51)
CFR05ARB474- -	.47	100	F, G, J, K	.260 (6.60)	.680 (17.27)	.020 (.51)
CFR05ARB564- -	.56	100	F, G, J, K	.290 (7.37)	.680 (17.27)	.020 (.51)
CFR05ARB684- -	.68	100	F, G, J, K	.290 (7.37)	.780 (19.81)	.020 (.51)
CFR05ARB824- -	.82	100	F, G, J, K	.310 (7.87)	.780 (19.81)	.020 (.51)
CFR05ARB105- -	1.0	100	F, G, J, K	.340 (8.64)	.780 (19.81)	.020 (.51)
CFR05ARB125- -	1.2	100	F, G, J, K	.370 (9.40)	.780 (19.81)	.025 (.64)
CFR05ARB155- -	1.5	100	F, G, J, K	.370 (9.40)	.950 (24.13)	.025 (.64)
CFR05ARB185- -	1.8	100	F, G, J, K	.400 (10.16)	.950 (24.13)	.025 (.64)
CFR05ARB205- -	2.0	100	F, G, J, K	.380 (9.65)	1.170 (28.73)	.025 (.64)
CFR05ARB255- -	2.5	100	F, G, J, K	.420 (10.67)	1.170 (28.73)	.025 (.64)
CFR05ARB305- -	3.0	100	F, G, J, K	.450 (11.43)	1.170 (28.73)	.025 (.64)
CFR05ARB355- -	3.5	100	F, G, J, K	.480 (12.19)	1.170 (28.73)	.032 (.81)
CFR05ARB405- -	4.0	100	F, G, J, K	.520 (13.21)	1.170 (28.73)	.032 (.81)
CFR05ARB455- -	4.5	100	F, G, J, K	.550 (13.97)	1.170 (28.73)	.032 (.81)
CFR05ARB505- -	5.0	100	F, G, J, K	.580 (14.73)	1.170 (28.73)	.032 (.81)
CFR05ARB605- -	6.0	100	F, G, J, K	.620 (15.75)	1.170 (28.73)	.032 (.81)
CFR05ARB805- -	8.0	100	F, G, J, K	.630 (16.00)	1.450 (36.83)	.032 (.81)
CFR05ARB106- -	10.0	100	F, G, J, K	.640 (16.25)	1.700 (43.18)	.032 (.81)
CFR05ARB126- -	12.0	100	F, G, J, K	.650 (16.51)	1.900 (48.20)	.032 (.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE 1. Capacitor characteristics - Continued.

CHARACTERISTIC R - STYLE CFR05 CAPACITORS						
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions (in inches)		
				D 3/	L ±.062 (1.57)	M 2/ Axial
CFR05ARB156- -	15.0	100	F, G, J, K	.720 (18.29)	1.900 (48.20)	.032 (.81)
CFR05ARB186- -	18.0	100	F, G, J, K	.780 (19.81)	1.900 (48.20)	.032 (.81)
CFR05ARB206- -	20.0	100	F, G, J, K	.820 (20.83)	1.900 (48.20)	.032 (.81)
CFR05ARC103- -	.010	200	F, G, J, K	.176 (4.47)	.469 (11.91)	.025 (.64)
CFR05ARC123- -	.012	200	F, G, J, K	.187 (4.75)	.469 (11.91)	.025 (.64)
CFR05ARC153- -	.015	200	F, G, J, K	.203 (5.16)	.469 (11.91)	.025 (.64)
CFR05ARC183- -	.018	200	F, G, J, K	.217 (5.51)	.469 (11.91)	.025 (.64)
CFR05ARC223- -	.022	200	F, G, J, K	.235 (5.97)	.469 (11.91)	.025 (.64)
CFR05ARC273- -	.027	200	F, G, J, K	.255 (6.48)	.469 (11.91)	.025 (.64)
CFR05ARC333- -	.033	200	F, G, J, K	.277 (7.04)	.469 (11.91)	.025 (.64)
CFR05ARC393- -	.039	200	F, G, J, K	.298 (7.57)	.469 (11.91)	.025 (.64)
CFR05ARC473- -	.047	200	F, G, J, K	.313 (7.95)	.469 (11.91)	.025 (.64)
CFR05ARC563- -	.056	200	F, G, J, K	.244 (6.20)	.656 (16.66)	.025 (.64)
CFR05ARC683- -	.068	200	F, G, J, K	.264 (6.71)	.656 (16.66)	.025 (.64)
CFR05ARC823- -	.082	200	F, G, J, K	.285 (7.24)	.656 (16.66)	.025 (.64)
CFR05ARC104- -	.10	200	F, G, J, K	.310 (7.87)	.656 (16.66)	.025 (.64)
CFR05ARC124- -	.12	200	F, G, J, K	.366 (9.30)	.656 (16.66)	.032 (.81)
CFR05ARC154- -	.15	200	F, G, J, K	.304 (7.72)	.781 (19.84)	.025 (.64)
CFR05ARC184- -	.18	200	F, G, J, K	.329 (8.36)	.781 (19.84)	.032 (.81)
CFR05ARC224- -	.22	200	F, G, J, K	.359 (9.12)	.781 (19.84)	.032 (.81)
CFR05ARC274- -	.27	200	F, G, J, K	.393 (9.98)	.781 (19.84)	.032 (.81)
CFR05ARC334- -	.33	200	F, G, J, K	.431 (10.95)	.781 (19.84)	.032 (.81)
CFR05ARC394- -	.39	200	F, G, J, K	.363 (9.22)	1.031 (26.19)	.032 (.81)
CFR05ARC474- -	.47	200	F, G, J, K	.395 (10.03)	1.031 (26.19)	.032 (.81)
CFR05ARC564- -	.56	200	F, G, J, K	.427 (10.85)	1.031 (26.19)	.032 (.81)
CFR05ARC684- -	.68	200	F, G, J, K	.467 (11.86)	1.031 (26.19)	.032 (.81)
CFR05ARC824- -	.82	200	F, G, J, K	.509 (12.93)	1.031 (26.19)	.032 (.81)
CFR05ARC105- -	1.0	200	F, G, J, K	.574 (14.58)	1.031 (26.19)	.032 (.81)
CFR05ARC125- -	1.2	200	F, G, J, K	.624 (15.85)	1.031 (26.19)	.032 (.81)
CFR05ARC155- -	1.5	200	F, G, J, K	.520 (13.21)	1.531 (39.89)	.032 (.81)
CFR05ARC185- -	1.8	200	F, G, J, K	.579 (14.71)	1.531 (39.89)	.032 (.81)
CFR05ARC205- -	2.0	200	F, G, J, K	.607 (15.42)	1.531 (39.89)	.032 (.81)
CFR05ARC255- -	2.5	200	F, G, J, K	.670 (17.02)	1.531 (38.89)	.032 (.81)
CFR05ARC305- -	3.0	200	F, G, J, K	.727 (18.47)	1.531 (39.89)	.032 (.81)
CFR05ARC355- -	3.5	200	F, G, J, K	.779 (19.79)	1.531 (39.89)	.032 (.81)
CFR05ARC405- -	4.0	200	F, G, J, K	.828 (21.03)	1.531 (39.89)	.032 (.81)
CFR05ARC455- -	4.5	200	F, G, J, K	.796 (20.22)	1.781 (45.24)	.032 (.81)
CFR05ARC505- -	5.0	200	F, G, J, K	.835 (21.21)	1.781 (45.24)	.032 (.81)
CFR05ARC755- -	7.5	200	F, G, J, K	.870 (22.10)	2.281 (57.94)	.032 (.81)
CFR05ARC106- -	10.0	200	F, G, J, K	.995 (25.27)	2.281 (57.94)	.032 (.81)
CFR05ARE103- -	.010	400	F, G, J, K	.301 (7.65)	.469 (11.91)	.025 (.64)
CFR05ARE123- -	.012	400	F, G, J, K	.325 (3.26)	.469 (11.91)	.032 (.81)
CFR05ARE153- -	.015	400	F, G, J, K	.251 (6.38)	.656 (16.66)	.025 (.64)
CFR05ARE183- -	.018	400	F, G, J, K	.270 (6.86)	.656 (16.66)	.025 (.64)
CFR05ARE223- -	.022	400	F, G, J, K	.294 (7.47)	.656 (16.66)	.025 (.64)
CFR05ARE273- -	.027	400	F, G, J, K	.321 (8.15)	.656 (16.66)	.032 (.81)
CFR05ARE333- -	.033	400	F, G, J, K	.350 (8.89)	.656 (16.66)	.032 (.81)
CFR05ARE393- -	.039	400	F, G, J, K	.377 (9.58)	.656 (16.66)	.032 (.81)
CFR05ARE473- -	.047	400	F, G, J, K	.335 (8.51)	.781 (19.84)	.032 (.81)
CFR05ARE563- -	.056	400	F, G, J, K	.367 (9.32)	.781 (19.84)	.032 (.81)
CFR05ARE683- -	.068	400	F, G, J, K	.395 (10.03)	.781 (19.84)	.032 (.81)
CFR05ARE823- -	.082	400	F, G, J, K	.429 (10.90)	.781 (19.84)	.032 (.81)
CFR05ARE104- -	.10	400	F, G, J, K	.367 (9.32)	1.031 (26.19)	.032 (.81)
CFR05ARE124- -	.12	400	F, G, J, K	.399 (10.13)	1.031 (26.19)	.032 (.81)
CFR05ARE154- -	.15	400	F, G, J, K	.441 (11.20)	1.031 (26.19)	.032 (.81)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE 1. Capacitor characteristics - Continued.

CHARACTERISTIC R - STYLE CFR05 CAPACITORS						
				Dimensions (in inches)		
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	D 3/	L ±.062 (1.57)	M 2/ Axial
CFR05ARE184- -	.18	400	F, G, J, K	.479 (12.17)	1.031 (26.19)	.032 (.81)
CFR05ARE224- -	.22	400	F, G, J, K	.414 (10.52)	1.531 (38.89)	.032 (.81)
CFR05ARE274- -	.27	400	F, G, J, K	.451 (11.46)	1.531 (38.89)	.032 (.81)
CFR05ARE334- -	.33	400	F, G, J, K	.491 (12.47)	1.531 (38.89)	.032 (.81)
CFR05ARE394- -	.39	400	F, G, J, K	.529 (13.44)	1.531 (38.89)	.032 (.81)
CFR05ARE474- -	.47	400	F, G, J, K	.590 (14.99)	1.531 (38.89)	.032 (.81)
CFR05ARE564- -	.56	400	F, G, J, K	.638 (16.21)	1.531 (38.89)	.032 (.81)
CFR05ARE684- -	.68	400	F, G, J, K	.695 (17.65)	1.531 (38.89)	.032 (.81)
CFR05ARE824- -	.82	400	F, G, J, K	.757 (19.23)	1.531 (38.89)	.032 (.81)
CFR05ARE105- -	1.0	400	F, G, J, K	.828 (21.03)	1.531 (38.89)	.032 (.81)
CFR05ARE125- -	1.2	400	F, G, J, K	.901 (22.89)	1.531 (38.89)	.032 (.81)
CFR05ARE155- -	1.5	400	F, G, J, K	.909 (23.09)	1.781 (45.24)	.032 (.81)
CFR05ARE185- -	1.8	400	F, G, J, K	.989 (25.12)	1.781 (45.24)	.032 (.81)
CFR05ARE205- -	2.0	400	F, G, J, K	1.039 (26.39)	1.781 (45.24)	.032 (.81)
CFR05ARE255- -	2.5	400	F, G, J, K	.995 (25.27)	2.281 (57.94)	.032 (.81)
CFR05ARE305- -	3.0	400	F, G, J, K	1.084 (27.53)	2.281 (57.94)	.032 (.81)
CFR05ARE355- -	3.5	400	F, G, J, K	1.166 (29.62)	2.281 (57.94)	.032 (.81)
CFR05ARE405- -	4.0	400	F, G, J, K	1.242 (31.55)	2.281 (57.94)	.032 (.81)
CFR05ARE455- -	4.5	400	F, G, J, K	1.236 (31.39)	2.531 (64.29)	.032 (.81)
CFR05ARE505- -	5.0	400	F, G, J, K	1.300 (33.02)	2.531 (64.29)	.032 (.81)

CHARACTERISTICS R - STYLE CFR06 CAPACITORS							
				Dimensions (in inches)			
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	T ±.050 (1.27)	H ±.050 (1.27)	L ±.050 (1.27) -.005 (.13)	M 2/ Radial and axial
CFR06-RA102- -	.0010	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA122- -	.0012	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA152- -	.0015	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA182- -	.0018	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA222- -	.0022	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA272- -	.0027	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA332- -	.0033	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA392- -	.0039	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA472- -	.0047	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA562- -	.0056	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA682- -	.0068	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA822- -	.0082	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA103- -	.010	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA123- -	.012	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA153- -	.015	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA183- -	.018	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA223- -	.022	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA273- -	.027	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA333- -	.033	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA393- -	.039	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA473- -	.047	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA563- -	.056	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA683- -	.068	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA823- -	.082	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA104- -	.10	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA124- -	.12	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RA154- -	.15	50	F ,G ,J ,K	.100 (2.54)	.200 (5.08)	.384 (9.75)	.016 (.41)
CFR06-RA184- -	.18	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.514 (13.06)	.016 (.41)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R - STYLE CFR06 CAPACITORS							
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions(in inches)			
				T ± .050 (1.27)	H ± .050 (1.27)	L ± .050 (1.27) -.005 (.13)	M 2/ Radial and axial
CFR06-RA224- -	.22	50	F ,G ,J ,K	.090 (2.29)	.180 (4.57)	.514 (13.06)	.016 (.41)
CFR06-RA274- -	.27	50	F ,G ,J ,K	.100 (2.54)	.190 (4.83)	.514 (13.06)	.016 (.41)
CFR06-RA334- -	.33	50	F ,G ,J ,K	.110 (2.79)	.210 (5.33)	.510 (12.95)	.020 (.51)
CFR06-RA394- -	.39	50	F ,G ,J ,K	.130 (3.30)	.220 (5.59)	.510 (12.95)	.020 (.51)
CFR06-RA474- -	.47	50	F ,G ,J ,K	.140 (3.56)	.240 (6.10)	.510 (12.95)	.020 (.51)
CFR06-RA564- -	.56	50	F ,G ,J ,K	.160 (4.06)	.250 (6.35)	.510 (12.95)	.020 (.51)
CFR06-RA684- -	.68	50	F ,G ,J ,K	.180 (4.57)	.270 (6.86)	.510 (12.95)	.020 (.51)
CFR06-RA824- -	.82	50	F ,G ,J ,K	.200 (5.08)	.290 (7.37)	.510 (12.95)	.020 (.51)
CFR06-RA105- -	1.0	50	F ,G ,J ,K	.220 (5.59)	.320 (8.13)	.510 (12.95)	.020 (.51)
CFR06-RA125- -	1.2	50	F ,G ,J ,K	.200 (5.08)	.290 (7.37)	.660 (16.76)	.020 (.51)
CFR06-RA155- -	1.5	50	F ,G ,J ,K	.220 (5.59)	.320 (8.13)	.660 (16.76)	.020 (.51)
CFR06-RA185- -	1.8	50	F ,G ,J ,K	.230 (5.84)	.320 (8.13)	.760 (19.30)	.020 (.51)
CFR06-RA205- -	2.0	50	F ,G ,J ,K	.240 (6.10)	.340 (8.64)	.760 (19.30)	.020 (.51)
CFR06-RA255- -	2.5	50	F ,G ,J ,K	.280 (7.11)	.370 (9.40)	.760 (19.30)	.020 (.51)
CFR06-RA305- -	3.0	50	F ,G ,J ,K	.310 (7.87)	.410 (10.41)	.755 (19.18)	.025 (.64)
CFR06-RA355- -	3.5	50	F ,G ,J ,K	.340 (8.64)	.430 (10.92)	.755 (19.18)	.025 (.64)
CFR06-RA405- -	4.0	50	F ,G ,J ,K	.310 (7.87)	.400 (10.16)	.925 (23.50)	.025 (.64)
CFR06-RA455- -	4.5	50	F ,G ,J ,K	.330 (8.38)	.420 (10.67)	.925 (23.50)	.025 (.64)
CFR06-RA505- -	5.0	50	F ,G ,J ,K	.250 (6.35)	.420 (10.67)	1.145 (29.08)	.025 (.64)
CFR06-RA605- -	6.0	50	F ,G ,J ,K	.280 (7.11)	.450 (11.43)	1.145 (29.08)	.025 (.64)
CFR06-RA805- -	8.0	50	F ,G ,J ,K	.340 (8.64)	.500 (12.70)	1.145 (29.08)	.025 (.64)
CFR06-RA106- -	10.0	50	F ,G ,J ,K	.390 (9.91)	.560 (14.22)	1.138 (28.91)	.032 (.81)
CFR06-RA126- -	12.0	50	F ,G ,J ,K	.430 (10.92)	.600 (15.24)	1.138 (28.91)	.032 (.81)
CFR06-RA156- -	15.0	50	F ,G ,J ,K	.490 (12.45)	.660 (16.76)	1.138 (28.91)	.032 (.81)
CFR06-RA186- -	18.0	50	F ,G ,J ,K	.470 (11.94)	.640 (16.26)	1.418 (36.02)	.032 (.81)
CFR06-RA206- -	20.0	50	F, G, J, K	.500 (12.70)	.670 (17.02)	1.418 (36.02)	.032 (.81)
CFR06-RA256- -	25.0	50	F, G, J, K	.500 (12.70)	.670 (17.02)	1.868 (47.45)	.032 (.81)
CFR06-RA306- -	30.0	50	F, G, J, K	.560 (14.22)	.730 (18.54)	1.868 (47.45)	.032 (.81)
CFR06-RA356- -	35.0	50	F, G, J, K	.590 (14.99)	.760 (19.30)	1.868 (47.45)	.032 (.81)
CFR06-RA406- -	40.0	50	F, G, J, K	.660 (16.76)	.830 (21.08)	1.868 (47.45)	.032 (.81)
CFR06-RA506- -	50.0	50	F, G, J, K	.750 (19.05)	.910 (23.11)	1.868 (47.45)	.032 (.81)
CFR06-RB102- -	.0010	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB122- -	.0012	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB152- -	.0015	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB182- -	.0018	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB222- -	.0022	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB272- -	.0027	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB332- -	.0033	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB392- -	.0039	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB472- -	.0047	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB562- -	.0056	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB682- -	.0068	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB822- -	.0082	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB103- -	.010	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB123- -	.012	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB153- -	.015	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB183- -	.018	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB223- -	.022	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB273- -	.027	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB333- -	.033	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB393- -	.039	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB473- -	.047	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.384 (9.75)	.016 (.41)
CFR06-RB563- -	.056	100	F, G, J, K	.100 (2.54)	.190 (4.83)	.384 (9.75)	.016 (.41)
CFR06-RB683- -	.068	100	F, G, J, K	.110 (2.79)	.210 (5.33)	.384 (9.75)	.016 (.41)
CFR06-RB823- -	.082	100	F, G, J, K	.090 (2.29)	.180 (4.57)	.514 (13.06)	.016 (.41)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS R - STYLE CFR06 CAPACITORS							
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions(in inches)			
				T ± .050 (1.27)	H ± .050 (1.27)	L ± .050 (1.27) -.005 (.13)	M 2/ Radial and axial
CFR06-RB104- -	.10	100	F, G, J, K	.100 (2.54)	.190 (4.83)	.514 (13.06)	.016 (.41)
CFR06-RB124- -	.12	100	F, G, J, K	.110 (2.79)	.200 (5.08)	.514 (13.06)	.016 (.41)
CFR06-RB154- -	.15	100	F, G, J, K	.120 (3.05)	.220 (5.59)	.510 (12.95)	.020 (.51)
CFR06-RB184- -	.18	100	F, G, J, K	.140 (3.56)	.230 (5.84)	.510 (12.95)	.020 (.51)
CFR06-RB224- -	.22	100	F, G, J, K	.160 (4.06)	.250 (6.35)	.510 (12.95)	.020 (.51)
CFR06-RB274- -	.27	100	F, G, J, K	.180 (4.57)	.280 (7.11)	.510 (12.95)	.020 (.51)
CFR06-RB334- -	.33	100	F, G, J, K	.200 (5.08)	.300 (7.62)	.510 (12.95)	.020 (.51)
CFR06-RB394- -	.39	100	F, G, J, K	.230 (5.84)	.320 (8.13)	.510 (12.95)	.020 (.51)
CFR06-RB474- -	.47	100	F, G, J, K	.200 (5.08)	.300 (7.62)	.660 (16.76)	.020 (.51)
CFR06-RB564- -	.56	100	F, G, J, K	.230 (5.84)	.320 (8.13)	.660 (16.76)	.020 (.51)
CFR06-RB684- -	.68	100	F, G, J, K	.230 (5.84)	.320 (8.13)	.760 (19.30)	.020 (.51)
CFR06-RB824- -	.82	100	F, G, J, K	.250 (6.35)	.350 (8.89)	.760 (19.30)	.020 (.51)
CFR06-RB105- -	1.0	100	F, G, J, K	.280 (7.11)	.380 (9.65)	.760 (19.30)	.020 (.51)
CFR06-RB125- -	1.2	100	F, G, J, K	.310 (7.87)	.410 (10.41)	.755 (19.18)	.025 (.64)
CFR06-RB155- -	1.5	100	F, G, J, K	.310 (7.87)	.400 (10.16)	.925 (23.50)	.025 (.64)
CFR06-RB185- -	1.8	100	F, G, J, K	.340 (8.64)	.430 (10.92)	.925 (23.50)	.025 (.64)
CFR06-RB205- -	2.0	100	F, G, J, K	.270 (6.86)	.440 (11.18)	1.145 (29.08)	.025 (.64)
CFR06-RB255- -	2.5	100	F, G, J, K	.310 (7.87)	.480 (12.19)	1.145 (29.08)	.025 (.64)
CFR06-RB305- -	3.0	100	F, G, J, K	.350 (8.89)	.510 (12.95)	1.138 (28.91)	.032 (.81)
CFR06-RB355- -	3.5	100	F, G, J, K	.380 (9.65)	.550 (13.97)	1.138 (28.91)	.032 (.81)
CFR06-RB405- -	4.0	100	F, G, J, K	.410 (10.41)	.580 (14.73)	1.138 (28.91)	.032 (.81)
CFR06-RB455- -	4.5	100	F, G, J, K	.440 (11.18)	.610 (15.49)	1.138 (28.91)	.032 (.81)
CFR06-RB505- -	5.0	100	F, G, J, K	.470 (11.94)	.630 (16.00)	1.138 (28.91)	.032 (.81)
CFR06-RB605- -	6.0	100	F, G, J, K	.520 (13.21)	.680 (17.27)	1.138 (28.91)	.032 (.81)
CFR06-RB805- -	8.0	100	F, G, J, K	.530 (13.46)	.690 (17.53)	1.418 (36.02)	.032 (.81)
CFR06-RB106- -	10.0	100	F, G, J, K	.540 (13.72)	.700 (17.78)	1.668 (42.37)	.032 (.81)
CFR06-RB126- -	12.0	100	F, G, J, K	.540 (13.72)	.700 (17.78)	1.868 (47.45)	.032 (.81)
CFR06-RB156- -	15.0	100	F, G, J, K	.610 (15.49)	.780 (19.81)	1.868 (47.45)	.032 (.81)
CFR06-RB186- -	18.0	100	F, G, J, K	.680 (17.27)	.840 (21.34)	1.868 (47.45)	.032 (.81)
CFR06-RB206- -	20.0	100	F, G, J, K	.720 (18.29)	.880 (22.35)	1.868 (47.45)	.032 (.81)
CHARACTERISTICS N - STYLE CFR06 CAPACITORS							
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions (in inches)			
				T ±.062 (1.57)	H ±.062 (1.57)	L ±.094 (2.39) -.062 (1.57)	M 2/ Axial and radial
CFR06-NC103- -	.010	200	G, J, K	.125 (3.18)	.187 (4.75)	.418 (10.62)	.020 (.51)
CFR06-NC123- -	.012	200	G, J, K	.140 (3.56)	.203 (5.16)	.418 (10.62)	.020 (.51)
CFR06-NC153- -	.015	200	G, J, K	.140 (3.56)	.218 (5.54)	.418 (10.62)	.020 (.51)
CFR06-NC183- -	.018	200	G, J, K	.156 (3.96)	.234 (6.94)	.418 (10.62)	.020 (.51)
CFR06-NC223- -	.022	200	G, J, K	.171 (4.34)	.250 (6.35)	.418 (10.62)	.020 (.51)
CFR06-NC273- -	.027	200	G, J, K	.187 (4.75)	.250 (6.35)	.418 (10.62)	.020 (.51)
CFR06-NC333- -	.033	200	G, J, K	.187 (4.75)	.265 (6.73)	.418 (10.62)	.020 (.51)
CFR06-NC393- -	.039	200	G, J, K	.140 (3.56)	.250 (6.35)	.542 (13.77)	.020 (.51)
CFR06-NC473- -	.047	200	G, J, K	.156 (3.96)	.265 (6.73)	.542 (13.77)	.020 (.51)
CFR06-NC563- -	.056	200	G, J, K	.171 (4.34)	.281 (7.14)	.542 (13.77)	.020 (.51)
CFR06-NC683- -	.068	200	G, J, K	.187 (4.75)	.296 (7.52)	.542 (13.77)	.020 (.51)
CFR06-NC823- -	.082	200	G, J, K	.203 (5.16)	.312 (7.92)	.542 (13.77)	.020 (.51)
CFR06-NC104- -	.10	200	G, J, K	.218 (5.54)	.328 (8.33)	.538 (13.67)	.025 (.64)
CFR06-NC124- -	.12	200	G, J, K	.250 (6.35)	.359 (9.12)	.538 (13.67)	.025 (.64)
CFR06-NC154- -	.15	200	G, J, K	.265 (6.73)	.390 (9.91)	.538 (13.67)	.025 (.64)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

CHARACTERISTICS N - STYLE CFR06 CAPACITORS							
Type designation 1/	Capacitance (nom) µF	Rated voltage (at 85°C) volts, dc	Capacitance tolerance available	Dimensions (in inches)			
				T ±.062 (1.57)	H ±.062 (1.57)	L ±.094 (2.39) -.062 (1.57)	M 2/ Axial and radial
CFR06-NC184- -	.18	200	G, J, K	.218 (5.54)	.343 (8.71)	.663 (16.84)	.025 (.64)
CFR06-NC224- -	.22	200	G, J, K	.234 (5.94)	.375 (9.53)	.663 (16.84)	.025 (.64)
CFR06-NC274- -	.27	200	G, J, K	.265 (6.73)	.421 (10.69)	.663 (16.84)	.025 (.64)
CFR06-NC334- -	.33	200	G, J, K	.281 (7.14)	.468 (11.89)	.656 (16.66)	.032 (.81)
CFR06-NC394- -	.39	200	G, J, K	.312 (7.92)	.484 (12.29)	.656 (16.66)	.032 (.81)
CFR06-NC474- -	.47	200	G, J, K	.343 (8.71)	.515 (13.08)	.656 (16.66)	.032 (.81)
CFR06-NC564- -	.56	200	G, J, K	.312 (7.92)	.484 (12.29)	.906 (23.01)	.032 (.81)
CFR06-NC684- -	.68	200	G, J, K	.328 (8.33)	.515 (13.08)	.906 (23.01)	.032 (.81)
CFR06-NC824- -	.82	200	G, J, K	.359 (9.12)	.562 (14.27)	.906 (23.01)	.032 (.81)
CFR06-NC105- -	1.0	200	G, J, K	.390 (9.91)	.578 (14.68)	.906 (23.01)	.032 (.81)
CFR06-NC125- -	1.2	200	G, J, K	.375 (9.53)	.531 (13.49)	1.218 (30.94)	.032 (.81)
CFR06-NC155- -	1.5	200	G, J, K	.406 (10.31)	.578 (14.68)	1.218 (30.94)	.032 (.81)
CFR06-NC185- -	1.8	200	G, J, K	.406 (10.31)	.656 (16.66)	1.218 (30.94)	.032 (.81)
CFR06-NC225- -	2.2	200	G, J, K	.406 (10.31)	.718 (18.24)	1.218 (30.94)	.032 (.81)
CFR06-NC335- -	3.3	200	G, J, K	.453 (11.51)	.765 (19.43)	1.468 (37.29)	.032 (.81)
CFR06-NC395- -	3.9	200	G, J, K	.500 (12.70)	.890 (22.61)	1.468 (37.29)	.032 (.81)
CFR06-NC475- -	4.7	200	G, J, K	.575 (14.61)	.906 (23.01)	1.718 (43.64)	.032 (.81)
CFR06-NC106- -	10.0	200	G, J, K	.750 (19.05)	1.203 (30.56)	1.872 (47.55)	.040 (1.02)
CFR06-NE103- -	.010	400	G, J, K	.140 (3.56)	.265 (6.73)	.688 (17.48)	.020 (.51)
CFR06-NE123- -	.023	400	G, J, K	.156 (3.96)	.281 (7.14)	.688 (17.48)	.020 (.51)
CFR06-NE153- -	.015	400	G, J, K	.171 (4.34)	.296 (7.52)	.688 (17.48)	.020 (.51)
CFR06-NE183- -	.018	400	G, J, K	.187 (4.75)	.312 (7.92)	.688 (17.48)	.020 (.51)
CFR06-NE223- -	.022	400	G, J, K	.203 (5.16)	.312 (7.92)	.688 (17.48)	.020 (.51)
CFR06-NE273- -	.027	400	G, J, K	.234 (5.94)	.343 (8.71)	.663 (16.84)	.025 (.64)
CFR06-NE333- -	.033	400	G, J, K	.250 (6.35)	.375 (9.53)	.663 (16.84)	.025 (.64)
CFR06-NE393- -	.039	400	G, J, K	.218 (5.54)	.296 (7.52)	.913 (23.19)	.025 (.64)
CFR06-NE473- -	.047	400	G, J, K	.218 (5.54)	.328 (8.33)	.913 (23.19)	.025 (.64)
CFR06-NE563- -	.056	400	G, J, K	.234 (5.94)	.375 (9.53)	.913 (23.19)	.025 (.64)
CFR06-NE683- -	.068	400	G, J, K	.234 (5.94)	.421 (10.69)	.913 (23.19)	.025 (.64)
CFR06-NE823- -	.082	400	G, J, K	.265 (6.73)	.453 (11.51)	.913 (23.19)	.025 (.64)
CFR06-NE104- -	.10	400	G, J, K	.296 (7.52)	.484 (12.29)	.906 (23.01)	.032 (.81)
CFR06-NE124- -	.12	400	G, J, K	.312 (7.92)	.531 (13.94)	.906 (23.01)	.032 (.81)
CFR06-NE154- -	.15	400	G, J, K	.343 (8.71)	.562 (14.27)	.906 (23.01)	.032 (.81)
CFR06-NE184- -	.18	400	G, J, K	.281 (7.14)	.531 (13.49)	1.218 (30.94)	.032 (.81)
CFR06-NE224- -	.22	400	G, J, K	.296 (7.52)	.562 (14.27)	1.218 (30.94)	.032 (.81)
CFR06-NE274- -	.27	400	G, J, K	.343 (8.71)	.546 (13.87)	1.468 (37.29)	.032 (.81)
CFR06-NE334- -	.33	400	G, J, K	.359 (9.12)	.593 (15.06)	1.468 (37.29)	.032 (.81)
CFR06-NE394- -	.39	400	G, J, K	.390 (9.91)	.671 (17.04)	1.468 (37.29)	.032 (.81)
CFR06-NE474- -	.47	400	G, J, K	.406 (10.31)	.718 (18.24)	1.468 (37.29)	.032 (.81)
CFR06-NE564- -	.56	400	G, J, K	.406 (10.31)	.812 (20.62)	1.468 (37.29)	.032 (.81)
CFR06-NE684- -	.68	400	G, J, K	.421 (10.69)	.890 (22.61)	1.468 (37.29)	.032 (.81)
CFR06-NE824- -	.82	400	G, J, K	.500 (12.70)	.781 (19.84)	1.718 (43.64)	.032 (.81)
CFR06-NE105- -	1.0	400	G, J, K	.515 (13.08)	.875 (22.23)	1.718 (43.64)	.032 (.81)
CFR06-NE125- -	1.2	400	G, J, K	.546 (13.87)	1.000 (25.40)	1.718 (43.64)	.032 (.81)
CFR06-NE155- -	1.5	400	G, J, K	.562 (14.27)	1.125 (28.58)	1.710 (43.43)	.040 (1.02)
CFR06-NE185- -	1.8	400	G, J, K	.671 (17.04)	1.125 (28.58)	1.710 (43.43)	.040 (1.02)
CFR06-NE225- -	2.2	400	G, J, K	.765 (19.43)	1.125 (28.58)	1.710 (43.43)	.040 (1.02)
CFR06-NE335- -	3.3	400	G, J, K	.875 (22.23)	1.406 (35.71)	1.710 (43.43)	.040 (1.02)

1/ The complete type designation will include additional symbols to indicate terminal type (for style CFR06), capacitance tolerance and product level (C, M, P, R, or S).

2/ Tolerances are ±.002 inch (0.05 mm) on .040 (No. 18 AWG) inch-diameter; +.005 inch/-.003 inch (+0.13 mm/ -0.08 mm) on .032 inch (0.81 mm) (No. 20 AWG); and .025 inch (0.64 mm) (No. 22 AWG) inch-diameters; and + .004 inch (0.10 mm) on .020 (0.51 mm) (No. 24 AWG); and .016 inch (0.41 mm) (No. 26 AWG) inch-diameters.

3/ Tolerances for dimension “D” are ±.031 inch (0.79 mm) (.250 inch-diameter (6.35 mm) and below); ±.046 inch (1.17 mm) (.251 through .499 inch-diameter (6.38 mm)); and ±.062 inch (1.57 mm) (.500 inch-diameter (12.7 mm) and above).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

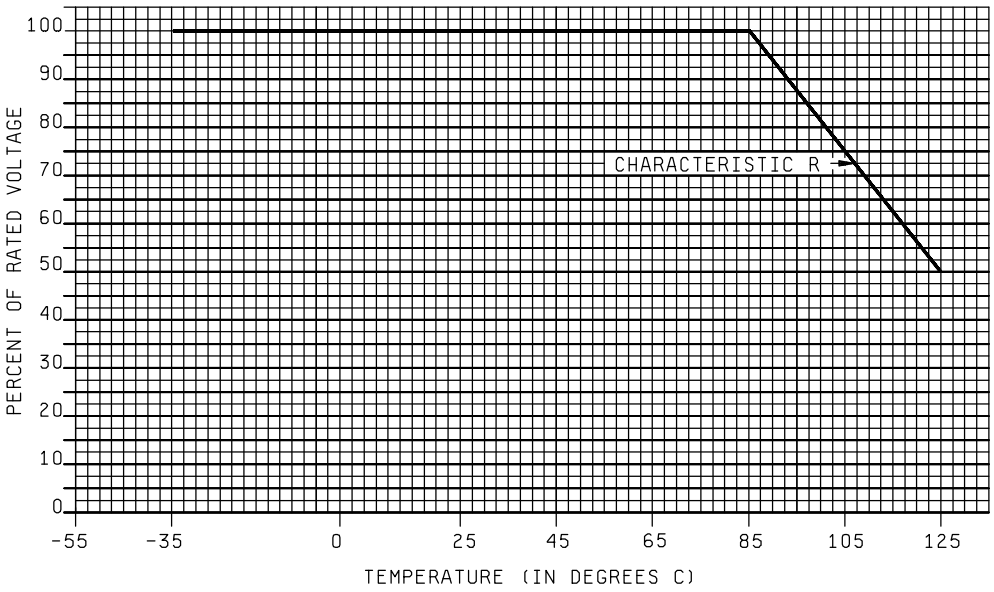


FIGURE 3. Voltage derating with temperature.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and figure 2 and table I.

Terminals: Axial wire-lead (A) or radial wire-lead (R), as shown in table I.

Characteristic: N or R as shown in table I.

Rated voltage: 50 V (A), 100 V (B), 200 V (C), or 400 V (E), as shown in table I. When properly voltage derated (see figure 3), characteristic R capacitors will operate to 125°C.

Capacitance (nom): See table I.

Capacitance tolerance: ±1 percent (F), ±2 percent (G), ±5 percent (J), ±10 percent (K), as shown in table I.

Product level: Non-established reliability - C; Established reliability - M, P, R, or S.

Vibration, high frequency (direction and duration of motion, R-type terminals): Three mutually perpendicular directions, perpendicular to the width, length, and thickness; 3 hours in each direction.

Burn-in:

Characteristic N: DC only, with 140 percent of +85°C dc rated voltage as specified in table III of MIL-PRF-55514, applied for 48 hours minimum, at +85°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

Characteristic R: DC only, with 140 percent of +125°C dc rated voltage as specified in table III of MIL-PRF-55514, applied for 48 hours minimum, at +125°C.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, MC, OS
Air Force - 17, 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-2022)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.