
MILITARY SPECIFICATION SHEET

JACKS, TELEPHONE

TYPES JJ-015 AND JJ-019


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of specification MIL-J-641

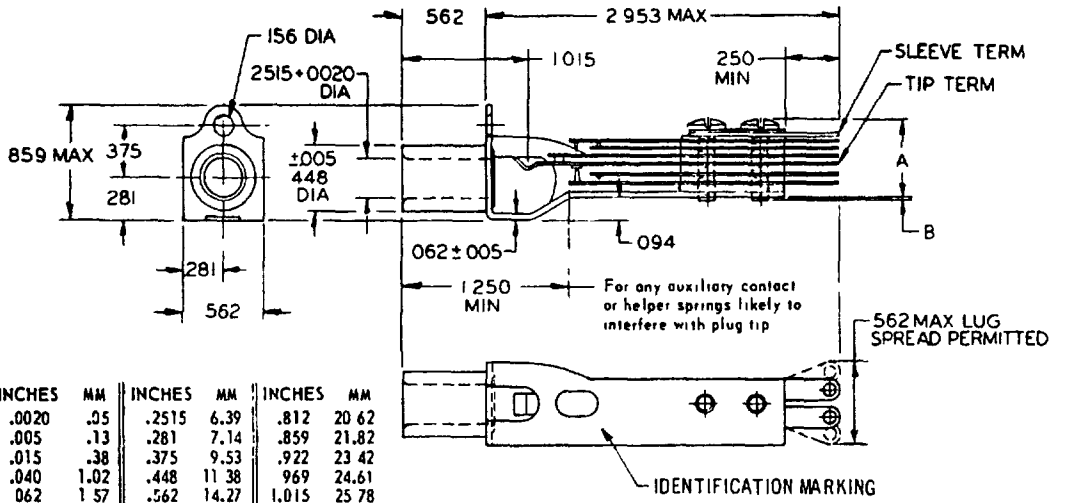


INCHES	MM	INCHES	MM	INCHES	MM
.0020	.05	.2515	6.39	.812	20 62
.005	.13	.281	7.14	.859	21.82
.015	.38	.375	9.53	.922	23 42
.040	1.02	.448	11 38	969	24.61
062	1 57	.562	14.27	1.015	25 78
.094	2.39	625	15.88	1 250	31 75
.156	3.96	.750	19 05	2.953	75.01
.250	6.35				

NOTES
1 Dimensions are in inches Unless otherwise specified, tolerance on dimensions is ± 015 inch
2 Metric equivalents (to the nearest .01 mm) are given for general information only, and are based upon 1 inch = 25 4 mm
3 Multiple mounting Jacks may be multiple mounted on a panel in accordance with the minimum center-to center dimensions specified in Table 1.
4 Arrangement of contact spring lifters is optional



Schematic J1-1A-1C
JJ-015



Schematic J8-1D
JJ 019

Type	A max	B max	Center-to-center dimensions for multiple mounting on panel: In direction of pileup (min)	Center-to-center dimensions for multiple mounting on panel: At right angle to pileup (min)
JJ 015	750	.062	.922	.625
JJ 019	.688	.040	969	

Table 1

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS·

Dimensions and configuration: See figure.

Insertion and withdrawal forces The insertion and withdrawal forces shall be as follows

Insertion force - - - - - - - - - 7 pounds (maximum).

Withdrawal force - - - - - - - - 1.5 pounds (minimum),
7 pounds (maximum).

Test plug TP55, conforming to MIL-J-641, shall be used.

Spring life· Test plug TP55, conforming to MIL-J-641, shall be used.

Frame strength: Frame strength test is applicable.

Terminal of tip contact spring shall be on left side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame.

Cutout in jack frame shall be positioned so that a minimum of .016 inch clearance exists between the tip of the TP55 plug and the edge of the frame cutout at all times during insertion of the plug.

Ground terminal shall be placed on top of pileup, as shown in schematic.

Part number M641/1- (dash number from table III).

TABLE II. Types of telephone jacks.

Part number	Type designation	Connection	Mounting	Switching action upon insertion of plug 1/
1	JJ-015	Tip and sleeve	Single lug	One break-make, one make
2	JJ-019			Two make-break

1/ The hyphen indicates sequence.

Qualification of either the JJ-015 or the JJ-019 will qualify both types.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities·
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities
Army - MU, MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17, 19

Preparing activity·
Army - EL

Agent
DSA - ES

(Project 5935-1854-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION JACKS, TELEPHONE TYPES JJ-015 AND JJ-019

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity Optional)*

DATE

DD, FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ED
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:00Z
Check the source to verify that this is the current version before use.