MIL-J-641/3D
3 July 1973
SUPERSEDING
MIL-J-641/3C
3 April 1968


MILITARY SPECIFICATION SHEET

JACKS, TELEPHONE

TYPES JJ-022, JJ-042, JJ-073, JJ-074, JJ-075, JJ-077, AND JJ-078

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of specification MIL-J-641.

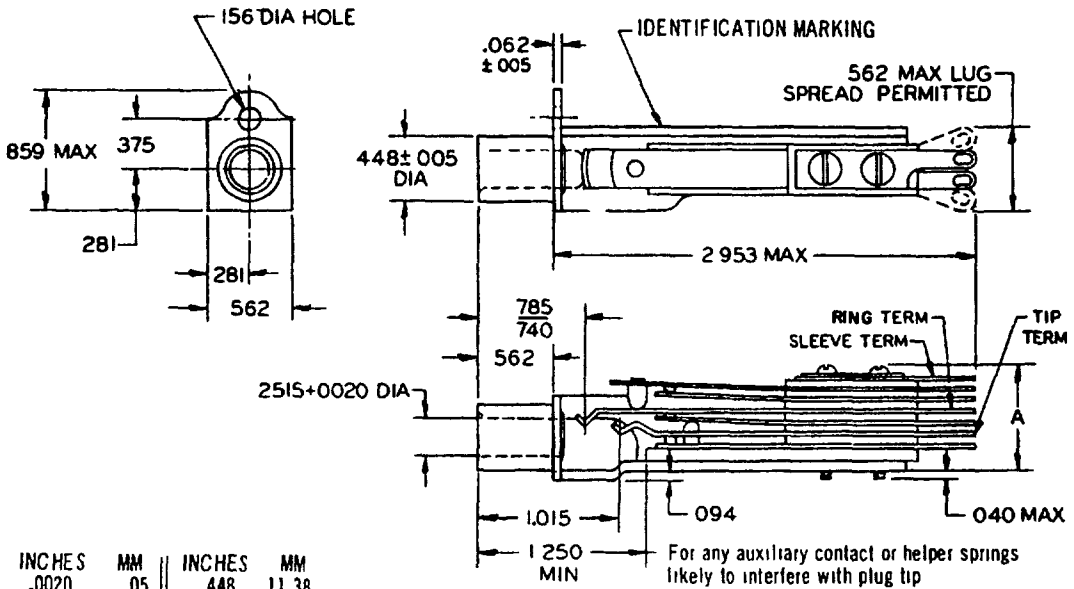


INCHES	MM	INCHES	MM
.0020	.05	.448	11.38
.005	.13	.562	14.27
.015	.38	.740	18.80
.040	1.02	.750	19.05
.062	1.57	.785	19.94
.094	2.39	.859	21.82
.156	3.96	1.015	25.78
.2515	6.39	1.250	31.75
.281	7.14	2.953	75.01
.375	9.53		

		Center-to-center dimensions for multiple mounting on panel	
Type	Dimension A (max)	In direction of pileup (min)	At right angle to pileup (min)
JJ-022	.562	.719	.922
JJ-042	.562	.781	
JJ-073	.750	.906	
JJ-074	.750	.906	
JJ-075	.750	.906	
JJ-077	.844	1.000	
JJ-078	.984	1.125	


Table I

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.




Schematic J2
JJ-022




Schematic J7
JJ-042




Schematic J7-1A
JJ-073




Schematic J2-1A
JJ-074



Schematic J7-1B
JJ-075



Schematic J2-2A
JJ-077



Schematic J10-2A-1B
JJ-078

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerance is ±.015 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Multiple mounting: Jacks may be multiple-mounted on a panel in accordance with the minimum center-to-center dimensions specified in table I.
4. Arrangement of contact spring lifters is optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:

Insertion force	7 pounds (maximum).
Withdrawal force	1.5 pounds (minimum), 7 pounds (maximum).

Test plug TP51, conforming to MIL-J-641, shall be used.

Spring life: Test plug TP51, conforming to MIL-J-641, shall be used.

Frame strength: Frame strength test is applicable.

Terminal of tip contact spring shall be on left side when terminals are viewed from the rear, with the jack in a position such that the contact spring pileup is on top of the jack frame.

Cutout in jack frame shall be positioned so that a minimum of .016 inch clearance exists between the tip of the TP51 plug and the edge of the frame cutout at all times during insertion of the plug.

Ground terminal shall be placed on top of pileup, as shown in schematic.

Part number: M641/3- (dash number from table II).

TABLE II. Types of telephone jacks.

Dash no.	Type designation	Connection	Mounting	Switching action upon insertion of plug
1	JJ-022	Tip, ring, and sleeve	Single lug	None
2	JJ-042			Two breaks
3	JJ-073			Two breaks, one make
4	JJ-074			One make
5	JJ-075			Three breaks
6	JJ-077			Two makes
7	JJ-078			Two breaks, two makes

TABLE III. Group qualification.

Submission and qualification of following types	Qualifies the following types
JJ-078	JJ-022, JJ-042, JJ-073, JJ-074, JJ-075, JJ-077, JJ-078
JJ-073 or JJ-075	JJ-022, JJ-042, JJ-073, JJ-074, JJ-075, JJ-077
JJ-042 or JJ-077	JJ-022, JJ-042, JJ-074, JJ-077
JJ-074	JJ-022, JJ-074
JJ-022	JJ-022

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - MU, MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17, 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1854-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-J-641/3D JACKS TELEPHONE TYPES JJ-022, JJ-042, JJ-074, JJ-075, JJ-077, AND JJ-078

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 65 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-RD-ED
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:01Z
Check the source to verify that this is the current version before use.