MIL-J-641/9D
3 July 1973
SUPERSEDING
MIL-J-641/9C
3 April 1968


MILITARY SPECIFICATION SHEET

JACKS, TELEPHONE,


TYPES JJ-079, JJ-081, JJ-082, AND JJ-106

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the jacks described herein shall consist of this document and the latest issue of specification MIL-J-641.

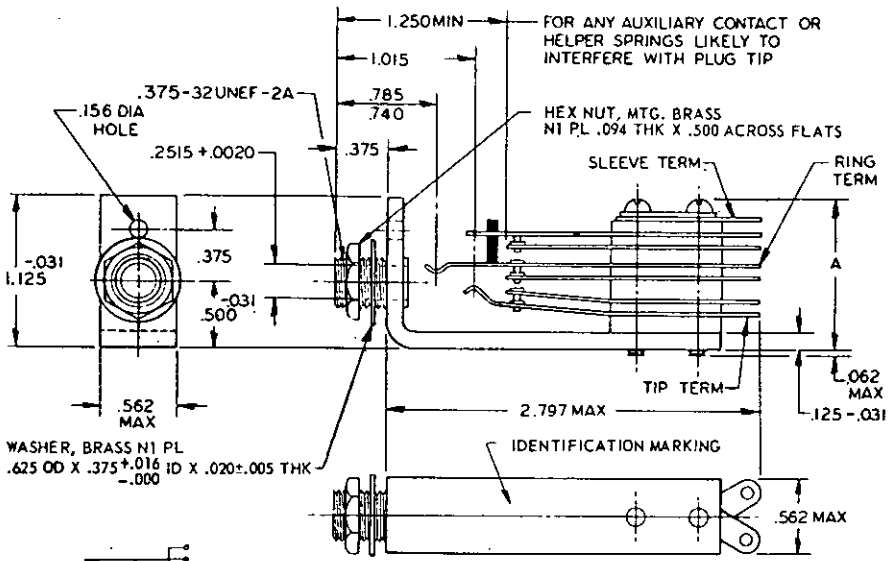

INCHES	MM
.002	.05
.005	.13
.015	.38
.016	.41
.020	.51
.031	.79
.062	1.57
.094	2.39
.125	3.18
.156	3.96
.2515	6.39
.375	9.53
.500	12.70
.562	14.27
.625	15.88
.688	17.48
.740	18.80
.785	19.94
.875	22.23
.938	23.83
1.015	25.78
1.125	28.58
1.188	30.18
1.250	31.75
1.375	34.93
2.797	71.04

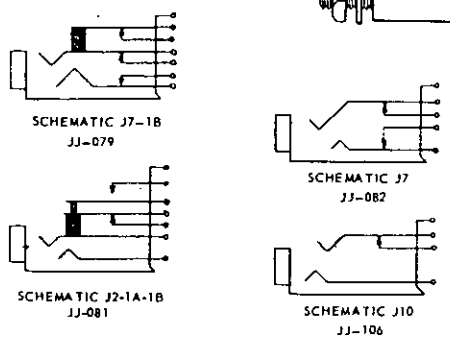

		Center-to-center dimensions for multiple mounting on panel.	
Type	Dimension A (max)	In direction of pileup (min)	At right angle to pileup (min)
JJ-079	1.125	1.250	.688
JJ-081	1.250	1.375	
JJ-082	.938	1.188	
JJ-106	.875	1.250	

Table I.

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerance on dimensions is ±.015 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Multiple mounting: Jacks may be multiple-mounted on a panel in accordance with the minimum center-to-center dimensions specified in table I.
4. Arrangement of contact spring lifters is optional.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insertion and withdrawal forces: The insertion and withdrawal forces shall be as follows:

Insertion force	7 pounds (maximum).
Withdrawal force	1.5 pounds (minimum); 7 pounds (maximum).

Test plug TP51, conforming to MIL-J-641, shall be used.

Spring life: Test plug TP51, conforming to MIL-J-641, shall be used.

Ground terminal shall be placed on top of pileup, as shown in schematic.

Part number: M641/9- (dash number from table II).

TABLE II. Types of telephone jacks.

Dash no.	Type	Connection	Mounting	Switching action upon insertion of plug
1	JJ-079	Tip, ring, and sleeve	Single lug or bushing	Three breaks
2	JJ-081			One break, one make
3	JJ-082			Two breaks
4	JJ-106			One break

TABLE III. Group qualification.

Submission and qualification of following types:	Qualifies the following types:
JJ-079 or JJ-081	JJ-079, JJ-081, JJ-082, JJ-106
JJ-082	JJ-082, JJ-106
JJ-106	JJ-106

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, ME, SL, MU
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - MU, MI, WC, AV
Navy - OS, MC, SH, YD
Air Force - 17, 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1854-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T11:02Z
Check the source to verify that this is the current version before use.