INCH-POUND

MIL-C-11272/13C
4 February 2008
SUPERSEDING
MIL-C-11272/13B
7 February 2003


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC
STYLE CY06

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-11272.

* INACTIVE FOR DESIGN AFTER 7 JAN 1970.
USE MIL-PRF-23269/10, Style CYR51.

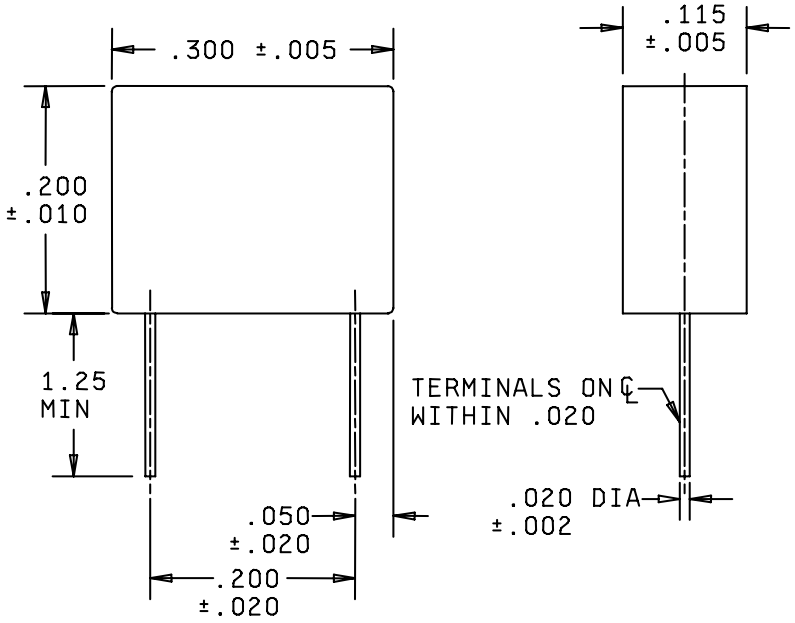


| Inches | mm |
|---|---|
| .002 | 0.05 |
| .005 | 0.13 |
| .010 | 0.25 |
| .020 | 0.51 |
| .050 | 1.27 |
| .115 | 2.92 |
| .200 | 5.08 |
| .300 | 7.62 |
| 1.25 | 31.75 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style CY06 capacitors



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Requirements: Requirements shall be in accordance with MIL-C-11272, and as specified herein.

* Dimensions and configuration: See figure 1.

Dielectric: Glass.

Case: Epoxy.

* Terminals: Solderable

Capacitance: See table I.

Capacitance tolerance: C = ± 0.25pF; D = ± 0.50pF; F = ±1%; G = ±2%; J = ±5%.

DC rated voltage: 300 volts.

Dissipation factor:

Not to exceed 0.002 for capacitance values of 1 to 100 pF.
Not to exceed 0.001 for capacitance values greater than 100 pF.

* Quality factor (Q): In accordance with MIL-C-11272 and the following:

Not less than 500 for capacitance values of 1 to 100 pF.
Not less than 2,000 for capacitance values greater than 100 pF.

* Immersion: In accordance with MIL-C-11272 and the following:

Dissipation factor: Not to exceed 0.002 for capacitance values of 1 to 100 pF.
Not to exceed 0.001 for capacitance values greater than 100 pF.

* Moisture resistance: In accordance with MIL-C-11272 and the following:

Dissipation factor: Not to exceed 0.003 for capacitance values of 100 pF or less;
Not to exceed 0.001 for capacitance values greater than 100 pF.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Style CY06.

| PIN 1/ | Capacitance | DC rated voltage | Capacitance tolerances available | PIN 1/ | Capacitance | DC rated voltage | Capacitance tolerances available |
|---|---|---|---|---|---|---|---|
| | pF | volts | | | pF | volts | |
| CY06C1R0C | 1.0 | 300 | C | CY06C360- | 36 | 300 | FGJ |
| CY06C1R5C | 1.5 | 300 | C | CY06C390- | 39 | 300 | FGJ |
| CY06C2R2- | 2.2 | 300 | CD | CY06C430- | 43 | 300 | FGJ |
| CY06C2R7C | 2.7 | 300 | C | CY06C470- | 47 | 300 | FGJ |
| CY06C3R0- | 3.0 | 300 | CD | CY06C510- | 51 | 300 | FGJ |
| CY06C3R3C | 3.3 | 300 | C | CY06C560- | 56 | 300 | FGJ |
| CY06C3R6- | 3.6 | 300 | CD | CY06C620- | 62 | 300 | FGJ |
| CY06C3R9C | 3.9 | 300 | C | CY06C680- | 68 | 300 | FGJ |
| CY06C4R3- | 4.3 | 300 | CD | CY06C750- | 75 | 300 | FGJ |
| CY06C4R7C | 4.7 | 300 | C | CY06C820- | 82 | 300 | FGJ |
| CY06C5R1- | 5.1 | 300 | CJ | CY06C910- | 91 | 300 | FGJ |
| CY06C5R6- | 5.6 | 300 | CJ | CY06C101- | 100 | 300 | FGJ |
| CY06C6R2- | 6.2 | 300 | CJ | CY06C111- | 110 | 300 | FGJ |
| CY06C6R8- | 6.8 | 300 | CJ | CY06C121- | 120 | 300 | FGJ |
| CY06C7R5- | 7.5 | 300 | CJ | CY06C131- | 130 | 300 | FGJ |
| CY06C8R2- | 8.2 | 300 | CJ | CY06C151- | 150 | 300 | FGJ |
| CY06C9R1- | 9.1 | 300 | CJ | CY06C161- | 160 | 300 | FGJ |
| CY06C100- | 10 | 300 | CJ | CY06C181- | 180 | 300 | FGJ |
| CY06C110- | 11 | 300 | CJ | CY06C201- | 200 | 300 | FGJ |
| CY06C120- | 12 | 300 | CJ | CY06C221- | 220 | 300 | FGJ |
| CY06C130- | 13 | 300 | CGJ | CY06C241- | 240 | 300 | FGJ |
| CY06C150- | 15 | 300 | CGJ | CY06C271- | 270 | 300 | FGJ |
| CY06C160- | 16 | 300 | CGJ | CY06C301- | 300 | 300 | FGJ |
| CY06C180- | 18 | 300 | CGJ | CY06C331- | 330 | 300 | FGJ |
| CY06C200- | 20 | 300 | CGJ | CY06C361- | 360 | 300 | FGJ |
| CY06C220- | 22 | 300 | CGJ | CY06C391- | 390 | 300 | FGJ |
| CY06C240- | 24 | 300 | CGJ | CY06C431- | 430 | 300 | FGJ |
| CY06C270- | 27 | 300 | FGJ | CY06C471- | 470 | 300 | FGJ |
| CY06C300- | 30 | 300 | FGJ | CY06C511- | 510 | 300 | FGJ |
| CY06C330- | 33 | 300 | FGJ | CY06C561- | 560 | 300 | FGJ |

1/ Complete PIN will include an additional letter symbol to indicate capacitance tolerance, where applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

* Life: In accordance with MIL-C-11272 and the following:

For qualification and group B continuation tests:

At 25°C:

Insulation resistance: Not less than 100,000 megohms.

Capacitance: Change not more than 0.5 percent of nominal value or 0.5 pF whichever is greater, from initial 25°C value.

Dissipation factor: Not to exceed 0.0045 for values of 100 pF, or less;
Not to exceed 0.0025 for values greater than 100 pF

At 125°C:

Insulation resistance: Not less than 10,000 megohms.

Capacitance: Change not more than 0.5 percent of nominal value or 0.5 pF whichever is greater, from initial 125°C value.

Dissipation factor: Not to exceed 0.009 for values of 100 pF, or less;
Not to exceed 0.007 for values greater than 100 pF.

For performance check:

Insulation resistance: Not less than 100,000 megohms.

Capacitance: Change not more than 0.5 percent of nominal value or 0.5 pF whichever is greater, from initial 25°C value.

Dissipation factor: Not to exceed 0.0045 for values of 100 pF or less;
Not to exceed 0.0025 for values greater than 100 pF.

Temperature coefficient and capacitance drift: The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. Temperature coefficient and capacitance drift.

| Temperature coefficient | Capacitance drift (-55° to +125°C) |
|---|---|
| parts/million/°C<br>140 ±25 | 0.1 percent or 0.1 pF, whichever is greater. |

* Referenced documents. In addition to MIL-C-11272, this document also references the following:

MIL-PRF-23269/10

* Changes from previous issue. The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2008-005)

Review activity:
Air Force - 19, 99

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:51Z
Check the source to verify that this is the current version before use.