MIL-C-11272/1C
7 January 1970
SUPERSEDING
MIL-C-11272/1B
10 August 1960

MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY10

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY10, axial-lead, glass-dielectric, fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)


3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 Design and construction. Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

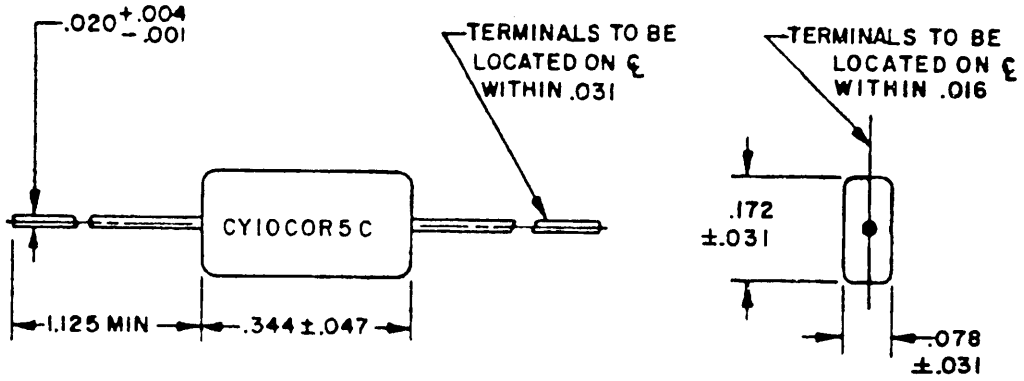

INCHES	MM
.001	.03
.004	.10
.016	.41
.020	.51
.031	.79
.047	1.19
.078	1.98
.172	4.37
.344	8.74
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Style CY10 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY10.*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available	Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*		*pF*	*volts*	*(±)*
CY10C0R5C	0.5	500	C	CY10C240-	24	500	GJ
CY10C1R0C	1.0	500	C	CY10C270-	27	500	FGJ
CY10C1R5C	1.5	500	C	CY10C300-	30	500	FGJ
CY10C2R2-	2.2	500	CD	CY10C330-	33	500	FGJ
CY10C2R7C	2.7	500	C	CY10C360-	36	500	FGJ
CY10C3R0-	3.0	500	CD	CY10C390-	39	500	FGJ
CY10C3R3C	3.3	500	C	CY10C430-	43	500	FGJ
CY10C3R6-	3.6	500	CD	CY10C470-	47	500	FGJ
CY10C3R9C	3.9	500	C	CY10C510-	51	500	FGJ
CY10C4R3-	4.3	500	CD	CY10C560-	56	500	FGJ
CY10C4R7C	4.7	500	C	CY10C620-	62	500	FGJ
CY10C5R1C	5.1	500	C	CY10C680-	68	500	FGJ
CY10C5R6-	5.6	500	CJ	CY10C750-	75	500	FGJ
CY10C6R2-	6.2	500	CJ	CY10C820-	82	500	FGJ
CY10C6R8-	6.8	500	CJ	CY10C910-	91	500	FGJ
CY10C7R5-	7.5	500	CJ	CY10C101-	100	500	FGJ
CY10C8R2-	8.2	500	CJ	CY10C111-	110	500	FGJ
CY10C9R1-	9.1	500	CJ	CY10C121-	120	500	FGJ
CY10C100-	10	500	CJ	CY10C131-	130	500	FGJ
CY10C110-	11	500	CJ	CY10C151-	150	500	FGJ
CY10C120-	12	500	CJ	CY10C161-	160	500	FGJ
CY10C130-	13	500	GJ	CY10C181-	180	500	FGJ
CY10C150-	15	500	GJ	CY10C201-	200	500	FGJ
CY10C160-	16	500	GJ	CY10C221-	220	300	FGJ
CY10C180-	18	500	GJ	CY10C241-	240	300	FGJ
CY10C200-	20	500	GJ	CY10C271-	270	300	FGJ
CY10C220-	22	500	GJ	CY10C301-	300	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance, where applicable.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
  (3) Dissipation factor – Shall not exceed 0.0025.

(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial 125°C value.
  (3) Dissipation factor – Shall not exceed 0.007.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

3.3.2 *For quality conformance inspection.*

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms, minimum.
(b) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
(c) Dissipation factor – Shall not exceed 0.0025.

3.4 Temperature coefficient and capacitance drift. The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 140 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.