MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY15

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY15, axial-lead, glass-dielectric, fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Diclectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 **Design and construction.** Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

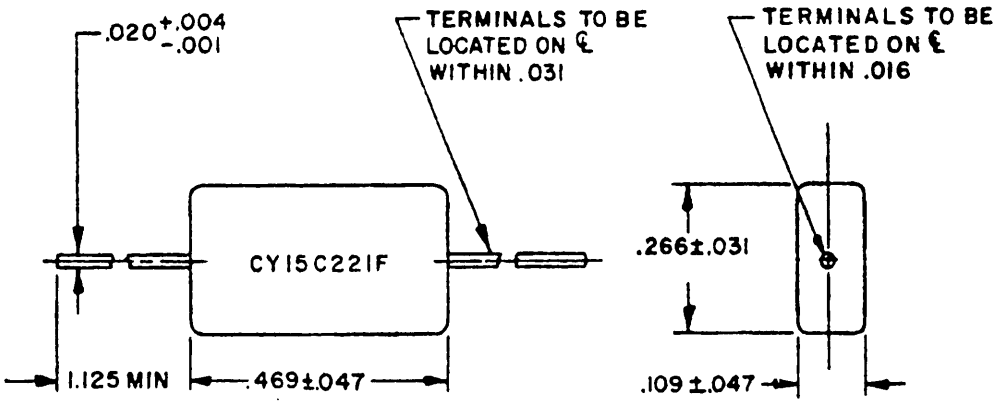

INCHES	MM
.001	.03
.004	.10
.016	.41
.020	.51
.031	.79
.047	1.19
.109	2.77
.266	6.76
.469	11.91
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Style CY15 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY15*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*
CY15C221-	220	500	FGJ
CY15C241-	240	500	FGJ
CY15C271-	270	500	FGJ
CY15C301-	300	500	FGJ
CY15C331-	330	500	FGJ
CY15C361-	360	500	FGJ
CY15C391-	390	500	FGJ
CY15C431-	430	500	FGJ
CY15C471-	470	500	FGJ
CY15C511-	510	500	FGJ
CY15C561-	560	300	FGJ
CY15C621-	620	300	FGJ
CY15C681-	680	300	FGJ
CY15C751-	750	300	FGJ
CY15C821-	820	300	FGJ
CY15C911-	910	300	FGJ
CY15C102-	1,000	300	FGJ
CY15C112-	1,100	300	FGJ
CY15C122-	1,200	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
  (3) Dissipation factor – Shall not exceed 0.0025.

(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial 125°C value.
  (3) Dissipation factor – Shall not exceed 0.007.

3.3.2 *For quality conformance inspection.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms, minimum.
(b) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
(c) Dissipation factor – Shall not exceed 0.0025.

3.4 Temperature coefficient and capacitance drift. The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 140 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:49Z
Check the source to verify that this is the current version before use.