MIL-C-11272/3B
7 January 1970
SUPERSEDING
MIL-C-11272/3A
10 August 1960

MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY20

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY20, axial-lead, glass-dielectric, fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 **Design and construction.** Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

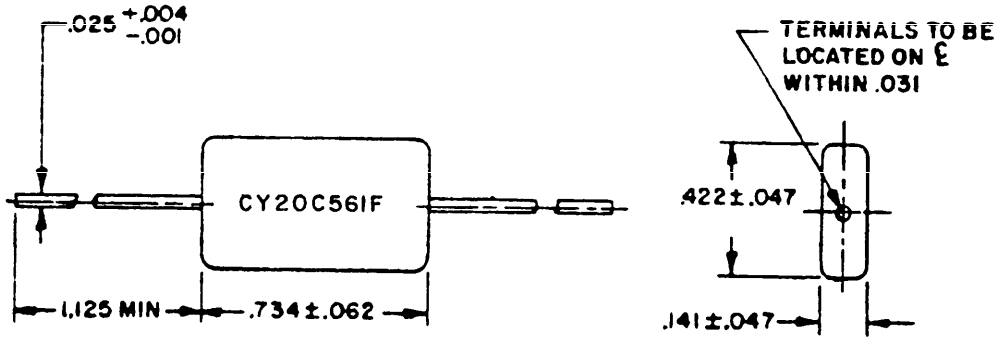

INCHES	MM
.001	.03
.004	.10
.025	.64
.031	.79
.047	1.19
.062	1.57
.141	3.58
.422	10.72
.734	18.64
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Style CY20 capacitors.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY20.*

Type designation[1/]	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*
CY20C561-	560	500	FGJ
CY20C621-	620	500	FGJ
CY20C681-	680	500	FGJ
CY20C751-	750	500	FGJ
CY20C821-	820	500	FGJ
CY20C911-	910	500	FGJ
CY20C102-	1,000	500	FGJ
CY20C112-	1,100	500	FGJ
CY20C122-	1,200	500	FGJ
CY20C132-	1,300	500	FGJ
CY20C152-	1,500	500	FGJ
CY20C162-	1,600	500	FGJ
CY20C182-	1,800	500	FGJ
CY20C202-	2,000	500	FGJ
CY20C222-	2,200	500	FGJ
CY20C242-	2,400	500	FGJ
CY20C272-	2,700	500	FGJ
CY20C302-	3,000	500	FGJ
CY20C332-	3,300	500	FGJ
CY20C362-	3,600	300	FGJ
CY20C392-	3,900	300	FGJ
CY20C432-	4,300	300	FGJ
CY20C472-	4,700	300	FGJ
CY20C512-	5,100	300	FGJ

[1/] Complete type designation will include an additional letter symbol to indicate capacitance tolerance.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
  (3) Dissipation factor – Shall not exceed 0.0025.

(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial 125°C value.
  (3) Dissipation factor – Shall not exceed 0.007.

3.3.2 *For quality conformance inspection.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms, minimum.
(b) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
(c) Dissipation factor – Shall not exceed 0.0025.

3.4 Temperature coefficient and capacitance drift. The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 140 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.