MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY30

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY30, axial-lead, glass-dielectric, fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 Design and construction. Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

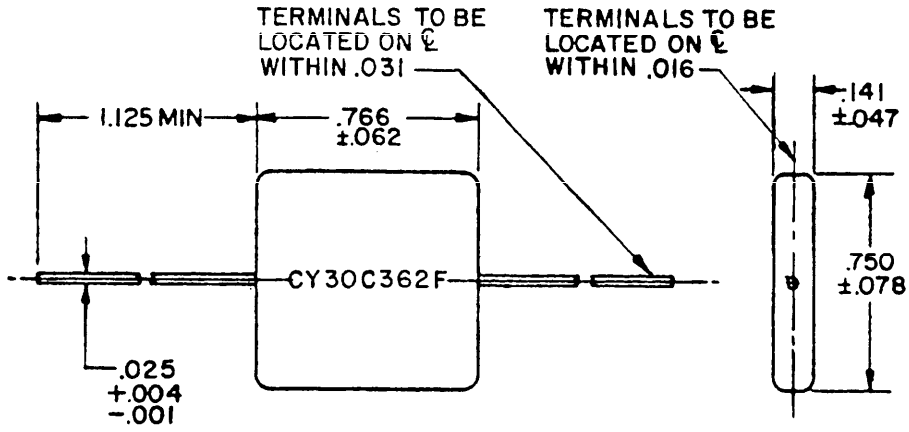

INCHES	MM
.001	.03
.004	.10
.025	.64
.031	.79
.047	1.19
.062	1.57
.078	1.98
.141	3.58
.750	19.05
.766	19.46
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Style CY30 capacitors.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY30.*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*
CY30C362-	3,600	500	FGJ
CY30C392-	3,900	500	FGJ
CY30C432-	4,300	500	FGJ
CY30C472-	4,700	500	FGJ
CY30C512-	5,100	500	FGJ
CY30C562-	5,600	500	FGJ
CY30C622-	6,200	500	FGJ
CY30C682-	6,800	300	FGJ
CY30C752-	7,500	300	FGJ
CY30C822-	8,200	300	FGJ
CY30C912-	9,100	300	FGJ
CY30C103-	10,000	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
  (3) Dissipation factor – Shall not exceed 0.0025.

(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms, minimum.
  (2) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial 125°C value.
  (3) Dissipation factor – Shall not exceed 0.007.

3.3.2 *For quality conformance inspection.*

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms, minimum.
(b) Capacitance – Change not more than 0.5 percent of the nominal value or 0.5 pF, whichever is greater, from the initial value.
(c) Dissipation factor – Shall not exceed 0.0025.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

3.4 Temperature coefficient and capacitance drift. The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 140 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.