MIL-C-11272/5B
7 January 1970
SUPERSEDING
MIL-C-11272/5A
23 February 1961

MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY12

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY12, axial-radial lead, glass-dielectric (vitreous enamel), fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 **Design and construction.** Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

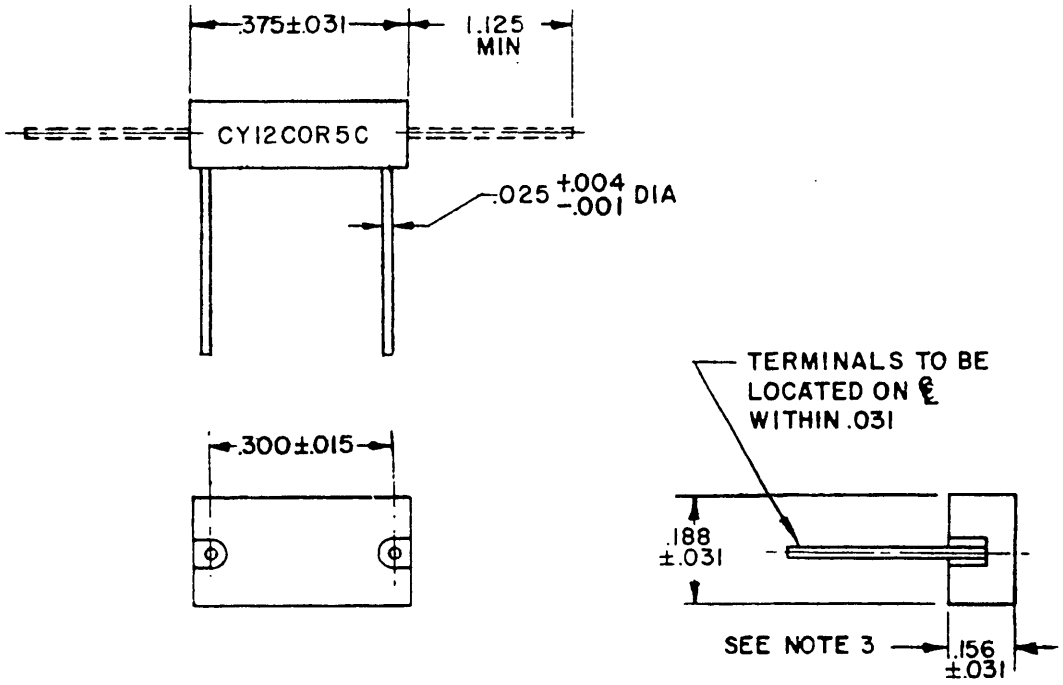

INCHES	MM	INCHES	MM
.001	.03	.188	4.78
.004	.10	.219	5.56
.015	.38	.300	7.62
.025	.64	.375	9.53
.031	.79	1.125	28.58
.156	3.96		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. For any value above 130 pF, this dimension shall be .219 ±.031.

Style CY12 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY12.*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available	Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*		*pF*	*volts*	*(±)*
CY12C0R5C	0.5	500	C	CY12C240-	24	500	GJ
CY12C1R0C	1.0	500	C	CY12C270-	27	500	FGJ
CY12C1R5C	1.5	500	C	CY12C300-	30	500	FGJ
CY12C2R2-	2.2	500	CD	CY12C330-	33	500	FGJ
CY12C2R7C	2.7	500	C	CY12C360-	36	500	FGJ
CY12C3R0-	3.0	500	CD	CY12C390-	39	500	FGJ
CY12C3R3C	3.3	500	C	CY12C430-	43	500	FGJ
CY12C3R6-	3.6	500	CD	CY12C470-	47	500	FGJ
CY12C3R9C	3.9	500	C	CY12C510-	51	500	FGJ
CY12C4R3-	4.3	500	CD	CY12C560-	56	500	FGJ
CY12C4R7C	4.7	500	C	CY12C620-	62	500	FGJ
CY12C5R1C	5.1	500	C	CY12C680-	68	500	FGJ
CY12C5R6-	5.6	500	CJ	CY12C750-	75	500	FGJ
CY12C6R2-	6.2	500	CJ	CY12C820-	82	500	FGJ
CY12C6R8-	6.8	500	CJ	CY12C910-	91	500	FGJ
CY12C7R5-	7.5	500	CJ	CY12C101-	100	500	FGJ
CY12C8R2-	8.2	500	CJ	CY12C111-	110	500	FGJ
CY12C9R1-	9.1	500	CJ	CY12C121-	120	500	FGJ
CY12C100-	10	500	CJ	CY12C131-	130	500	FGJ
CY12C110-	11	500	CJ	CY12C151-	150	500	FGJ
CY12C120-	12	500	CJ	CY12C161-	160	500	FGJ
CY12C130-	13	500	GJ	CY12C181-	180	500	FGJ
CY12C150-	15	500	GJ	CY12C201-	200	500	FGJ
CY12C160-	16	500	GJ	CY12C221-	220	300	FGJ
CY12C180-	18	500	GJ	CY12C241-	240	300	FGJ
CY12C200-	20	500	GJ	CY12C271-	270	300	FGJ
CY12C220-	22	500	GJ	CY12C301-	300	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance, where applicable.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.002.

(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms or 10 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.003.

3.3.2 *For quality conformance inspection.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
(b) Dissipation factor – Shall not exceed 0.002.

3.4 **Quality factor (Q).** The Q shall be not less than 2,000.

3.5 **Temperature coefficient and capacitance drift.** The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 105 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 **Notes.** In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.