MILITARY SPECIFICATION

CAPACITORS, FIXED, GLASS DIELECTRIC,

STYLE CY16

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION. USE MIL-C-23269.

1. SCOPE

1.1 This specification covers the detail requirements for style CY16, axial-radial lead, glass-dielectric (vitreous enamel), fixed capacitors.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-11272 Capacitors, Fixed, Glass Dielectric, General Specification for.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-C-11272, and as specified herein.

3.2 Design and construction. Capacitors shall be of the design, construction, and physical dimensions specified on figure and in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:50Z
Check the source to verify that this is the current version before use.

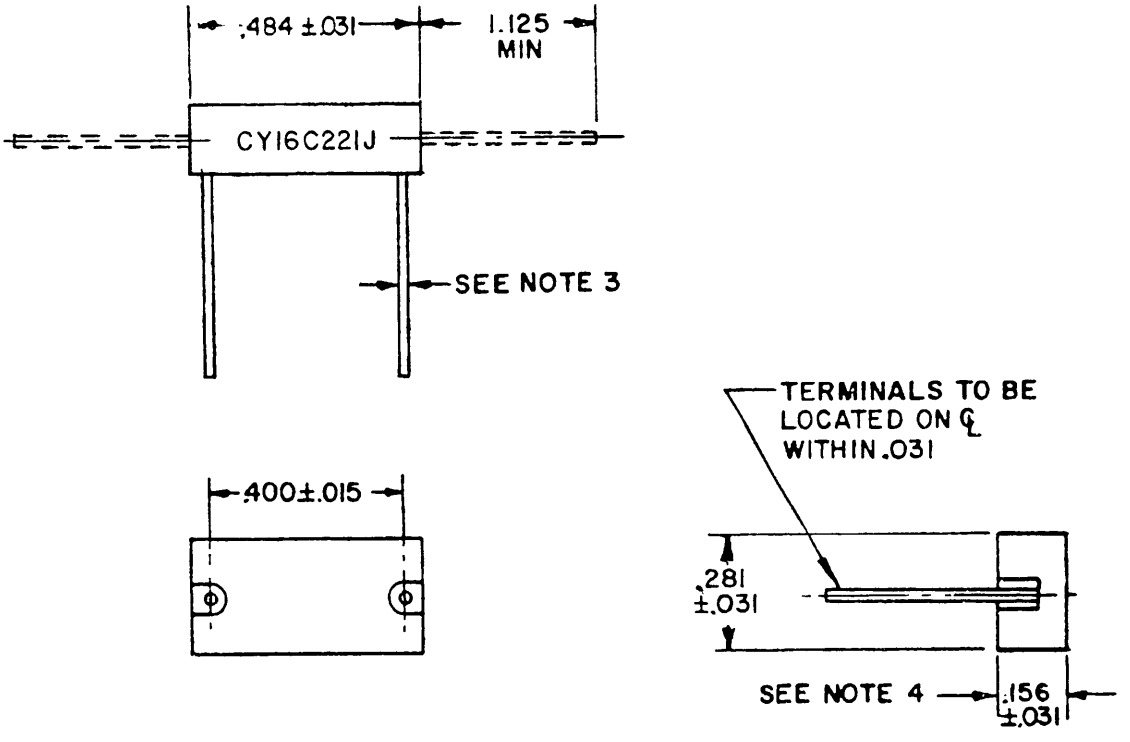

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.032	.81	.400	10.16
.004	.10	.062	1.57	.484	12.29
.015	.38	.156	3.96	1.125	28.58
.025	.64	.219	5.56		
.031	.79	.281	7.14		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The lead diameter shall be $.025 \pm^{.004}_{.001}$ for capacitance values less than 330 pF and $.032 \pm^{.004}_{.001}$ for capacitance values above 300 pF.
4. For any value above 300 pF, this dimension shall be $.219 \pm^{.062}_{.031}$.

Style CY16 capacitors.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. *Style CY16.*

Type designation 1/	Capacitance	DC rated voltage	Capacitance tolerances available
	pF	*volts*	*(±)*
CY16C221-	220	500	FGJ
CY16C241-	240	500	FGJ
CY16C271-	270	500	FGJ
CY16C301-	300	500	FGJ
CY16C331-	330	500	FGJ
CY16C361-	360	500	FGJ
CY16C391-	390	500	FGJ
CY16C431-	430	500	FGJ
CY16C471-	470	500	FGJ
CY16C511-	510	300	FGJ
CY16C561-	560	300	FGJ
CY16C621-	620	300	FGJ
CY16C681-	680	300	FGJ
CY16C751-	750	300	FGJ
CY16C821-	820	300	FGJ
CY16C911-	910	300	FGJ
CY16C102-	1,000	300	FGJ

1/ Complete type designation will include an additional letter symbol to indicate capacitance tolerance.

3.3 Life.

3.3.1 *For qualification inspection.* Capacitors shall meet the following requirements, as applicable:

(a) At 25°C:
  (1) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.002.
(b) At 125°C:
  (1) Insulation resistance – 10,000 megohms or 10 ohmfarads, whichever is less.
  (2) Dissipation factor – Shall not exceed 0.003.

3.3.2 *For quality conformance inspection.*

3.3.2.1 *Performance check.* Capacitors shall meet the following requirements:

(a) Insulation resistance – 100,000 megohms or 100 ohmfarads, whichever is less.
(b) Dissipation factor – Shall not exceed 0.002.

3.4 Quality factor (Q). The Q shall be not less than 2,000.

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:50Z
Check the source to verify that this is the current version before use.

3.5 **Temperature coefficient and capacitance drift.** The temperature coefficient and capacitance drift shall be within the limits specified in table II.

TABLE II. *Temperature coefficient and capacitance drift.*

Temperature coefficient	Capacitance drift (-55° to +125°C)
Parts/million/°C 105 ± 25	0.1 percent or 0.1 pF, whichever is greater.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-C-11272.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-11272.

6. NOTES

6.1 **Notes.** In addition to the notes specified herein, the notes specified in MIL-C-11272 are applicable to this specification.

Custodians:
Army – EL
Navy – EC
Air Force – 11

Review activities:
Army – EL
Navy – EC, SH
Air Force – 11, 17, 85
DSA – ES

User activities:
Army –
Navy –
Air Force – 19

Preparing activity:
Air Force – 11

Agent:
DSA – ES

(Project 5910-0994-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:50Z
Check the source to verify that this is the current version before use.