
MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F05

INACTIVE FOR NEW DESIGN
AFTER 30 JANUARY 1970

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fuse described herein shall consist of this document and the latest issue of Specification MIL-F-15160.

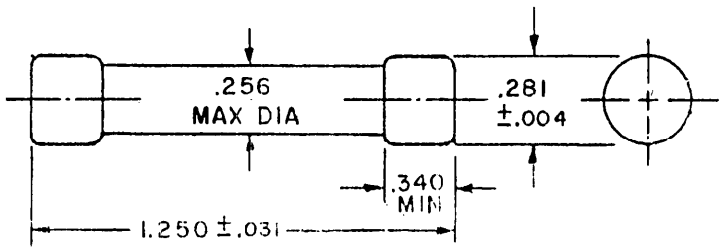

INCHES	MM
.004	.10
.031	.79
.256	6.50
.281	7.14
.340	8.64
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style F05 fuse.

REQUIREMENTS:

Design and construction: See figure 1.
Physical:
Terminals - Ferrule type.
Material - Brass, copper, or copper alloy.
Finish - Nickel, bright alloy plate, or silver when specified.
Strength - Test condition E; 10-ounce-inch torque between ferrules and fuse body.
Body - Glass tube.
Electrical:
© Current rating - See table I.
© Voltage rating - See table I.
© Characteristics A and B - See table I.
Overload interrupt:
Characteristic A - Maximum 1 hour at 135 percent of rated current.
© Characteristic B - Maximum 1 hour at 135 percent of rated current, and minimum of 12 seconds at 200 percent of rated current.
© Short circuit interrupt - Minimum of 10,000 amperes at rated voltage dc.

© denotes changes

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

TABLE I. Type designations (current and voltage ratings).

Style	Characteristic	Maximum voltage	Current rating amperes
F05	A	32V	10A
F05	A	32V	15A
F05	A	32V	20A
F05	A	32V	25A
F05	A	32V	30A
F05	B	250V	1/8A
F05	▲	250V	1/4A
F05	|	250V	6/10A
F05	|	250V	1A
F05	|	125V	2A
F05	|	125V	3A
F05	|	32V	5A
F05	|	32V	10A
F05	|	32V	15A
F05	|	32V	20A
F05	|	32V	25A
F05	▼	32V	30A

© Cross reference. For applicable cross reference see table II. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

© TABLE II. Cross reference.

Superseding number	Superseded numbers			
	81349	96906	71400	75915
F05A32V10A 1/	F05A10R0A 1/	MS90081-1 2/	AGS10	411010
F05A32V15A	F05A15R0A	MS90081-2	AGS15	411015
F05A32V20A	F05A20R0A	MS90081-3	AGS20	411020
F05A32V25A	F05A25R0A	MS90081-4	AGS25	411025
F05A32V30A	F05A30R0A	MS90081-5	AGS30	411030
No Equivalent 3/	F05A35R0A	MS90081-6	AGS35	411035
No Equivalent 3/	F05A40R0A	MS90081-7	AGS40	411040
F05B250V1/8A			MDM1/8	413.125
F05B250V1/4A			MDM1/4	413.250
F05B250V6/10A			MDM6/10	413.600
F05B250V1A			MDM1	413001
F05B125V2A			MDM2	413002
F05B125V3A			MDM3	413003
F05B32V5A			MDM5	413005
F05B32V10A	F05A10R0B	MS90081-8	MDM10	413010
F05B32V15A	F05A15R0B	MS90081-9	MDM15	413015
F05B32V20A	F05A20R0B	MS90081-10	MDM20	413020
F05B32V25A	F05A25R0B	MS90081-11	MDM25	413025
F05B32V30A	F05A30R0B	MS90081-12	MDM30	413030
No Equivalent 3/	F05A35R0B	MS90081-13	MDM35	
No Equivalent 3/	F05A40R0B	MS90081-14	MDM40	

1/ A letter S following the part number signifies silver plating.
2/ A second dash number (-1) signifies silver plating.
3/ Suggest F16 or F62 for current ratings in excess of 30 amperes. F05 and superseded items not suitable for continuous use above 30 amperes.

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, SL
Navy - SH, EC
Air Force - 17, 80
DSA - ES

User activities:
Army - ME, WC, AT
Navy - CG, AS, MC, YD
Air Force - 19

Preparing activity:
Navy - SH

Agent:
DSA - ES

(Project 5920-0350-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 20261O-18T05:40Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF NAVY

DOD 316

U.S.MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:40Z
Check the source to verify that this is the current version before use.