
INCH-POUND
MIL-F-15160/1D
29 October 1990
SUPERSEDING
MIL-F-15160/1C
6 January 1976

MILITARY SPECIFICATION SHEET

FUSES: INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING), STYLE F01

This specification sheet is approved for use by all departments and agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15160.

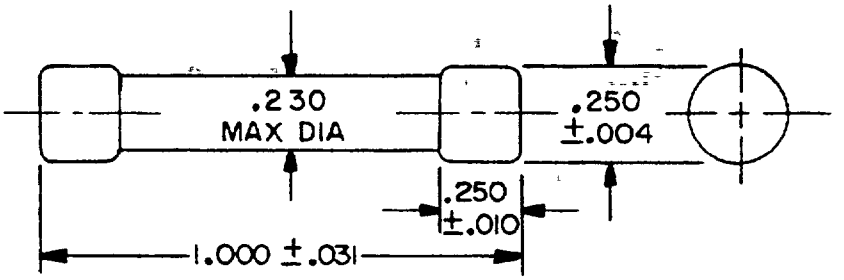

INCHES	MM
0 004	0 10
0 010	0 25
0 031	0 79
0.230	5 84
0.250	6.35
1 000	25 40

NOTES
1. Dimensions are in inches
2. Metric equivalents (to the nearest 0 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm

FIGURE 1 *Style F01, fuse*

AMSC N/A FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. *Design and construction* See figure 1

   Physical:

   Terminal – Ferrule type
   Material – Brass, copper, phosphor bronze, or copper alloy
   Finish – Nickel or bright alloy plate; silver plated when specified
   Strength – MIL-STD-202, method 211, test condition E, 10 ounce-inch torque between ferrules and fuse body
   Body – Glass tube

   Electrical

   Current rating – See table I
   Current carrying capacity – 100 percent of rated current at 2 amperes or less and 110 percent above 2 amperes
   Voltage rating – See table I
   Characteristic – See table I
   Resistance – See table 1
   Overload interrupt – Interrupt within 1 hour at 135 percent of rated current, in addition, fuses rated at 2 amperes and less shall interrupt within 5 seconds at 200 percent
   Short circuit interrupt – See table 1
   Shock – 1/100A thru 5A, MIL-STD-202, method 213, test condition I
   Vibration – 1/100A thru 5A, MIL-STD-202, method 204, test condition A (except 5g, 500Hz)

2. *Type designation* Type designation shall be as shown in table I

3. *Qualification* Required

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:39Z
Check the source to verify that this is the current version before use.

TABLE I. *Type designations and electrical ratings*

Type designation				Maximum resistance ohms[2]	AC short circuit interrupt		
Style	Characteristic	Maximum voltage	Current rating (amperes)[3]		32 volts	125 volts	250 volts
F01	A	250V	1/200A	1,000	10,000A	100A	35A
F01	A	250V	1/100A	600	10,000A	100A	35A
F01	A	250V	1/32A	70	10,000A	100A	35A
F01	A	250V	1/16A	10	10,000A	100A	35A
F01[1]	A	250V	1/10A	9.8	10,000A	100A	35A
F01	A	250V	1/8A	9.5	10,000A	100A	35A
F01[1]	A	250V	3/16A	8 7	10,000A	100A	35A
F01[1]	A	250V	2/10A	8.5	10,000A	100A	35A
F01	A	250V	1/4A	8.2	10,000A	100A	35A
F01	A	250V	3/8A	6.2	10,000A	100A	35A
F01[1]	A	250V	4/10A	4.5	10,000A	100A	35A
F01	A	250V	1/2A	3.7	10,000A	100A	35A
F01[1]	A	125V	6/10A	2.5	10,000A	100A	Not rated
F01	A	125V	3/4A	1.7	10,000A	100A	Not rated
F01[1]	A	125V	8/10A	1 4	10,000A	100A	Not rated
F01	A	125V	1A	1.3	10,000A	100A	Not rated
F01[1]	A	125V	1-1/4A	1 00	10,000A	100A	Not rated
F01	A	125V	1-1/2A	0 21	10,000A	100A	Not rated
F01[1]	A	125V	1-6/10A	0 16	10,000A	100A	Not rated
F01	A	125V	2A	0.12	10,000A	100A	Not rated
F01[1]	A	125V	2-1/2A	–	10,000A	10,000A	Not rated
F01[1]	A	125V	3A	–	10,000A	10,000A	Not rated
F01[1]	A	125V	3-2/10A	–	10,000A	10,000A	Not rated
F01[1]	A	125V	4A	–	10,000A	10,000A	Not rated
F01[1]	A	125V	5A	–	10,000A	10,000A	Not rated

[1]INACTIVE FOR NEW DESIGN AFTER 30 JANUARY 1970
[2]Cold resistance at not greater than 10 percent load
[3]For silver plated terminals the designator "S" is added after the current rating

INSPECTION ROUTINE:

Overload tests (group II): Fuses for the overload interrupt test shall be selected and tested as specified in table II for qualification test.

TABLE II *Overload tests*

Overload[1] (percent)	No of samples		
	1/2A	2A	5A
135	4	4	4
200	4	4	–

[1]Room ambient

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:39Z
Check the source to verify that this is the current version before use.

Short circuit interrupt (group III) Four sample fuses of each rating shown in table III shall be tested at the values specified, followed by the insulation resistance test in accordance with MIL-F-15160 for qualification, and qualification retention. The ac voltage used shall be not less than the circuit voltage indicated and the fuses shall withstand the short circuits specified. Insulation resistance tests shall be conducted within 1 minute following the short circuit test.

TABLE III. *Short circuit tests*

Current rating	Short circuit current	Ac test voltage
1/2A	35A	250
2A	100A	125
5A	10,000A	125

Cross-reference. For applicable cross-reference see table IV. The existing stocks of superseded items may be used. When exhausted, the superseding parts shall be used.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians
Army – ER
Navy – SH
Air Force – 85

Review activities:
Army – MI, AR
Navy – AS, OS, YD,
Air Force – 17, 99
DSA – ES

User activities.
Army – ME, AT
Navy – MC, CG
Air Force - 19

Preparing activity
Navy – SH
(Project 5920-0447-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:39Z
Check the source to verify that this is the current version before use.

TABLE IV. *Cross-reference.*

Superseding No	Superseded numbers							
	81349	96906	71400	71400	75915	75915	75915	98997
F01A250V1/500A[1]	F01GR002A[1]	MS90077-1[2]	AGX1/500	8AG1/500	361 002		364 002	
F01A250V1/200A	F01GR005A	MS90077-2	AGX1/200	8AG1/200	361 005		364 005	
F01A250V1/100A	F01GR010A	MS90077-3	AGX1/100	8AG1/100	361 010		364 010	
F01A250V1/32A	F01GR031A	MS90077-4	AGX1/32	8AG1/32	361 031		364 031	
F01A250V1/16A	F01GR062A	MS90077-5	AGX1/16	8AG1/16	361 062		364 062	8AG1/16
F01A250V1/10A	F01GR100A		AGX1/10	8AG1/10	361 100		364.100	8AG1/10
F01A250V1/8A	F01GR125A	MS90077-6	AGX1/8	8AG1/8	361 125	362 125	364 125	8AG1/8
F01A250V3/16A			AGX3/16	8AG3/16	361 187		364 187	8AG3/16
F01A250V2/10A			AGX2/10	8AG2/10	361 200		364 200	8AG2/10
F01A250V1/4A	F01GR250A	MS90077-7	AGX1/4	8AG1/4	361 250	362.250	364 250	8AG1/4
F01A250V3/8A	F01GR375A	MS90077-8	AGX3/8	8AG3/8	361 375	362.375	364 375	8AG3/8
F01A250V4/10A			AGX4/10	8AG4/10	361 400		364 400	8AG4/0
F01A250V1/2A	F01GR500A	MS90077-9	AGX1/2	8AG1/2	361 500	362.500	364 500	8AG1/2
F01A125V6/10A			AGX6/10	8AG6/10				8AG6/10
F01A125V3/4A	F01GR750A	MS90077-10	AGX3/4	8AG3/4	361 750	362.750	364 750	8AG3/4
F01A125V8/10A			AGX8/10	8AG8/10				8AG8/10
F01A125V1A	F01G1R00A	MS90077-11	AGX1	8AG1	361 001	362001	364001	8AG1
F01A125V11/4A				8AG11/4				8AG11/4
F01A125V11/2	F01G1R50A	MS90077-12	AGX11/2	8AG11/2	36101 5	36201 5	36401 5	8AG11/2
F01A125V16/10A				8AG16/10				8AG16/10
F01A125V2A	F01G2R00A	MS90077-13	AGX2	8AG2	361002	362002	364002	8AG2
F01A125V21/2A			AGX2 1/2					
F01A125V3A			AGX3		361003	362003		
F01A125V31/2A			AGX3 1/2					
F01A125V4A			AGX4		361004			
F01A125V5A			AGX5		361005	362005		

[1]A letter "S" following the part number signifies silver plating
[2]A second dash number (-1) signifies silver plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:39Z
Check the source to verify that this is the current version before use.